
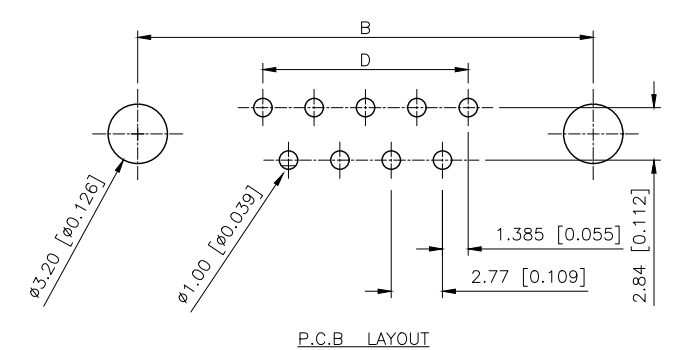


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.22	阿树


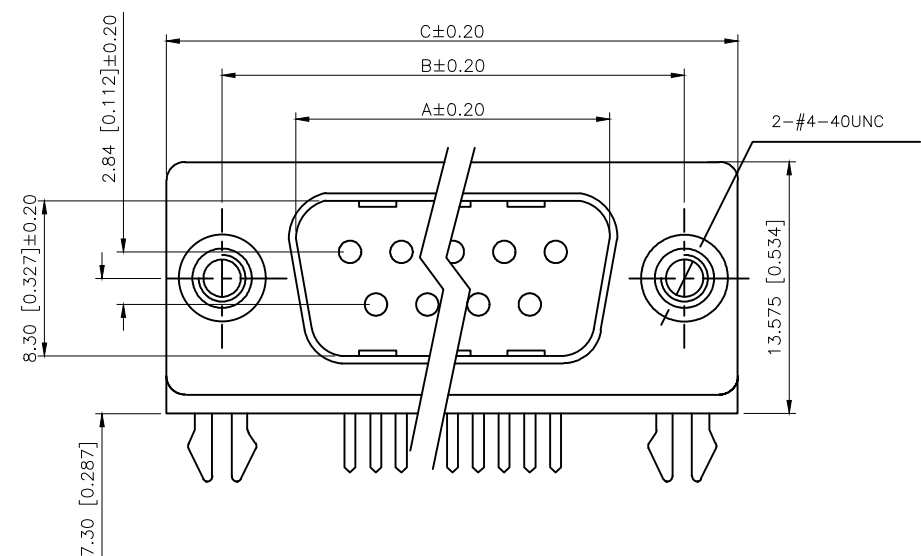


Specifications:
规格:
Current rating:5A AC/DC
额定电流: 5A AC/DC
Voltage rating:250V AC
额定电压: 250V AC
Withstanding voltage:500V AC/MIN
耐受电压: ≥500V AC/分钟
Temperature range:-55℃~+105℃
温度范围: -55℃~+105℃
Insulation resistance:1000MΩMIN
绝缘电阻: ≥1000MΩ
Contact resistance:30mΩMAN
接触电阻:≤30mΩ
Material And FINISHED:
材料和成本:
INSULATOR:PBT UL 94V-0
绝缘体: PBT UL 94V-0
SHELL: Steel
外壳: 钢
CONTACT MATERIAL:Brass
触点材料: 黄铜

PART NO.:

X03 09 W T 17 B 2 H
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series NO.
- ②Row No.Pin No.XX-09;15;25;37
- ③Welding Board Angle :W-Male
- ④T: Traditional
- ⑤Planting Category: 1:Gold 1u ;2:Gold 2u; 3:Gold 3u ;4:Gold 5u; 5:Gold 15u; 6:Gold 30u ;
7:Terminal half- Gold Bright Tin;8:Terminal half- Gold 2u Bright Tin
9:Terminal half- Gold 3u Bright Tin;10:Terminal half- Gold 5u Bright Tin
11:Terminal half- Gold 15u Bright Tin;12:Terminal half- Gold 30u Bright Tin
13:Terminal half- Gold Matte Tin;14:Terminal half- Gold 2u Matte Tin
15:Terminal half- Gold 3u Matte Tin;16:Terminal half- Gold 5u Matte Tin
17:Terminal half- Gold 15u Matte Tin;18:Terminal half- Gold 30u Matte Tin
- ⑥Color:B:Black W:White BL:Blue
- ⑦1:TYPE-1; 2:TYPE-2;
- ⑧H:Heightened

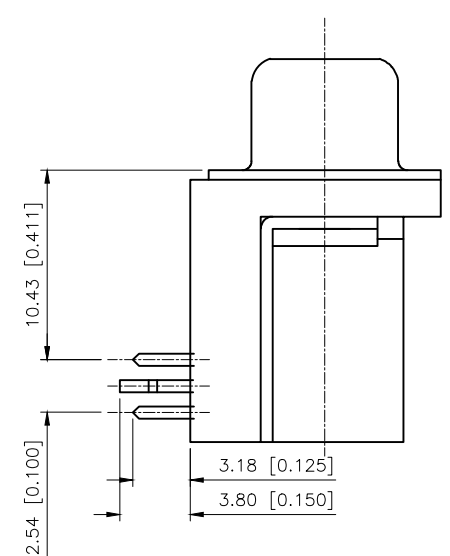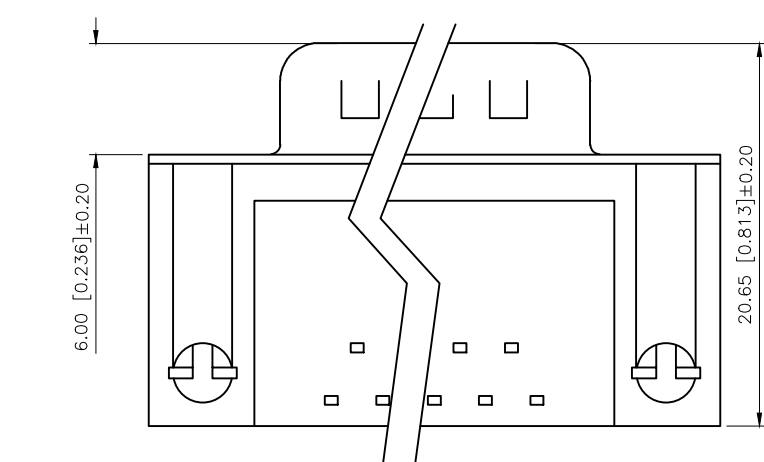

NO.OF CONTACT	A±0.20	B±0.20	C±0.20	D
09	16.92	24.99	30.81	11.08
15	25.25	33.32	39.14	19.39
25	38.96	47.04	53.04	33.24
37	55.42	63.50	69.32	49.86

铆合方式	TYPE-1:Riveting (铆合)	TYPE-2:Riveted lock screws (铆钉实心螺母)
图示		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:
CHECKED		UNIT: mm/in
APPROVED		SIZE: A4

MODEL TYPE: D-SUB
PART NO.: X0309WT17B2H
DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE N/A	PAGE 1/1	REVISION A1
--------------	-------------	----------------