



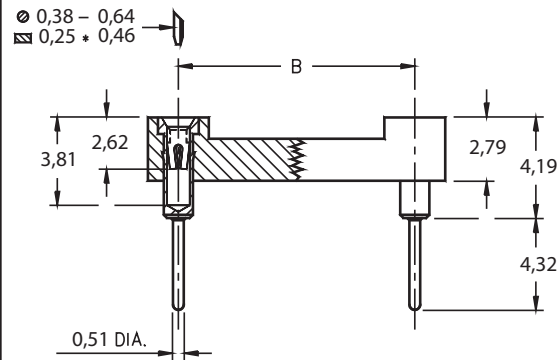

- DIP sockets with increased solder tail length of 4,32, allowing application on multilayer PCBs up to 3,53mm thickness. Other lengths available upon request.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #0134 pin. See page 134 for details.

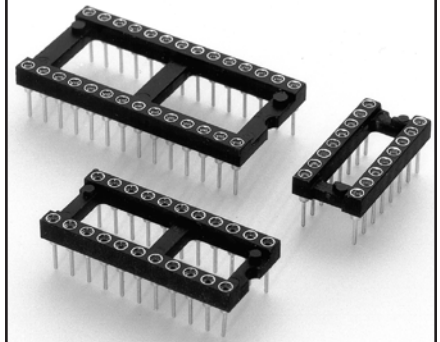

Total number of pins				Quantity per tube	Ordering Information				
	A	B	C						
10	12,6	5,08	7,6	40	XX= Plating Code See Below				
4	5,0	7,62	10,1	102					
6	7,6	7,62	10,1	67					
8	10,1	7,62	10,1	50					
10	12,6	7,62	10,1	40					
14	17,7	7,62	10,1	28					
16	20,3	7,62	10,1	25					
18	22,8	7,62	10,1	22					
20	25,3	7,62	10,1	20					
22	27,8	7,62	10,1	18					
24	30,4	7,62	10,1	16	For RoHS compliance, select plating code. For the all gold option (XX=13) also change part number from 111-XX-XXX-41-001000 to 111-13-XXX-41-001100				
28	35,5	7,62	10,1	14					
20	25,4	10,16	12,7	20					
22	27,8	10,16	12,7	18					
24	30,4	10,16	12,7	16					
28	35,5	10,16	12,7	14					
32	40,6	10,16	12,7	12					
24	30,5	15,24	17,7	16					
28	35,5	15,24	17,7	14					
32	40,6	15,24	17,7	12					
36	45,7	15,24	17,7	11	RoHS 2002/95/EC				
40	50,8	15,24	17,7	10					
42	53,3	15,24	17,7	9					
48	60,9	15,24	17,7	8					
50	63,5	15,24	17,7	8					
52	66,0	15,24	17,7	7					
50	63,5	22,86	25,3	8					
52	66,0	22,86	25,3	7					
64	81,2	22,86	25,3	6					
SPECIFY PLATING CODE XX=				13					93
Sleeve (Pin)				0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb		5,08µm Sn	5,08µm Sn
Contact (Clip)				0,76µm Au	0,76µm Au	5,08µm Sn/Pb		0,76µm Au	5,08µm Sn