
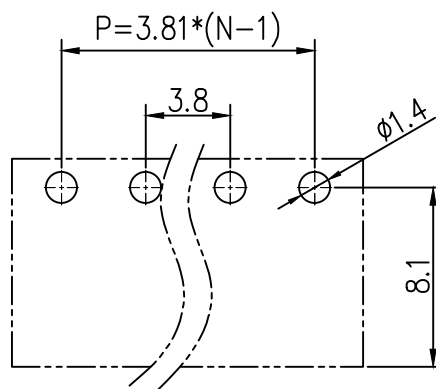
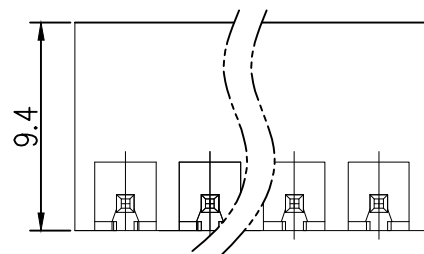
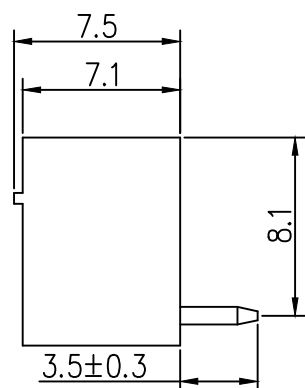


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

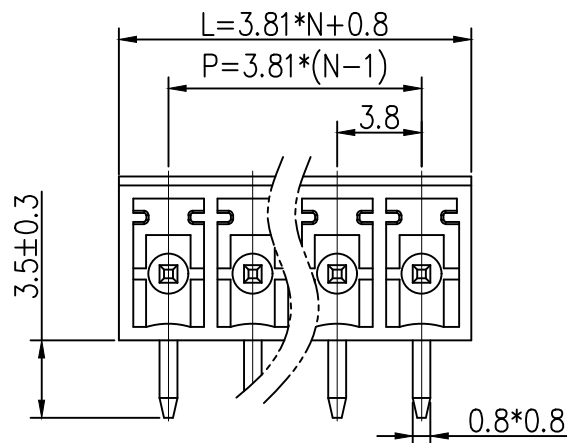

PCB LAYOUT

Materials and Electroplating

- ①. Plastic body: PA66
- ②. Solder pin: copper, Nickel tin plating

Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

mechanical properties

Temperature range: $-40\text{ }^{\circ}\text{C}\sim+105\text{ }^{\circ}\text{C}$ Instantaneous temperature: $+250\text{ }^{\circ}\text{C}$, 5 seconds

2	插针	铜	镀镍锡	
1	底座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注




深圳市虹成电子有限公司

品名 TITLE	接线端子
料号 PART NO	HC-JXDZRC-3.81-12P

GENERAL TOLERANCES
(UNLESS SPECIFIED)比 例
SCALE

1:1



公差参数	公差
2-6P	± 0.10
7-12P	± 0.20
13-18P	± 0.25
19-24P	± 0.30

DimP	± 0.20
DimL	± 0.30
X.X	± 0.35
X.XX	± 0.25
X.XXX	± 0.15

单位 UNIT	MM
张数 PART NO	1 OF 1
版本 REV	A

制图 DRAW	AhYe
审核 CHECKED	夏操云
批准 APPROVE	赵亮亮

