

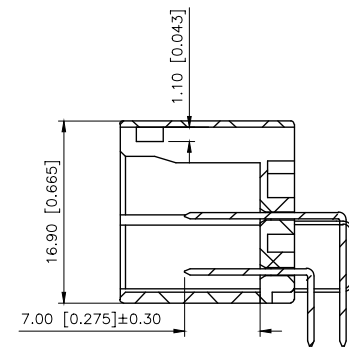

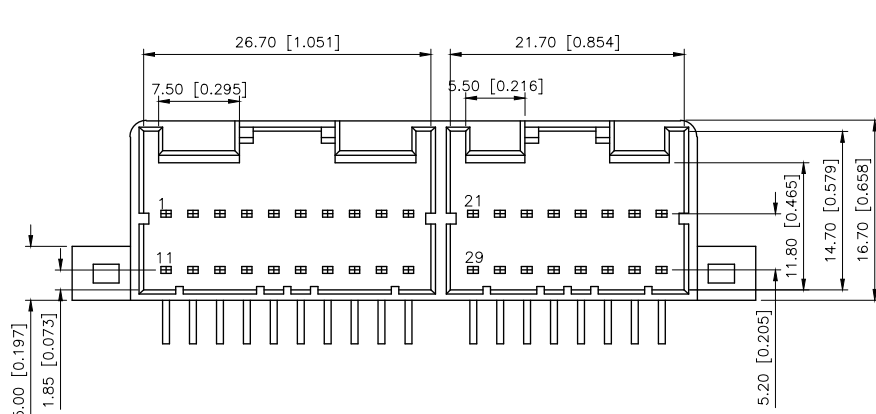


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.01.07	阿树

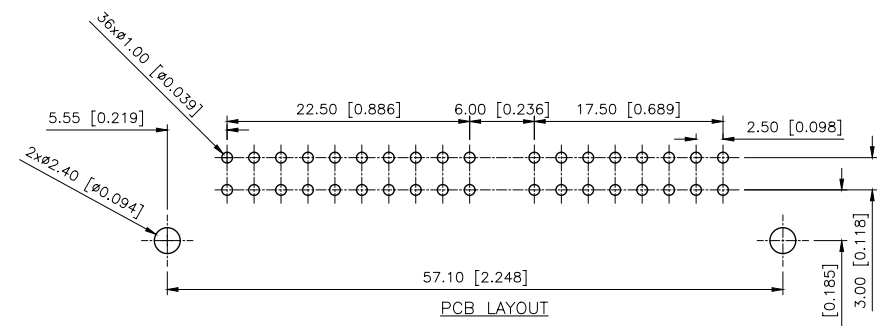

Current rating:3A AC/DC
额定电流: 3A AC/DC
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃

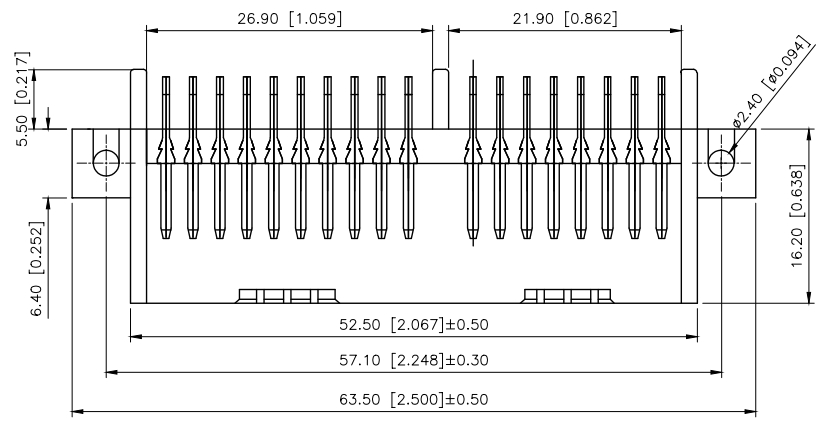

PART NO.:
K 174051 W R-2xXX-PT SN
① ② ③ ④ ⑤ ⑥ ⑦
①K:XKBTEK-Car Connector
②XKB Series No
③Category:W-Wafer
④Welding Board Range:R-Straight 90°
⑤Row No.Pin No:2xXX-2x18 Pin
⑥Material:PT-PBT
⑦Plating:SN-Plated Tin

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



K174051WR-2xXX-PTSN		PBT	Brass	K174051H-2x10 K174051H-2x08
PART NO		Material	Material(Pin)	Suitable XKB Housing
DESIGN	阿树	VIEW:		MODEL TYPE: 2.5mm Automobile connector
CHECKED		UNIT: mm/in		PART NO.: K174051WR-2x18-PTSN
APPROVED		SIZE: A4		DWG NO.:
SCALE			PAGE	REVISION
N/A			1/1	A1