

Pitch:2.00x2.00mm(0.079 " x0.079 ")
Board Spacer Dual Rows Right Angle Dip Type

ELETE
—Professional Connecting Solution—
HMLDRHXX Series

Specifications


Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available


Mating with




HFLDSXX





HFLDR63




HFLDMXX



HFLDS72

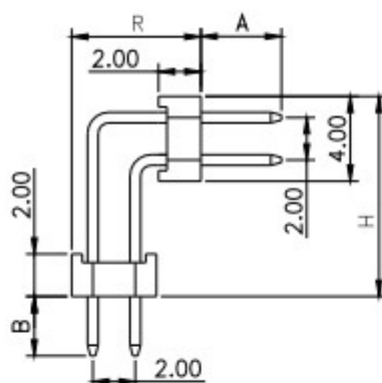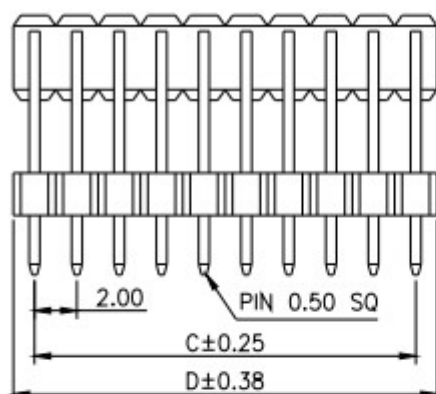

Recommended
P.C.Board
Hole Layout




HFLDP63



HFLDR72



HFLDM51



HFLDR51

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
03	4.00	6.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
04	6.00	8.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
05	8.00	10.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
06	10.00	12.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
07	12.00	14.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
08	14.00	16.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
09	16.00	18.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00	40	78.00	80.00
11	20.00	22.00	21	40.00	42.00	31	60.00	62.00			