

Pitch:2.00x2.00mm(0.079 " x0.079 ")

Female Header Side Entry Right Angle Dip Type

ELETE
—Professional Connecting Solution—
HFLDR51 Series


Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃


Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

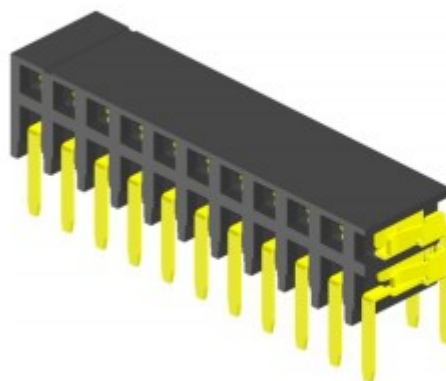


Mating with



HMLDSXX



HMLDSHXX



HMLDMHXX





HMLDR43




HMLDMXX

Recommended
P.C.Board
Hole Layout





HMLDS43



HMLDPXX



HMLDRXX

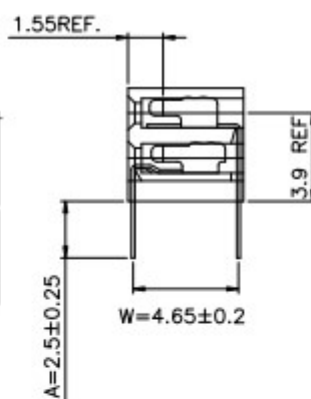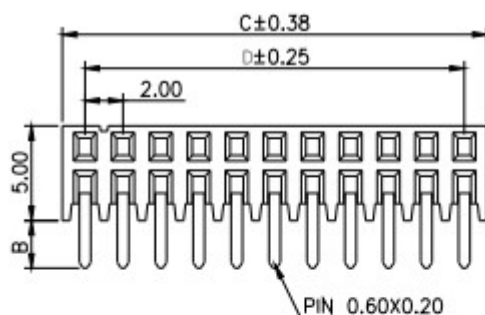

PS:Suggested Mating Pin Length:3.0~4.1 mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	D	C		D	C		D	C		D	C
02	2.00	4.40	08	14.00	16.40	14	26.00	28.40	20	38.00	40.40
03	4.00	6.40	09	16.00	18.40	15	28.00	30.40	21	40.00	42.40
04	6.00	8.40	10	18.00	20.40	16	30.00	32.40	22	42.00	44.40
05	8.00	10.40	11	20.00	22.40	17	32.00	34.40	23	44.00	46.40
06	10.00	12.40	12	22.00	24.40	18	34.00	36.40	24	46.00	48.40
07	12.00	14.40	13	24.00	26.40	19	36.00	38.40	25	48.00	50.40