


Surface Mount Zener Diode



SOD-123

Features:

- Planar Die Construction
- 500mW Power Dissipation On Ceramic PCB
- General Purpose, Medium Current
- Ideally Suited For Automated Assembly Processes

Applications:

- Zener diode
- Ultra-small surface mount package

Maximum Ratings:

Ratings at 25°C unless otherwise specified.

Characteristic	Symbol	Value	Unit
Forward voltage at $I_F=10\text{mA}$	V_F	0.9	V
Power dissipation	P_D	500	mW
Thermal resistance, junction to ambient air	$R_{\theta JA}$	305	°C/W
Junction and storage temperature range	T_J, T_{stg}	-65 to +150	°C

Note :

Device mounted on ceramic PCB 7.6mm × 9.4mm × 0.87mm with pad areas 25mm².

Short duration test pulse used to minimize self-heating effect.

When provided, otherwise, parts are provided with date code only, and type number identifications appears on reel only.

f = 1kHz.

Surface Mount Zener Diode



Electrical Characteristics:

Ratings at 25°C unless otherwise specified.

Part Number	Marking Code	Zener Voltage Range				Max. Zener Impedance			Max. Reverse Current		Temperature Coefficient of zener voltage @ I_{ZTC} mV/°C		Test Current I_{ZTC}
		$V_Z@I_{ZT}$			I_{ZT}	$Z_{ZT}@I_{ZT}$	$Z_{ZK}@I_{ZK}$	I_{ZK}	I_R	@ V_R			
		Nom.(V)	Min.(V)	Max.(V)	mA	Ω		mA	μA	V	Min.	Max.	mA
BZT52C5 V1-7-F	W8	5.1	4.8	5.4	5	60	480	1	2	2	-2.7	1.2	5

Typical Characteristics:

$T_A = 25^\circ\text{C}$ unless otherwise specified.

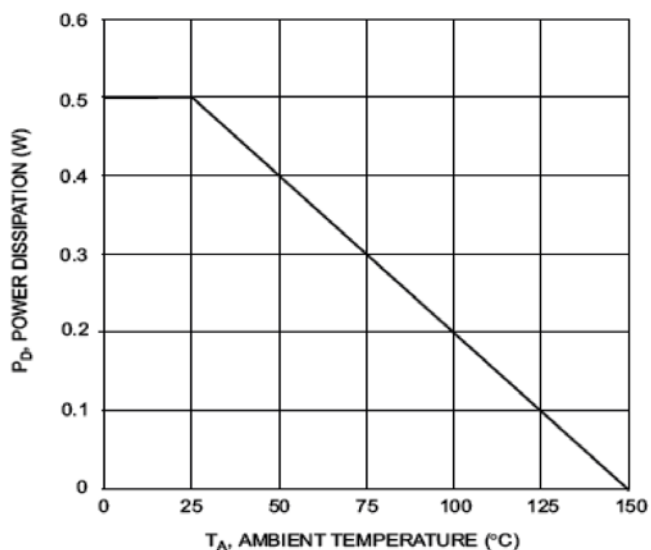


Fig. 1 Power Dissipation vs Ambient Temperature




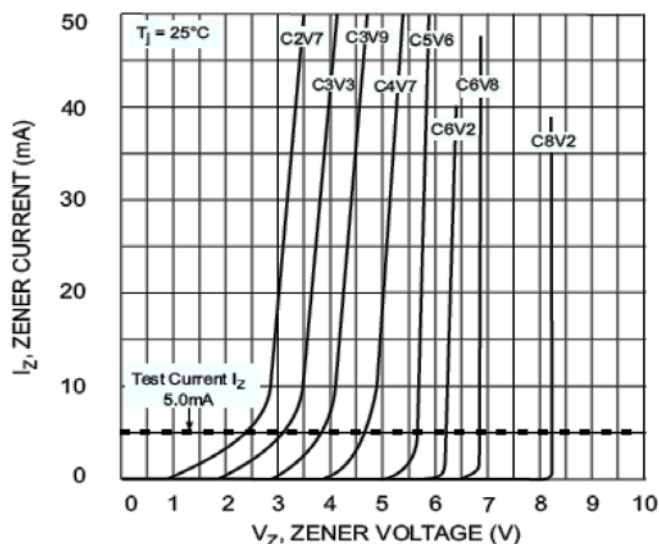


Fig. 2 Zener Breakdown Characteristics

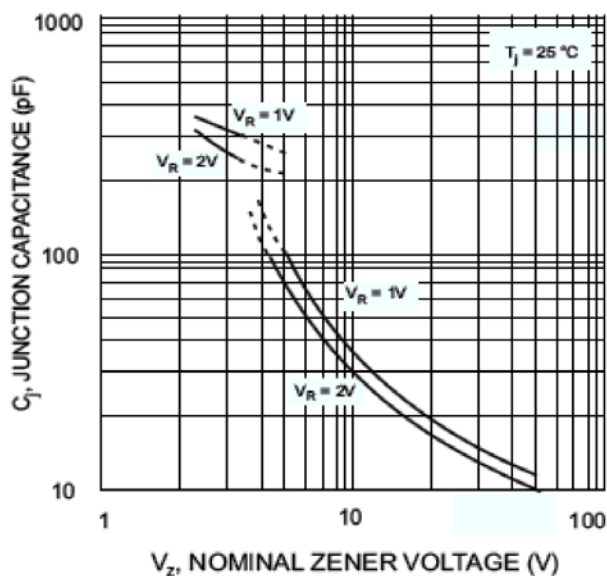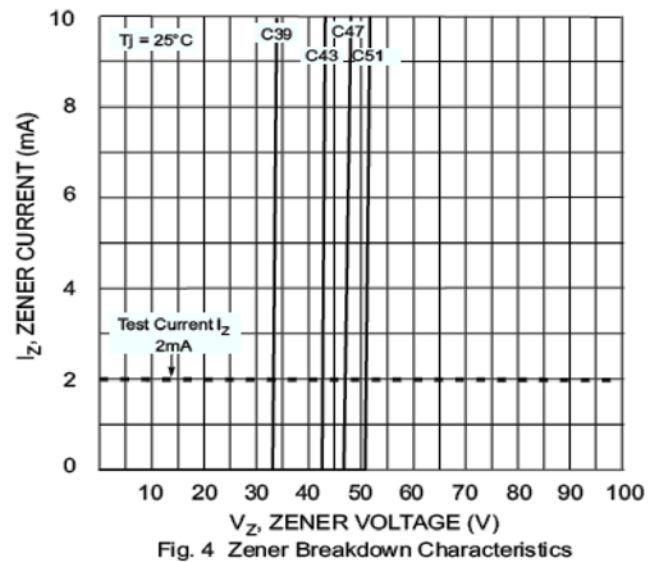


Surface Mount Zener Diode

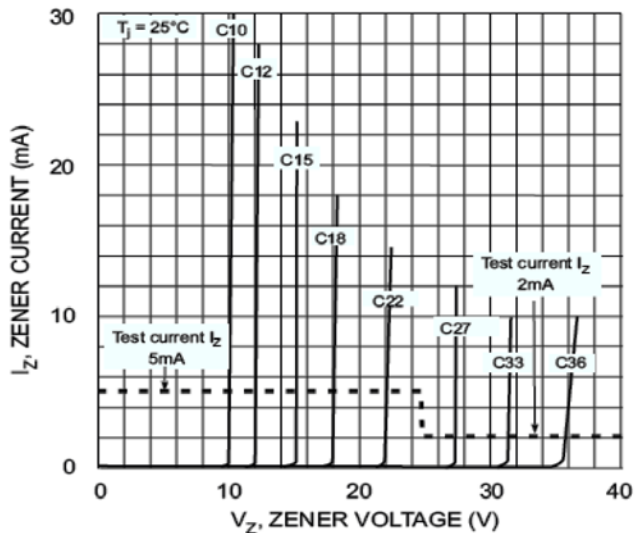

Package Outline:


Plastic surface mounted package

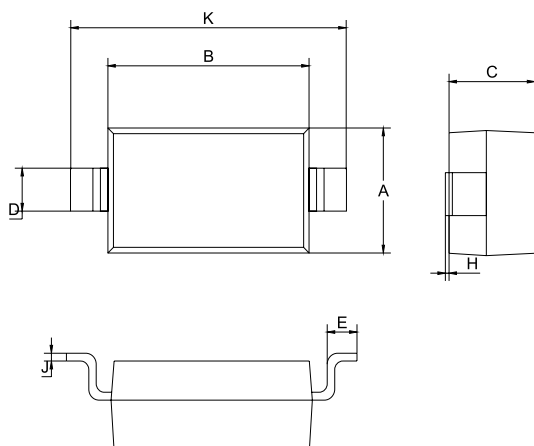

SOD-123		
Dim.	Min.	Max.
A	1.4	1.8
B	2.55	2.85
C	1.15 Typ.	
D	0.5	0.6
E	0.3	0.4
H	0.02	0.1
J	0.1 Typ.	
K	3.55	3.85

Dimensions : Millimetres

Soldering Footprint:

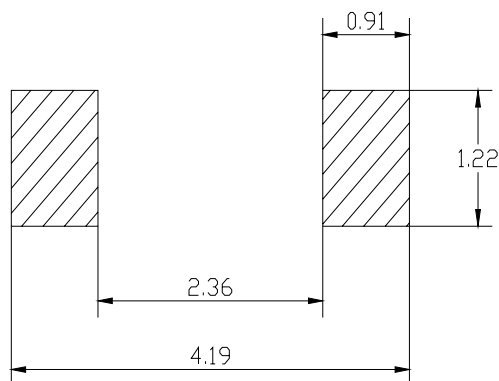

Dimensions : Millimetres

Package Information:

Device	Package	Shipping
BZT52C5V1-7-F	SOD-123	3,000 / Tape & Reel

Part Number Table

Description	Part Number
Surface Mount Zener Diode	BZT52C5V1-7-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.