
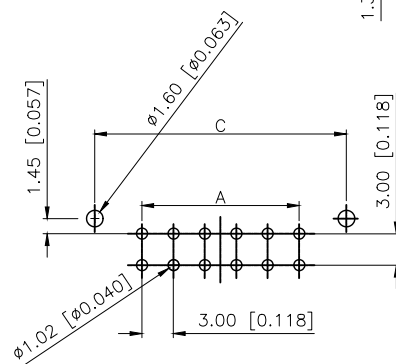



	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2024.07.20	阿 树
A2	N/A		产品材质及料号变更	2025.10.11	阿 树

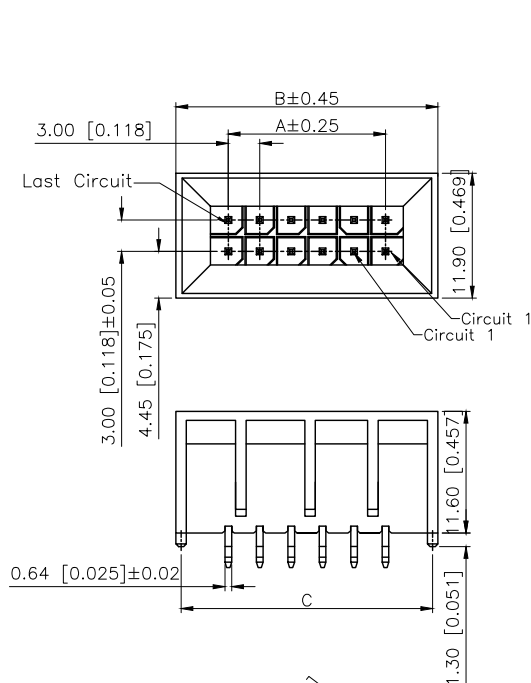


Specifications (规格):

- 1.Voltage rating(额定电压):DC 250V
- 2.Current rating(额定电流):5A AC/DC
- 3.Withstanding voltage(耐压值): $\geq 1000V$ AC/minute
- 4.Insulation resistance(绝缘电阻): $\geq 1000M\Omega$ Min
- 5.Contact resistance(接触电阻): $\leq 20m\Omega$ Max
- 6.Temperature range(使用温度): $-40^{\circ}C \sim +125^{\circ}C$

PART NO.:

X3025 W V-2x08 H-9T SN
① ② ③ ④ ⑤ ⑥ ⑦

①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Row No~Pin No: 2xXX~2x02P~2x12P
⑤Special NO:H-DIP=3.3mm(Common Type with Kink)
⑥Material: 9T-PA9T UL94V-0 Black
⑦Plating:SN-Bright tin 100u"Min;Ni 50u"Min

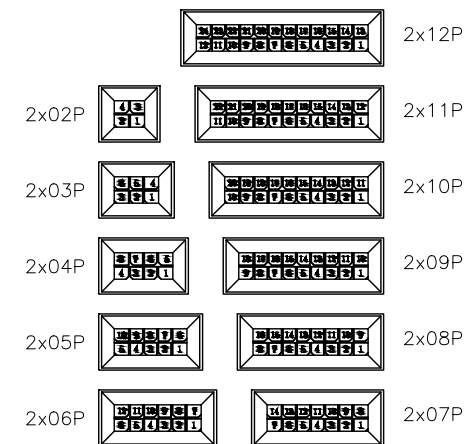

CIRCUIT SIZE LAYOUT

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2x02	3.00	13.00	12.00	2x08	21.00	31.00	30.00
2x03	6.00	16.00	15.00	2x09	24.00	34.00	33.00
2x04	9.00	19.00	18.00	2x10	27.00	37.00	36.00
2x05	12.00	22.00	21.00	2x11	30.00	40.00	39.00
2x06	15.00	25.00	24.00	2x12	33.00	43.00	42.00
2x07	18.00	28.00	27.00				

X3025WV-2x08H-9TSN	PA9T	Brass	X3025HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW: 	MODEL TYPE: 3.00 mm Crimp Style Connector		
CHECKED		UNIT: mm/in	PART NO.: X3025WV-2x08H-9TSN		
APPROVED		SIZE: A4	DWG NO.: X-X3025WV-2x08H-9TSN		
PRECISION CO., LIMITED			SCALE N/A	PAGE 1/1	REVISION A2