
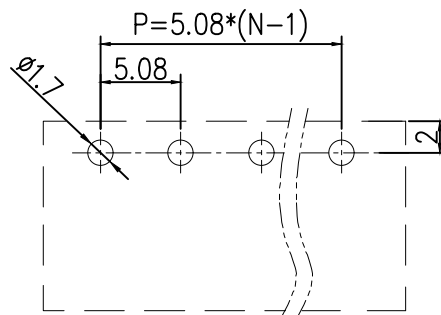
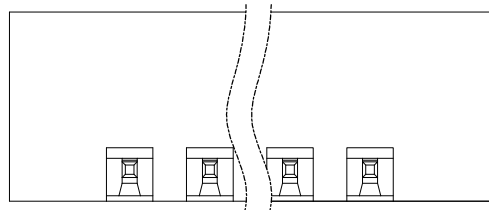
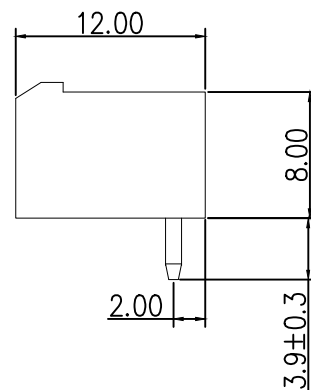
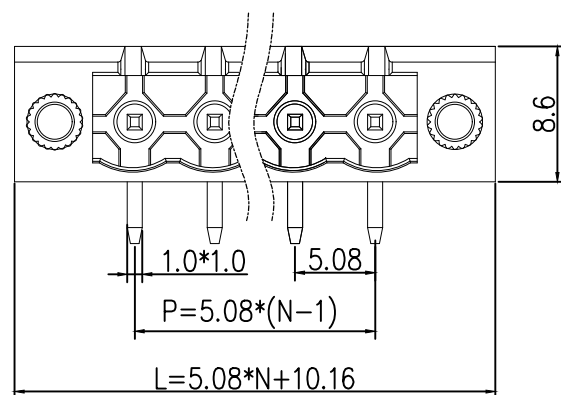


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

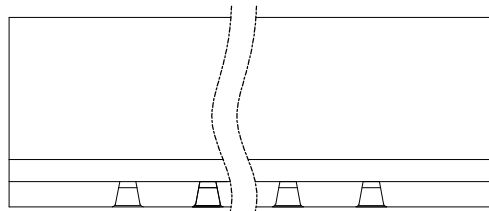

PCB LAYOUT

Materials and Electroplating

- ①. Plastic body: PA66
- ②. Solder pin: copper, nickel tin plated
- ③. Nut: Copper, Nickel Plated

Electrical performance

Rated voltage: 300V

Rated current: 15A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1min

mechanical properties

Temperature range: -40 ℃~+105 ℃

Instantaneous temperature: +250 ℃, 5 seconds

2	插针	铜	镀镍锡	
1	基座	PA66	绿色	
序号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE		接线端子	
料 号 PART NO		HC-JXDZRM-5.08-10P	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1
单 位 UNIT		制 图 DRAW	AhYe
张 数 PART NO		审 核 CHECKED	夏操云
版 本 REV		批 准 APPROVE	赵亮亮

公差参数	未注明公差:
2-6P ±0.10 ±0.20	Δ. xxx ±0.15
7-12P ±0.20 ±0.30	Δ. xx ±0.25
13-18P ±0.25 ±0.40	Δ. x ±0.35
19-24P ±0.30 ±0.50	

