



WAGO Ribbon Cables

for 289/704 Series

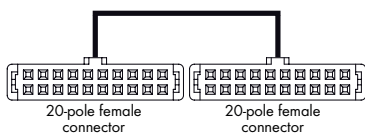

WAGO ribbon cables provide fast and easy connection of WAGO I/O modules equipped with a ribbon cable connector (750-1400, -1402, -1500, -1501, 1502) to appropriate interface or relay modules (16-channel) featuring a 20-pole female connector. The cables are available in 1-, 2- and 3-meter lengths; each has one 20-pole female connector at both ends.



WAGO ribbon cables provide fast and easy connection of WAGO I/O modules equipped with a ribbon cable connector (750-1400, -1402, -1500, -1501, 1502) to appropriate interface or relay modules featuring a 10-pole female connector. For example, this cable connects 2 relay modules (8-channel) to a WAGO I/O module. The cables are available in 1- and 2-meter lengths; each has one 20-pole and two 10-pole female connectors on the ends.

Description	Item No.	Pack. Unit
WAGO ribbon cable 20/20, length 1 m	706-3057/300-100	1
WAGO ribbon cable 20/20, length 2 m	706-3057/300-200	1
WAGO ribbon cable 20/20, length 3 m	706-3057/300-300	1
WAGO ribbon cable 20/20, length 2 m, UL Approval	706-3057/1300-200	1
Technical Data		
Ports	2 x 20-pole female connector acc. to DIN 41651	
Wire cross-section	0.14 mm ² LiYY	
Color coding	acc. to DIN VDE 47100	
Current per channel	max. 1A	
Operating temperature	-25°C ... +70°C	
Degree of protection	IP20	
Length	1 m (706-3057/300-100)	
	2 m (706-3057/300-200, 706-3057/1300-200)	
	3 m (706-3057/300-300)	

Description	Item No.	Pack. Unit
WAGO ribbon cable 20/2x10, length 1 m	706-7753/302-100	1
WAGO ribbon cable 20/2x10, length 2 m	706-7753/302-200	1
Technical Data		
Ports	1 x 20-pole / 2 x 10-pole female connector	
Wire cross-section	0.14 mm ² LiYY	
Color coding	acc. to DIN VDE 47100	
Current per channel	max. 1A	
Operating temperature	-25°C ... +70°C	
Degree of protection	IP20	
Length	1 m (706-7753/302-100)	
	2 m (706-7753/302-200)	