

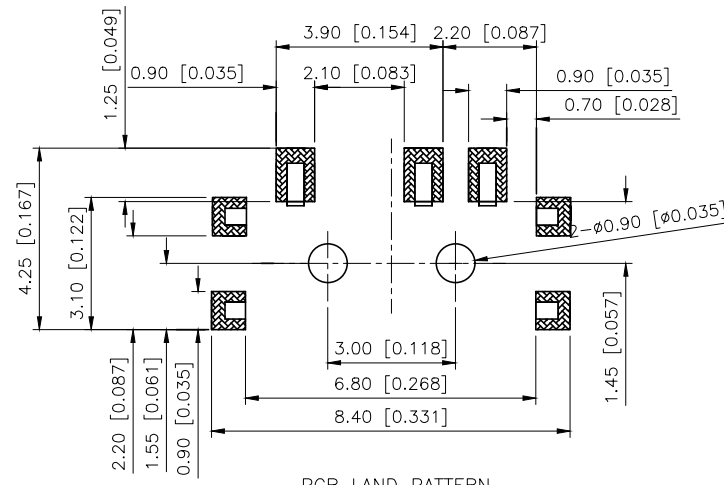

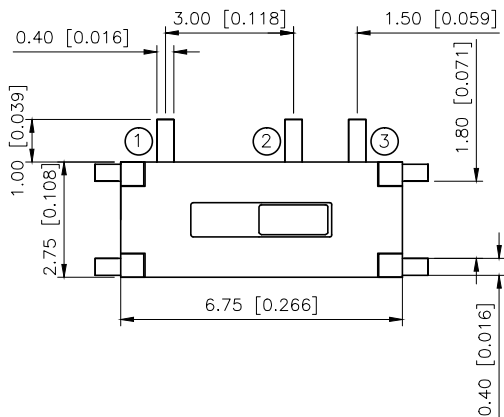
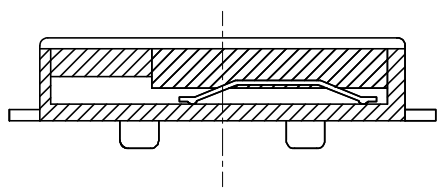


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.21	阿树

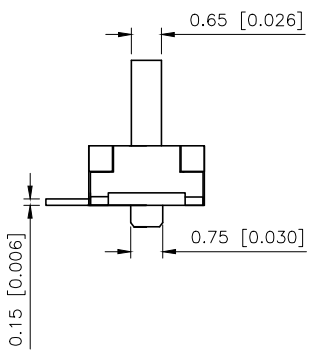

NOTE:  
 Rating: DC 12V 50mA  
 Operating Force: 200±100gf  
 Lifetime: 10,000 Cycles

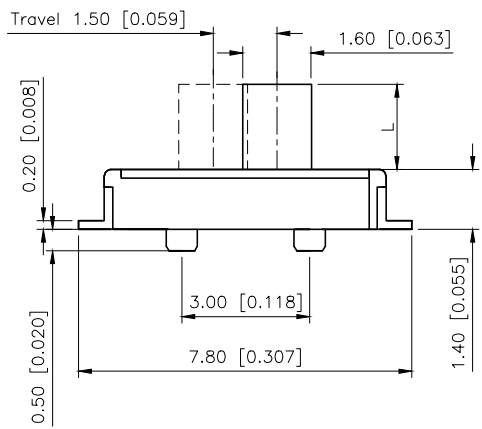

PAPT NO	L	Color
SS-3292S-L1	1.5	B:black W:white
SS-3292S-L2	2.0	
SS-3292S-L3	3.0	

5	Terminal	7	Brass (0.30t)	Ag Plated
4	Contact spring	1	Phosphor bronze	Ag Plated
3	Base	1	LCP	Black
2	Cover	1	Sus	Natural
1	Keystake	1	PA46	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SS-3292S-X-X
APPROVED		SIZE:	A4	DWG NO.:	