


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/12/19	A	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

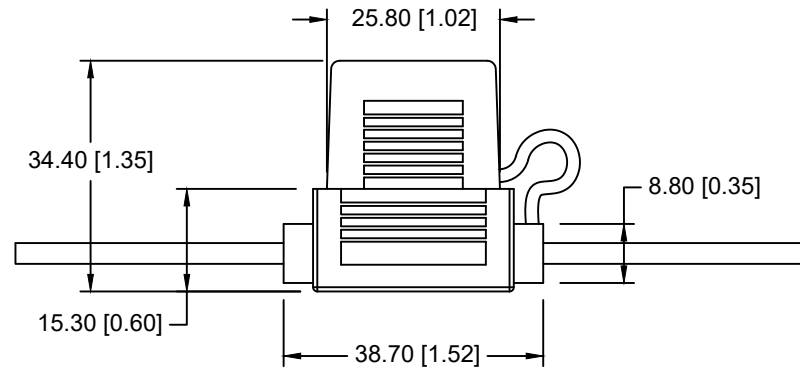

WATER RESISTANT TYPE

NOTES:

1. MATERIAL:

HOUSING : PVC ,UL94V-0, FLEX 60GPVC, UL FILE NO. E174939

2. WIRE: RED WIRE, 16 AWG, UL 1015, 600V, 105°C,
FLAME RATED VW-1, UL FILE NO. E250011 OR ENGINEERING
APPROVED EQUIVALENT

3. RATED CURRENT: 30A

4. ACCEPTS ATP/ATC/ATO FUSES

5. INSULATION RESISTANCE AT 500V DC: 100MΩ MIN

6. CONTACT RESISTANCE: 5mΩ AT 1A DC

7. DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1000V MIN
ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal	Scale	Drawn By B.S.
	±.5 (.020)		Approved By T.B.
Fractional	Title		
± .8 (.030)	INLINE FUSE HOLDER		
Angular	Date	Drawing Number	
± 3°	04/12/19	BF353	