


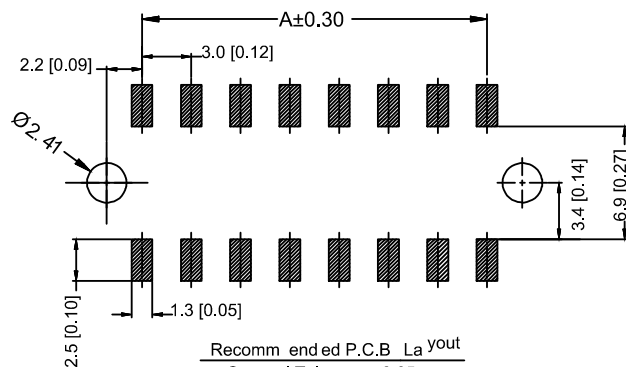
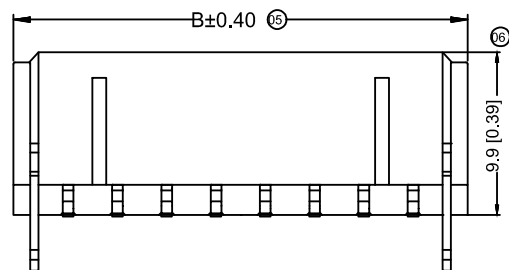
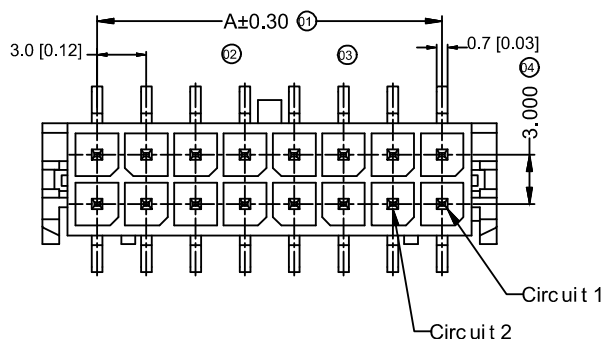





Recommended P.C.B Layout
General Tolerance ±0.05

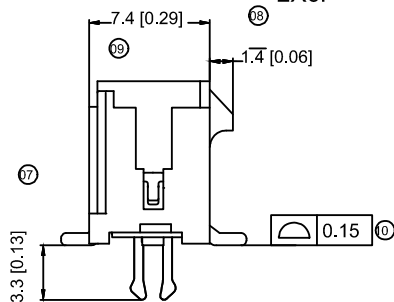


2X1PIN




2X12PIN




2X2PIN




2X11PIN




2X3PIN




2X10PIN




2X4PIN




2X9PIN




2X5PIN



2X8PIN



2X6PIN



2X7PIN

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10m Ω
- After environmental testing : ≤20m Ω

X3025WVS-2x05C-LPSW

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Category : W-wafer
③ Welding Board Angle: V-Stright 180°
④ Welding Way: S-SMT
⑤ Row No.-Pin No.: 2*XX-2*01P~2*12P
⑥ Plug the Pin & Special No.: C-The Harpoon
⑦ Material : LP-LCP 94V-0
⑧ Planting Category:
SN-Bright tin plating ; SW-Matte Tin plating
⑨ Color : Blank-Natural color

Pole s	Dimensions(mm)		Pole s	Dimensions(mm)	
	A	B		A	B
2*01	—	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

X3025WVS-2x05C-LPSW		Brass	Matte tin	Brass	Matte tin	X3025H
X3025WVS-2x05C-LPSN			Tin-Plated		Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With XKB Housing

				XKB	ANGULAR	±5°
ΔX					L ≤ 4	±0.2
ΔX					4 < L ≤ 16	±0.3
ΔX					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS						
UNSPECIFIED TOLERANCES						
www.helloxkb.com						

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.00 mm Crimp Style Connectors
DWN		DATE		VIEW:	PART NO.: X3025WVS-2x05C-LPSW
CHKD		DATE		UNIT: mm/in	DWG NO.: X3025WVS-2x05C-LPSW
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0