



Overload relay 20...80 A Electronic For motor protection Size S2, Class 10E  
 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

|                                                                                            |                                                                          |
|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>product brand name</b>                                                                  | SIRIUS                                                                   |
| <b>product designation</b>                                                                 | solid-state overload relay                                               |
| <b>product type designation</b>                                                            | 3RB3                                                                     |
| <b>General technical data</b>                                                              |                                                                          |
| <b>size of overload relay</b>                                                              | S2                                                                       |
| <b>size of contactor can be combined company-specific</b>                                  | S2                                                                       |
| power loss [W] for rated value of the current at AC in hot operating state                 | 4.6 W                                                                    |
| • per pole                                                                                 | 1.53 W                                                                   |
| insulation voltage with degree of pollution 3 at AC rated value                            | 690 V                                                                    |
| <b>surge voltage resistance rated value</b>                                                | 6 kV                                                                     |
| <b>maximum permissible voltage for protective separation</b>                               |                                                                          |
| • in networks with ungrounded star point between auxiliary and auxiliary circuit           | 300 V                                                                    |
| • in networks with grounded star point between auxiliary and auxiliary circuit             | 300 V                                                                    |
| • in networks with ungrounded star point between main and auxiliary circuit                | 600 V                                                                    |
| • in networks with grounded star point between main and auxiliary circuit                  | 690 V                                                                    |
| <b>shock resistance</b>                                                                    | 15g / 11 ms                                                              |
| • according to IEC 60068-2-27                                                              | 15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms |
| <b>thermal current</b>                                                                     | 80 A                                                                     |
| <b>reference code according to IEC 81346-2</b>                                             | F                                                                        |
| <b>Substance Prohibition (Date)</b>                                                        | 10/15/2014                                                               |
| <b>SVHC substance name</b>                                                                 | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8               |
| <b>Ambient conditions</b>                                                                  |                                                                          |
| installation altitude at height above sea level maximum                                    | 2 000 m                                                                  |
| <b>ambient temperature</b>                                                                 |                                                                          |
| • during operation                                                                         | -25 ... +60 °C                                                           |
| • during storage                                                                           | -40 ... +80 °C                                                           |
| • during transport                                                                         | -40 ... +80 °C                                                           |
| <b>temperature compensation</b>                                                            | -25 ... +60 °C                                                           |
| relative humidity during operation                                                         | 10 ... 95 %                                                              |
| <b>Main circuit</b>                                                                        |                                                                          |
| <b>number of poles for main current circuit</b>                                            | 3                                                                        |
| <b>adjustable current response value current of the current-dependent overload release</b> | 20 ... 80 A                                                              |
| <b>operating voltage</b>                                                                   |                                                                          |
| • rated value                                                                              | 690 V                                                                    |
| • at AC-3e rated value maximum                                                             | 690 V                                                                    |

|                                                                               |                                                                |
|-------------------------------------------------------------------------------|----------------------------------------------------------------|
| <b>operating frequency rated value</b>                                        | 50 ... 60 Hz                                                   |
| <b>operational current rated value</b>                                        | 80 A                                                           |
| operational current at AC-3e at 400 V rated value                             | 80 A                                                           |
| <b>operating power</b>                                                        |                                                                |
| • for 3-phase motors at 400 V at 50 Hz                                        | 11 ... 37 kW                                                   |
| • for AC motors at 500 V at 50 Hz                                             | 15 ... 55 kW                                                   |
| • for AC motors at 690 V at 50 Hz                                             | 18.5 ... 75 kW                                                 |
| <b>Auxiliary circuit</b>                                                      |                                                                |
| <b>design of the auxiliary switch</b>                                         | integrated                                                     |
| <b>number of NC contacts for auxiliary contacts</b>                           | 1                                                              |
| • note                                                                        | for contactor disconnection                                    |
| <b>number of NO contacts for auxiliary contacts</b>                           | 1                                                              |
| • note                                                                        | for message "tripped"                                          |
| number of CO contacts for auxiliary contacts                                  | 0                                                              |
| <b>operational current of auxiliary contacts at AC-15</b>                     |                                                                |
| • at 24 V                                                                     | 4 A                                                            |
| • at 110 V                                                                    | 4 A                                                            |
| • at 120 V                                                                    | 4 A                                                            |
| • at 125 V                                                                    | 4 A                                                            |
| • at 230 V                                                                    | 3 A                                                            |
| <b>operational current of auxiliary contacts at DC-13</b>                     |                                                                |
| • at 24 V                                                                     | 2 A                                                            |
| • at 60 V                                                                     | 0.55 A                                                         |
| • at 110 V                                                                    | 0.3 A                                                          |
| • at 125 V                                                                    | 0.3 A                                                          |
| • at 220 V                                                                    | 0.11 A                                                         |
| <b>Protective and monitoring functions</b>                                    |                                                                |
| <b>trip class</b>                                                             | CLASS 10E                                                      |
| <b>design of the overload release</b>                                         | electronic                                                     |
| <b>UL/CSA ratings</b>                                                         |                                                                |
| <b>full-load current (FLA) for 3-phase AC motor</b>                           |                                                                |
| • at 480 V rated value                                                        | 80 A                                                           |
| • at 600 V rated value                                                        | 80 A                                                           |
| <b>contact rating of auxiliary contacts according to UL</b>                   | B600 / R300                                                    |
| <b>Short-circuit protection</b>                                               |                                                                |
| <b>design of the fuse link</b>                                                |                                                                |
| • for short-circuit protection of the main circuit                            |                                                                |
| — with type of coordination 1 required                                        | gG: 250 A, RK5: 300 A                                          |
| — with type of assignment 2 required                                          | gG: 250 A                                                      |
| • for short-circuit protection of the auxiliary switch required               | fuse gG: 6 A                                                   |
| <b>Installation/ mounting/ dimensions</b>                                     |                                                                |
| <b>mounting position</b>                                                      | any                                                            |
| <b>fastening method</b>                                                       | Contacteur mounting                                            |
| <b>height</b>                                                                 | 99 mm                                                          |
| <b>width</b>                                                                  | 55 mm                                                          |
| <b>depth</b>                                                                  | 104 mm                                                         |
| <b>Connections/ Terminals</b>                                                 |                                                                |
| <b>product component removable terminal for auxiliary and control circuit</b> | Yes                                                            |
| <b>type of electrical connection</b>                                          |                                                                |
| • for main current circuit                                                    | screw-type terminals                                           |
| • for auxiliary and control circuit                                           | screw-type terminals                                           |
| <b>arrangement of electrical connectors for main current circuit</b>          | Top and bottom                                                 |
| type of connectable conductor cross-sections for main contacts                |                                                                |
| • solid                                                                       | 1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> ) |
| • stranded                                                                    | 2x (10 ... 35 mm <sup>2</sup> ), 1x 50 mm <sup>2</sup>         |
| • solid or stranded                                                           | 1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> ) |
| • finely stranded with core end processing                                    | 1x (1 ... 35 mm <sup>2</sup> ), 2x (1 ... 25 mm <sup>2</sup> ) |
| <b>type of connectable conductor cross-sections</b>                           |                                                                |
| • for auxiliary contacts                                                      |                                                                |

|                                                     |                                                                      |
|-----------------------------------------------------|----------------------------------------------------------------------|
| — solid                                             | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )   |
| — solid or stranded                                 | 1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )   |
| — finely stranded with core end processing          | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| • for AWG cables for auxiliary contacts             | 1x (20 ... 14), 2x (20 ... 14)                                       |
| <b>tightening torque</b>                            |                                                                      |
| • for main contacts with screw-type terminals       | 3 ... 4.5 N·m                                                        |
| • for auxiliary contacts with screw-type terminals  | 0.8 ... 1.2 N·m                                                      |
| <b>design of screwdriver shaft</b>                  | Diameter 5 to 6 mm                                                   |
| <b>size of the screwdriver tip</b>                  | Pozidriv PZ 2                                                        |
| <b>design of the thread of the connection screw</b> |                                                                      |
| • for main contacts                                 | M6                                                                   |
| • of the auxiliary and control contacts             | M3                                                                   |

|                                                                |                                                  |
|----------------------------------------------------------------|--------------------------------------------------|
| <b>Electrical Safety</b>                                       |                                                  |
| <b>protection class IP on the front according to IEC 60529</b> | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

|                                                            |    |
|------------------------------------------------------------|----|
| <b>Communication/ Protocol</b>                             |    |
| <b>type of voltage supply via input/output link master</b> | No |

|                                                               |                                                                             |
|---------------------------------------------------------------|-----------------------------------------------------------------------------|
| <b>Electromagnetic compatibility</b>                          |                                                                             |
| <b>conducted interference</b>                                 |                                                                             |
| • due to burst according to IEC 61000-4-4                     | 2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 |
| • due to conductor-earth surge according to IEC 61000-4-5     | 2 kV (line to earth) corresponds to degree of severity 3                    |
| • due to conductor-conductor surge according to IEC 61000-4-5 | 1 kV (line to line) corresponds to degree of severity 3                     |
| • due to high-frequency radiation according to IEC 61000-4-6  | 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz       |
| <b>field-based interference according to IEC 61000-4-3</b>    | 10 V/m                                                                      |
| <b>electrostatic discharge according to IEC 61000-4-2</b>     | 6 kV contact discharge / 8 kV air discharge                                 |

|                                      |              |
|--------------------------------------|--------------|
| <b>Display</b>                       |              |
| display version for switching status | Slide switch |

|                                 |  |
|---------------------------------|--|
| <b>Approvals Certificates</b>   |  |
| <b>General Product Approval</b> |  |



[Confirmation](#)



|            |                                       |                          |                          |
|------------|---------------------------------------|--------------------------|--------------------------|
| <b>EMV</b> | <b>For use in hazardous locations</b> | <b>Test Certificates</b> | <b>Marine / Shipping</b> |
|------------|---------------------------------------|--------------------------|--------------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



|                          |              |                    |
|--------------------------|--------------|--------------------|
| <b>Marine / Shipping</b> | <b>other</b> | <b>Environment</b> |
|--------------------------|--------------|--------------------|



[Confirmation](#)

[Environmental Confirmations](#)

|                            |
|----------------------------|
| <b>Further information</b> |
|----------------------------|

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3036-1WB0>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3036-1WB0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-1WB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB3036-1WB0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3036-1WB0&lang=en)


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-1WB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3036-1WB0&objecttype=14&gridview=view1>

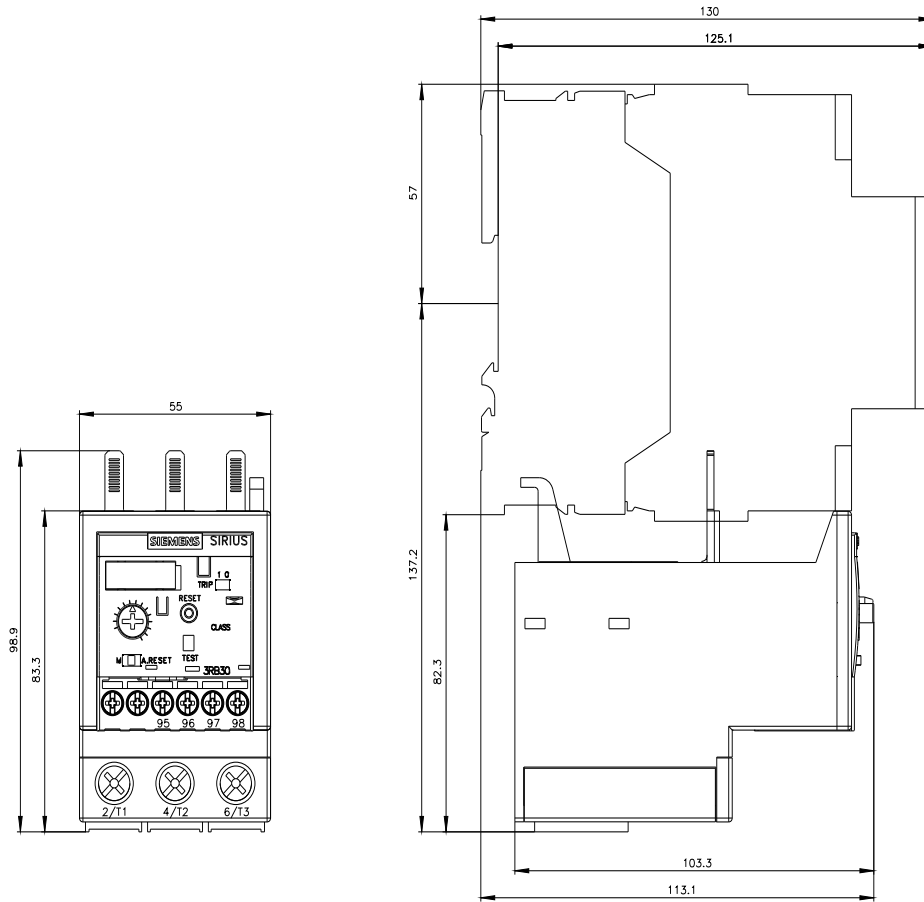

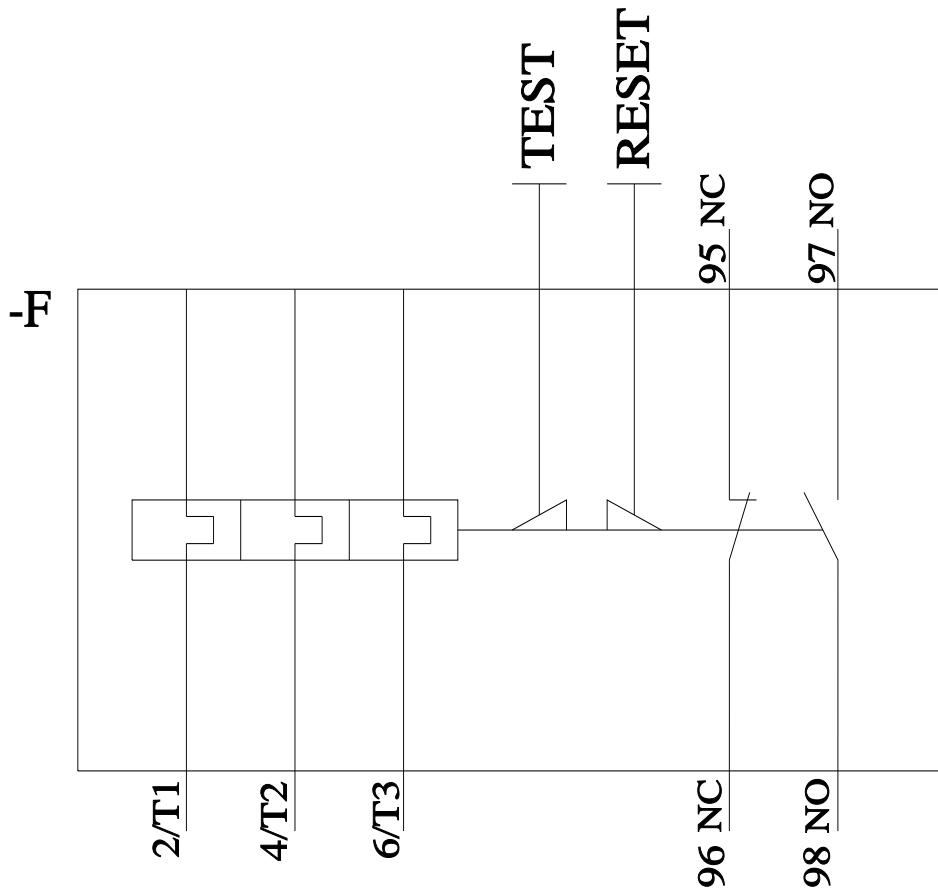

last modified:

3/11/2024