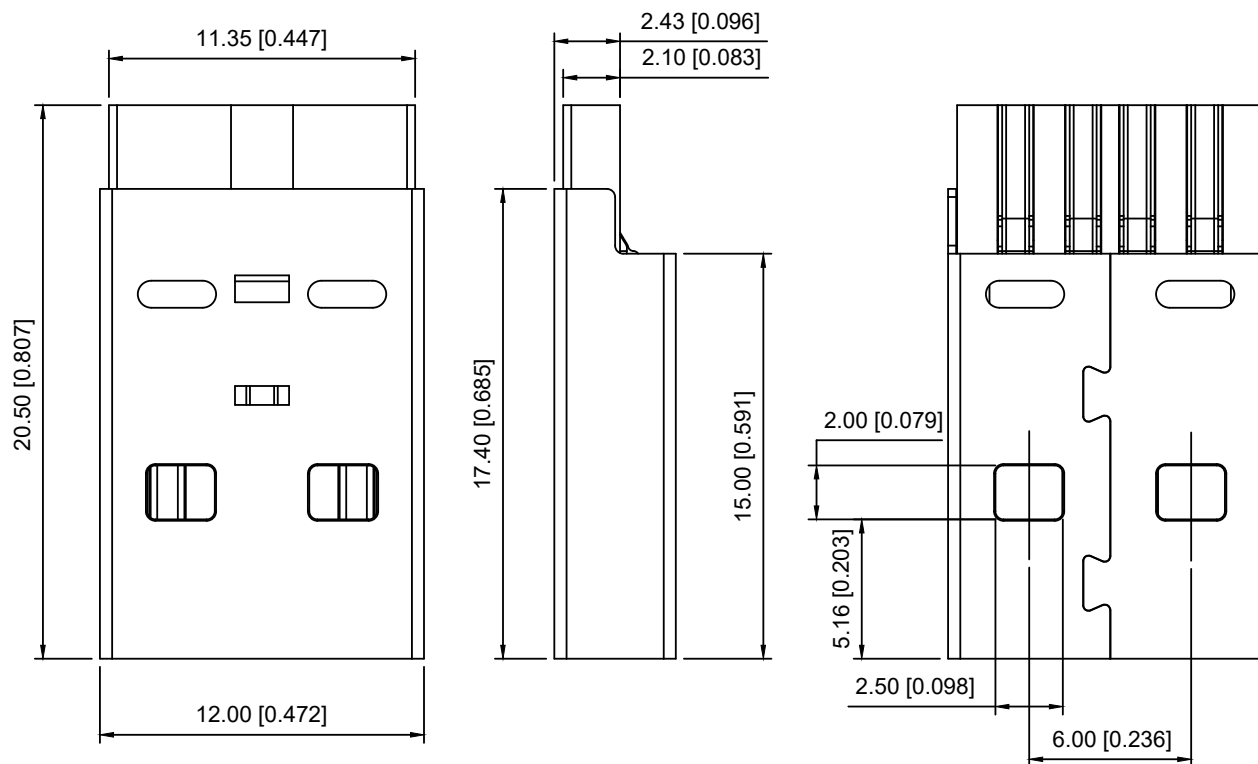


U216-041N-1BS82-1

1: Au 1U"
6: Au 30U"

1: SPCC 5: BRASS

B: Black W: White

1: PBT
2: PA6T
3: PA9T
4: LCP

NOTE 备注:

1. MATERIAL 材质:

1.1. HOUSING 胶壳: PBT BLACK

1.2. TERMINAL 端子: H62 T=0.18mm

PLATING 电镀: GF Au AND Tin 100u"MIN

1.3. SHELL 外壳: SPCC T=0.30mm

PLATING 电镀: Ni 100u" MIN

2. ELECTRICAL (电气特性):

2.1. THE VOLTAGE & CURRENT RATE (额定电压和电流):
30V AC, 2.0-3.0A MAX;2.2. WITHSTANDING VOLTAGE (耐压强度):
250V AC / 1 minute 漏电流 0.5mA Max;2.3. CONTACT RESISTANCE (导通阻抗):
30mΩ ohms Max AT 100mA;2.4. INSULATION RESISTANCE (绝缘阻抗):
100M ohms Min AT 20°C;

3. MECHANICAL (物理特性):

3.1. MATING FORCE (插入力): 3.50kgf MAX;

3.2. UNMATING FORCE (拔出力): 1.00kgf Min;

3.3. LIFE TEST (寿命测试): 5000cyc les min;
200cyc les/hour;

4. SALT SPRAY TEST TIME: 48H

5. 符合 RoHS, REACH

									DSND		SCALE: N/A	MODEL TYPE: USB 2.0			
					ANGULAR	±5°		DWN		VIEW: 	PART NO.: U216-041N-1BS82-1				
ΔX					L≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.: U216-041N-1BS82-1				
ΔX					4<L≤ 16	±0.3		APPD		SIZE: A4					
ΔX					16<L≤ 63	±0.4									
MARK	DESCRIPTION			DATE	REVISED	APPROVED	L> 63	±0.5							
REVISIONS							UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn														1/1	A0