


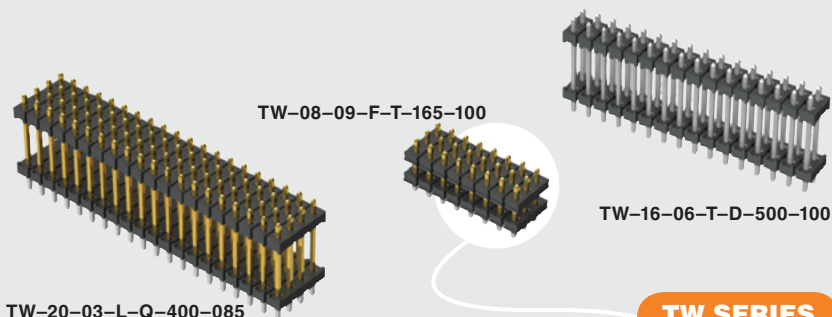

TW SERIES

THROUGH-HOLE BOARD STACKERS

- Choice of one through six rows

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	TAIL SPEC
02 thru 50		Specify LEAD STYLE from chart below.	—F = Gold flash on post, Matte Tin on tail —L = 10 µ" (0.25 µm) Gold on post, Matte Tin on tail —T = Matte Tin	—S = Single Row —D = Double Row —T = Triple Row —Q = Four Row —5 = Five Row —6 = Six Row	—“XXX” = Stacker Height in inches (0.13 mm) .005 increments Example: —250 = (6.35 mm) .250"	—“XXX” = Tail Length in inches (0.13 mm) .005 increments Example: —150 = (3.81 mm) .150" —“XXX” = Polarized Position (Specify position to be removed)

LEAD STYLE	OAL
—01	(8.20) .323
—02	(9.60) .377
—03	(13.60) .535
—04	(14.10) .555
—05	(15.10) .594
—06	(17.10) .673
—07	(19.10) .751
* —08	(21.10) .830
* —09	(11.60) .456
—10	(15.60) .614
—11	(10.08) .397
* —12	(28.19) 1.110

* Style —08 & —12 = S & D only

ROW OPTION	STACKER HEIGHT
—S, —D*, & —Q	(3.05) .120 MIN
—T, —5, —6	(4.06) .160 MIN

* —D with stacker height greater than (4.06 mm) .160" will not have standoffs.

Downloaded from Arrow.com.