

1

2

3

4

5

6

7

8

9

10

RoHS

12.00

12.02


15.00

20.00

7.98

7.10

4.50

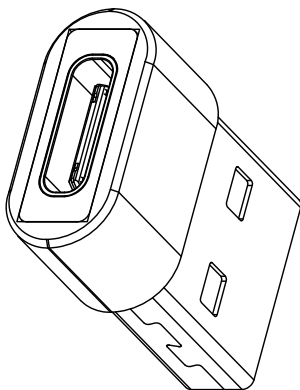

MAPX

MODIFICATION

DRW

DATE

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C

7	SHELL	塑料 (聚碳酸酯)	BLACK (可订制)	1PCS
6	SHELL	SPQC	NI Plated	1PCS
5	CONTACT	PCB (镀锡铜电阻)	Au20"	1SET
4	HOUSING	PBT	BLACK	1PCS
3	SHELL	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X	±0.25	X	±5°	单位	MM	制图	YANG	制料号	917-B88C201AH70205
X	±0.20	X	±2°	比例	1:1	审核	郭治富	产品名称	转接头
XX	±0.05	XX	±1°	日期	2020-05-22	核准	黄国荣	角法	转接头
XXX	±0.02	XXX	±0.5°	DATE	2020-05-22	APPD		VER	AD

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.