




Part Number : [349610388](#)
Product Description : Mini50 Unsealed Right-Angle Header, UL 94 HB, 38 Circuits, Polarization C, Dark Gray, Tray
Series Number : [34961](#)
Status : Active
Product Category : [PCB Headers and Receptacles](#)

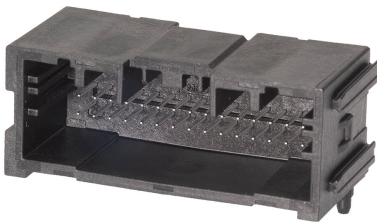

Documents & Resources

Drawings

[Drawing 349610388_sd.pdf](#)
[Packaging Design Drawing PK-31302-070-001.pdf](#)

3D Models and Design Files

[3D Model 349610388_stp.zip](#)

Specifications

[Test Summary TS-34961-001-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	Not Relevant
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D

- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	34961
Description	Mini50 Unsealed Right-Angle Header, UL 94 HB, 38 Circuits, Polarization C, Dark Gray, Tray
Application	Automotive, Power, Signal, Wire-to-Board
Comments	38 x 0.50mm blades = 4.0A
Component Type	PCB Header
Product Family	Mini50 Connection Systems
Product Name	Mini50
UPC	195842848085

Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V DC

Physical

Breakaway	No
Circuits (Loaded)	38
Circuits (maximum)	38
Color - Resin	Gray (Dark)
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes

Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	SPS
Net Weight	6.300/g
Number of Rows	3
Orientation	Right Angle
Packaging Type	Tray
PC Tail Length	2.75mm
PCB Locator	Yes
PCB Retention	None
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole

Mates With / Use With

Mates with Part(s)

Description	Part Number
Mini50 Unsealed Receptacle, 3 Rows, without CPA, 38 Circuits, Polarization Option C, Dark Gray	<u>349590392</u>
Mini50 Unsealed Receptacle, 3 Rows, with CPA, 38 Circuits, Polarization Option C, Dark Gray	<u>349590385</u>