


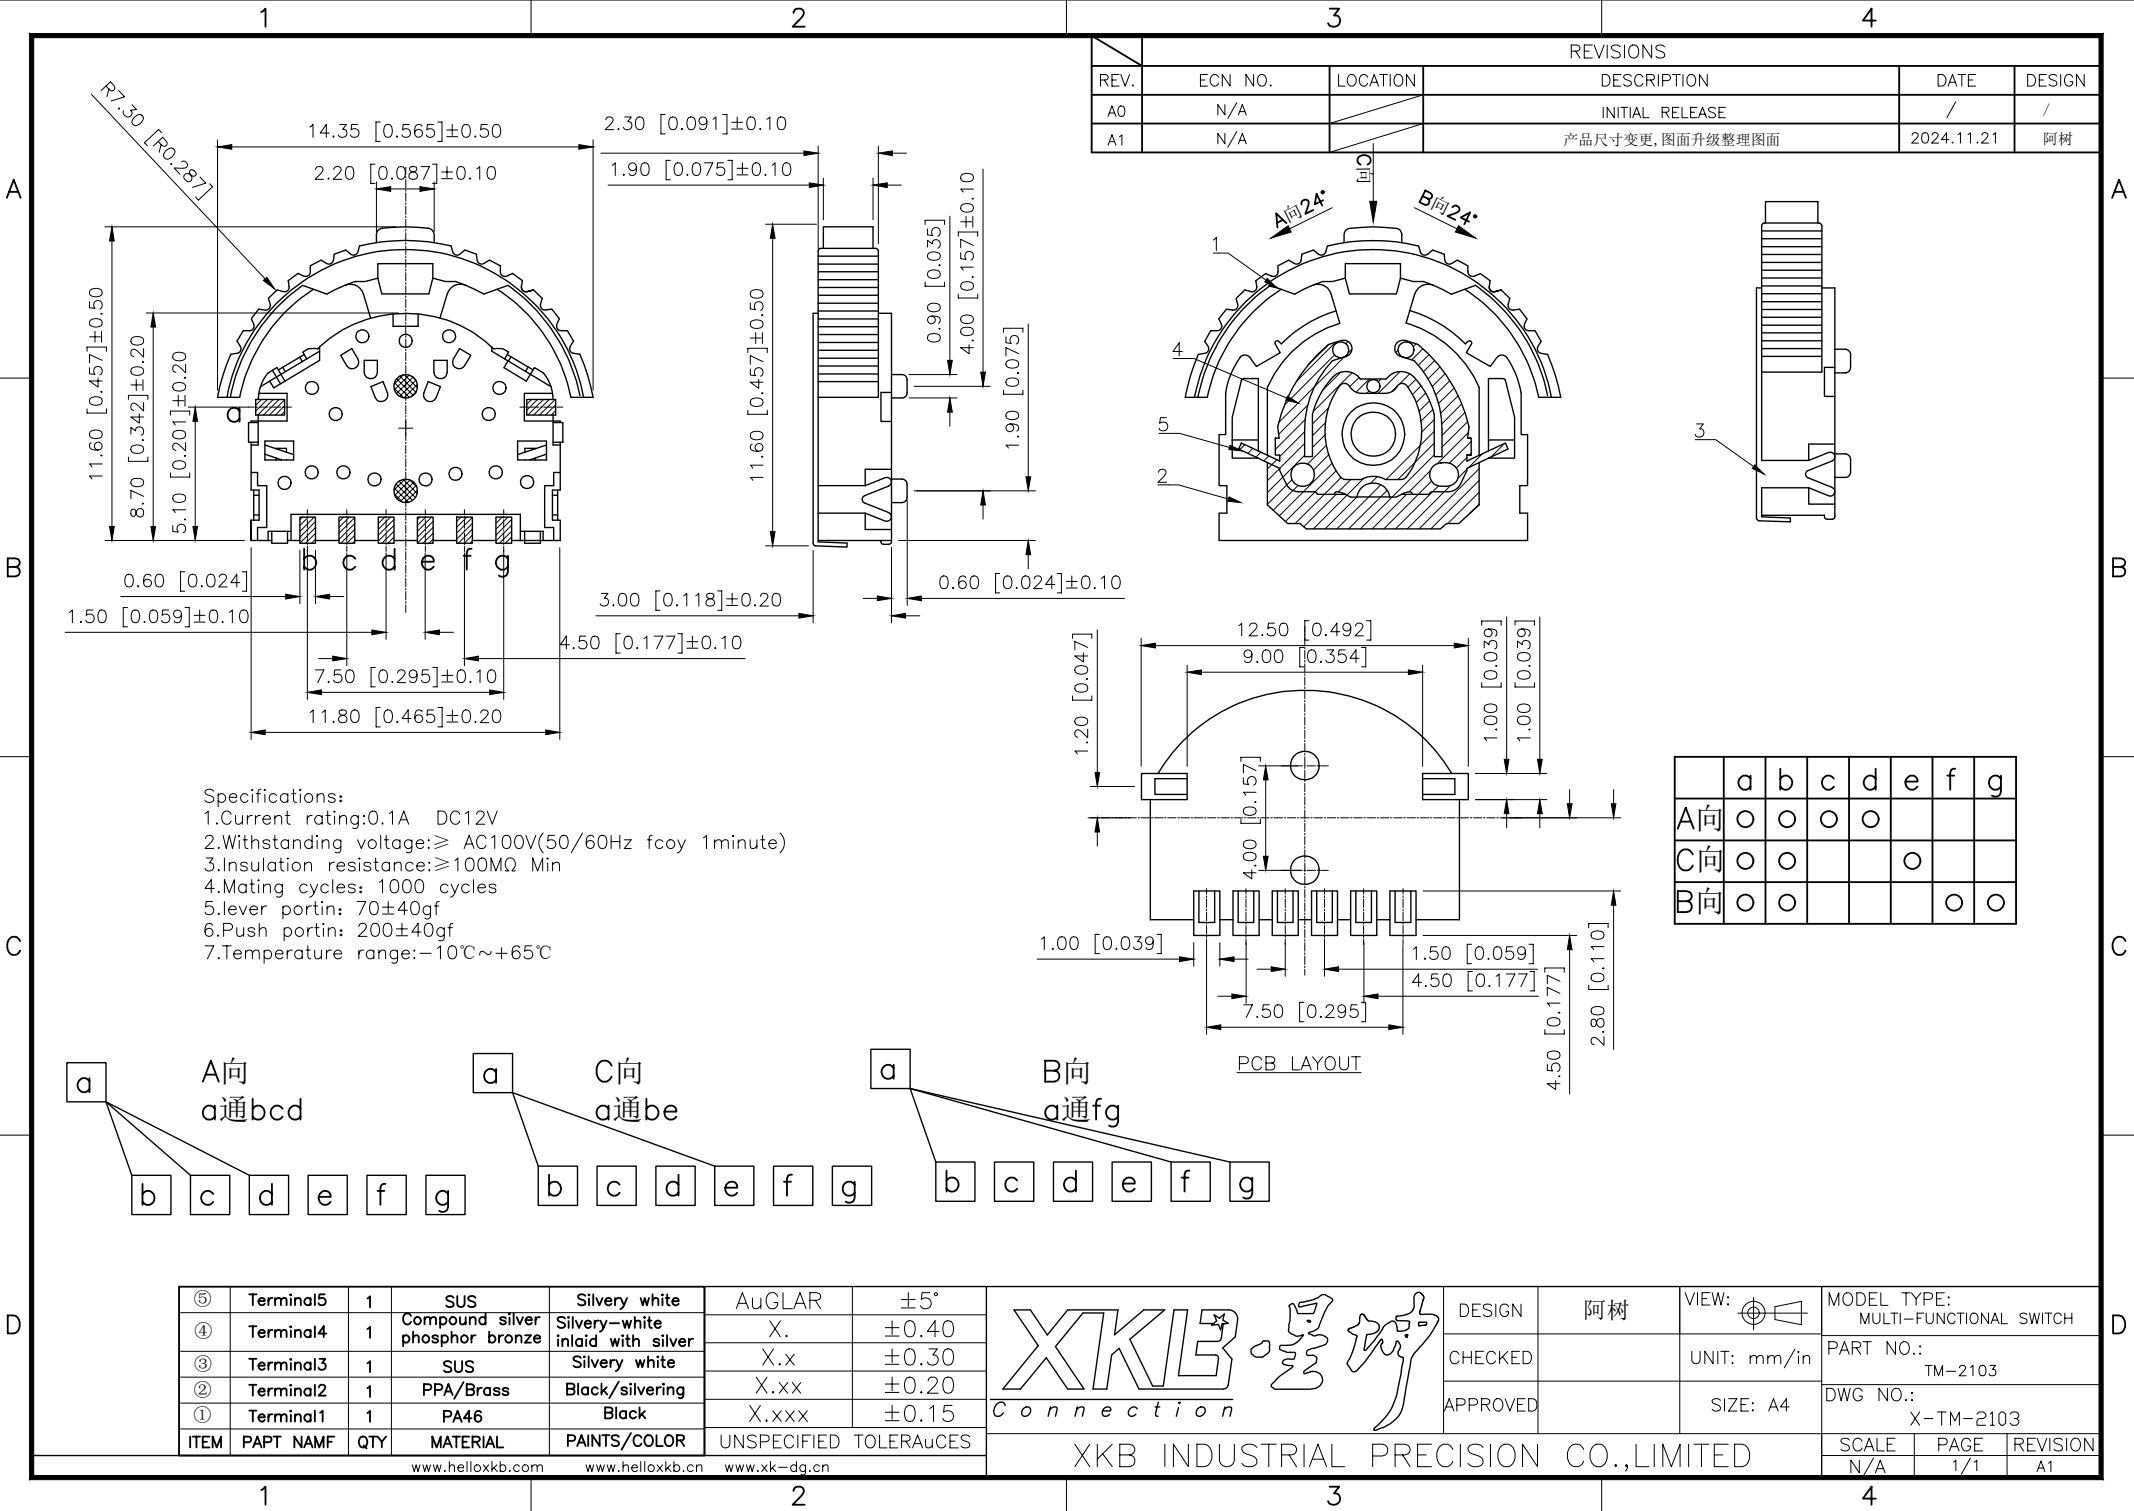

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		产品尺寸变更, 图面升级整理图面	2024.11.21	阿树

- Specifications:
- Current rating:0.1A DC12V
 - Withstanding voltage:≥ AC100V(50/60Hz fcoy 1minute)
 - Insulation resistance:≥100MΩ Min
 - Mating cycles: 1000 cycles
 - lever portin: 70±40gf
 - Push portin: 200±40gf
 - Temperature range:-10℃~+65℃

	a	b	c	d	e	f	g
A向	○	○	○	○			
C向	○	○			○		
B向	○	○				○	○

PCB LAYOUT

⑤	Terminal5	1	SUS	Silvery white	AuGLAR	±5°
④	Terminal4	1	Compound silver phosphor bronze	Silvery-white inlaid with silver	X.	±0.40
③	Terminal3	1	SUS	Silvery white	X.x	±0.30
②	Terminal2	1	PPA/Brass	Black/silvering	X.xx	±0.20
①	Terminal1	1	PA46	Black	X.xxx	±0.15
ITEM	PAPT NAMF	QTY	MATERIAL	PAINTS/COLOR	UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: MULTI-FUNCTIONAL SWITCH
CHECKED		UNIT: mm/in	PART NO.: TM-2103
APPROVED		SIZE: A4	DWG NO.: X-TM-2103

XKB INDUSTRIAL PRECISION CO.,LIMITED			SCALE N/A	PAGE 1/1	REVISION A1
--------------------------------------	--	--	--------------	-------------	----------------