


Electrical test:
 1.100% short/open,rms/wire test
 2.Conduct resistance:5 Ohm(max)
 3.insulation resistance:10Mohm(min)
 4.dielectric test:DC 300V

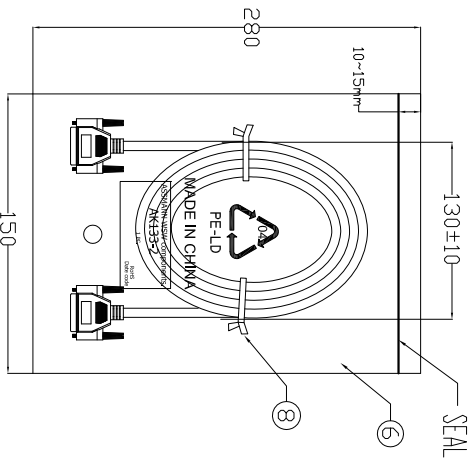

⑧	TIE	2	WHITE L=80mm
⑦	PE BAG	1/10	CLEAR SIZE:360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE:150*280*0.05mm PRINT BLACK"MADE IN CHINA"
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM
④	SCREW	4	#4-40UNC TYPE L=30mm,NICKEL PLATED,MOLD:BEIGE(V-29) ABS
③	IN JACKET	18g	CLEAR LD-PE (Mould NO.:NM-33)
②	OUT JACKET	60g	BEIGE(V-29) 40P PVC(Mould NO:WM-071)
①	CABLE	1	NOUL 28#*25C+D+AL/MY 0D6.5mm JACKET BEIGE(V-29) L=2000±10MM

① PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
SHELL	SHELL

RoHS compliant
 Unit: mm

Scale	Free				
TOLERANCE					
DIM	TOL				
Angle	TOL				
		①	Delete the wire color for pin assignment	04.09.2017	Fred
		②	Drawn	20.02.2017	Amy
			Modification		

Customer-No.			
ASSMANN WSW-No.			
AK1333-2			
Drawing-No.			
ASS 7854 CA			
Replace			
rev01			
Sheet			



1	2	3	4	5	6	7
H	G	F	E	D	C	B