


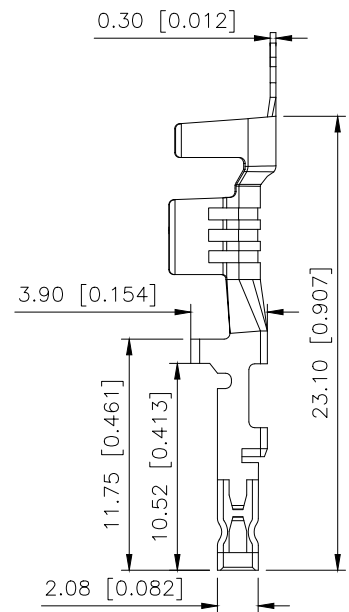




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图框升级整理图面	2025.12.20	阿树

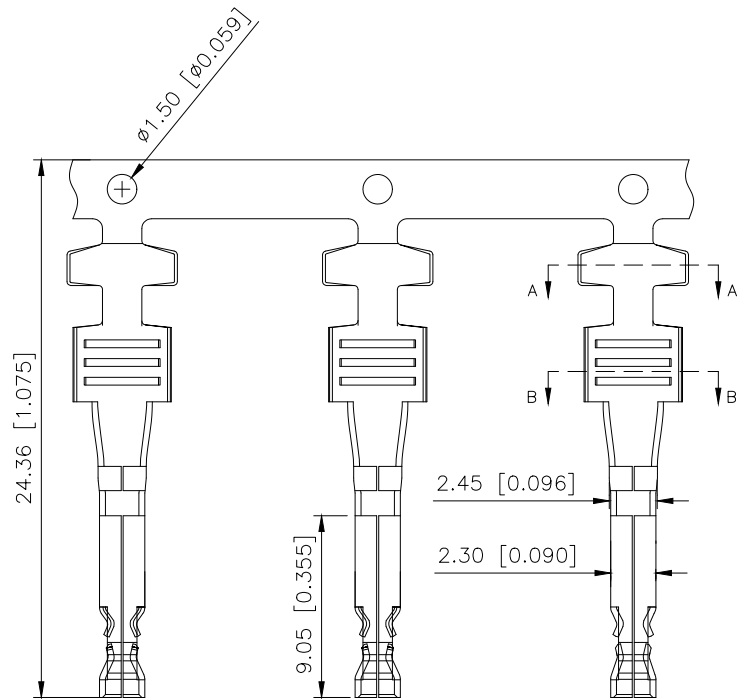


Specifications:
规格:
Voltage rating:600V AC/DC
额定电压: 600V AC/DC
Current rating:23A AC/DC
额定电流: 23A AC/DC
Withstanding voltage:2200V AC/minute
耐受电压: 2200V AC/分钟
Temperature range: -40℃-+105℃
温度范围: -40℃-+105℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:10mΩ Max
接触电阻: 10mΩ Max

X5701 T-B SN-M
① ② ③ ④ ⑤

- 1.Series No
- 2.Category:T-Terminal
- 3.Material:B-Brass
- 4.Plating:SN-Bright Tin Plated 50-80u'
- 5.Category: X-H:High Leads
X-M:Low Leads



低脚14 - 16AWG



X5701T-BSN-H	AWG#12	0.162''(4.11mm)
	AWG#14	0.148''(3.75mm)
X5701-T-BSN-M	AWG#16	0.125''(3.18mm)
	AWG	Max.Ins.Dia
PART NO		Wire size

X5701T-BSN-M	Brass	X5701W	X5701H
PART NO	Material	Suitable XKB Wafer	Suitable XKB Housing
DESIGN	阿树	VIEW:	MODEL TYPE: 5.7mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X5701T-BSN-M
APPROVED		SIZE: A4	DWG NO.:

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1