

1




2

3

4



| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.06.06 | 阿树     |

A

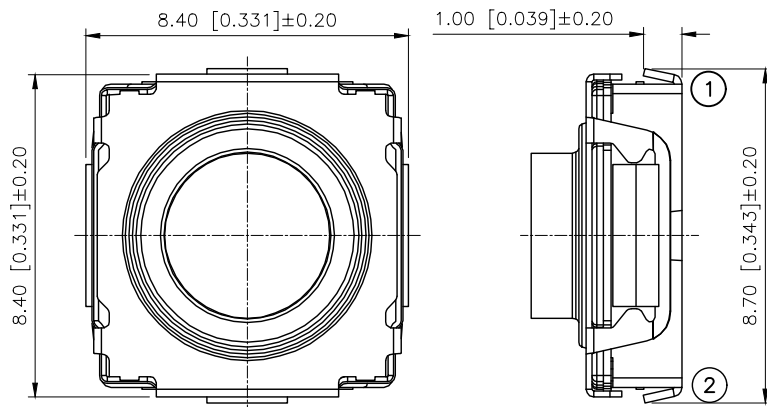

Specifications:  
Voltage rating: 16 V AC / DC  
Current rating: 50mA AC / DC  
Withstanding voltage: 250V AC/minute  
Temperature range: -40°C~+90°C  
Insulation resistance: 1000MΩ Min  
Operating force: 1000gf+300gf  
Life: 200,000cycles  
Protection grade: IP54  
Stroke: 0.90mm+0.30mm

B

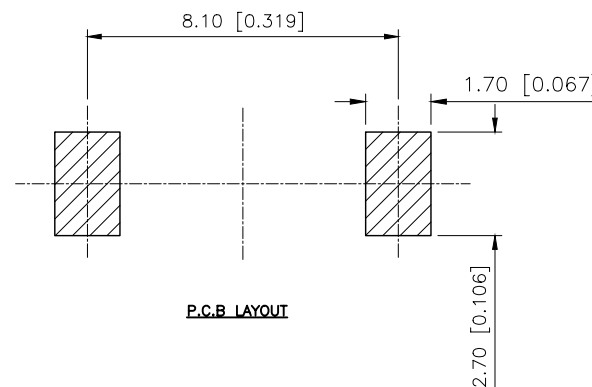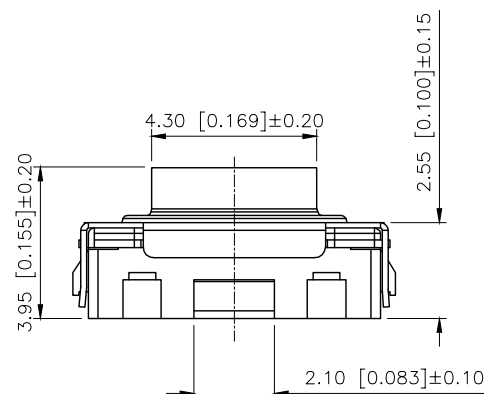


P.C.B. LAYOUT

TS-8484 -E -G

E:400gf±80gf  
H:700gf±200gf  
K:1000gf±300gf

G:Green  
Y:Yellow  
BL:Blue



CIRCUIT DIAGRAM

D

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |       |       |             |               |
|----------|----|-------|-------|-------------|---------------|
| DESIGN   | 阿树 | VIEW: |       | MODEL TYPE: | TACT SWITCH   |
| CHECKED  |    | UNIT: | mm/in | PART NO.:   | TS-8484 -E -G |
| APPROVED |    | SIZE: | A4    | DWG NO.:    | TS-8484 -E -G |
|          |    |       | SCALE | PAGE        | REVISION      |
|          |    |       | N/A   | 1/1         |               |

1

2

3

4