

[illegible]


ECN / DESCRIPTION	BY	DATE

	BY	DATE

	DATE


1

RECOMMENDED PANEL CUTOUT (REFERENCE ONLY) :

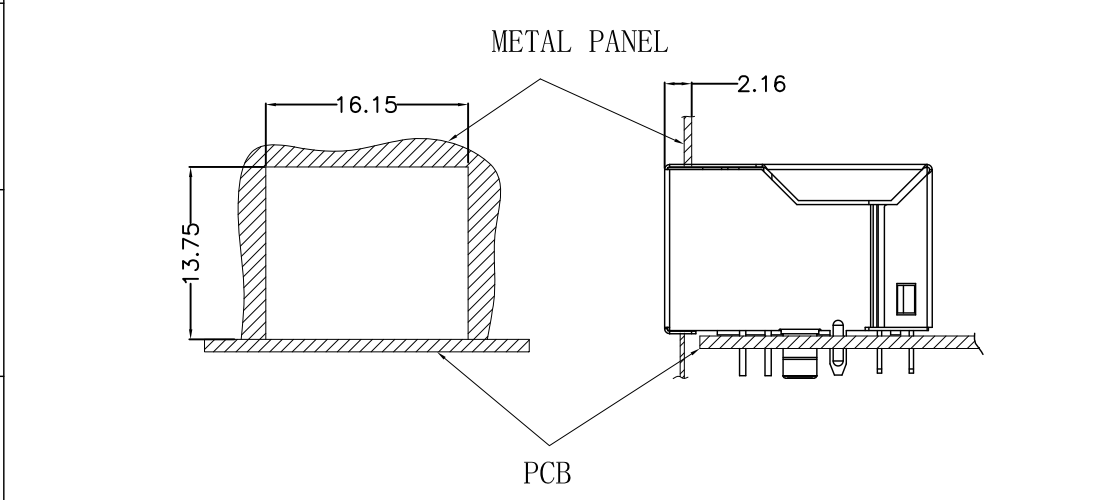

UNIT: MM / INCH
TOLERANCES: ± 0.10 / 0.004
REFERENCE ONLY

KEEP-OUT AREA (COMPONENT SIDE VIEW) :

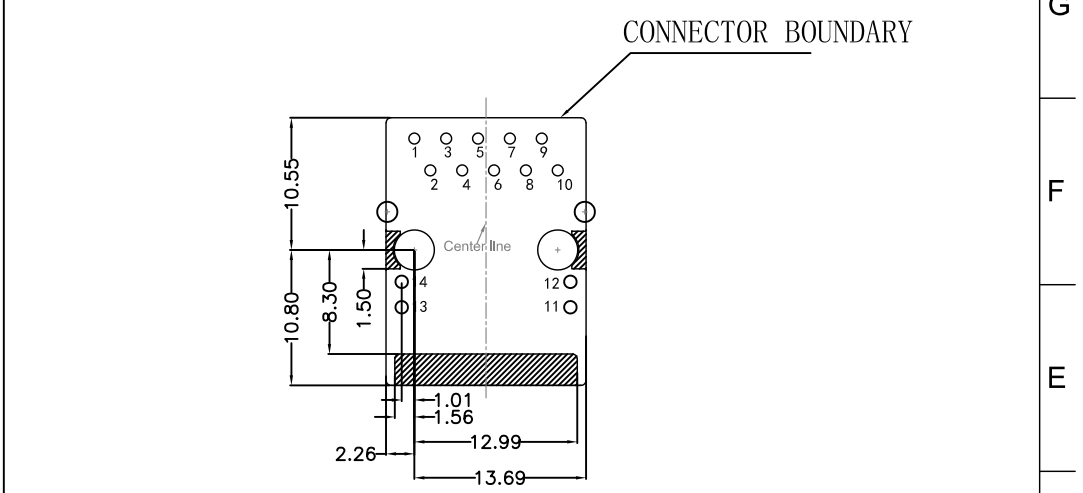

PLUG-IN SIDE	D
--------------	---

UNIT: MM / INCH	C
TOLERANCES: ± 0.10 / 0.004	

TITLE:
<pre> TAB=IP 1X1 1000BASE </pre>

PART NO.:	RT-2110776CG1A4D
-----------	------------------

REMARK:

SIZE	UNITS
A4	MM[INCH]

SHEET
2/4

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES UNLESS SPECIFIED	
± 0.35	$\pm 3.0^\circ$
± 0.30	$\pm 2.0^\circ$
± 0.25	$\pm 1.5^\circ$
± 0.10	$\pm 1.0^\circ$

	.xx±0.25
	.xxx±0.1

6


TOLERANCES SPECIFIED	APPROVED BY:
-------------------------	--------------

.xx°±1.5°	DESIGND BY:
.xxx°±1.0°	

A horizontal number line with vertical tick marks at every integer from 0 to 8. The numbers 7 and 8 are printed below their respective tick marks.

深圳市富港科技有限公司


8

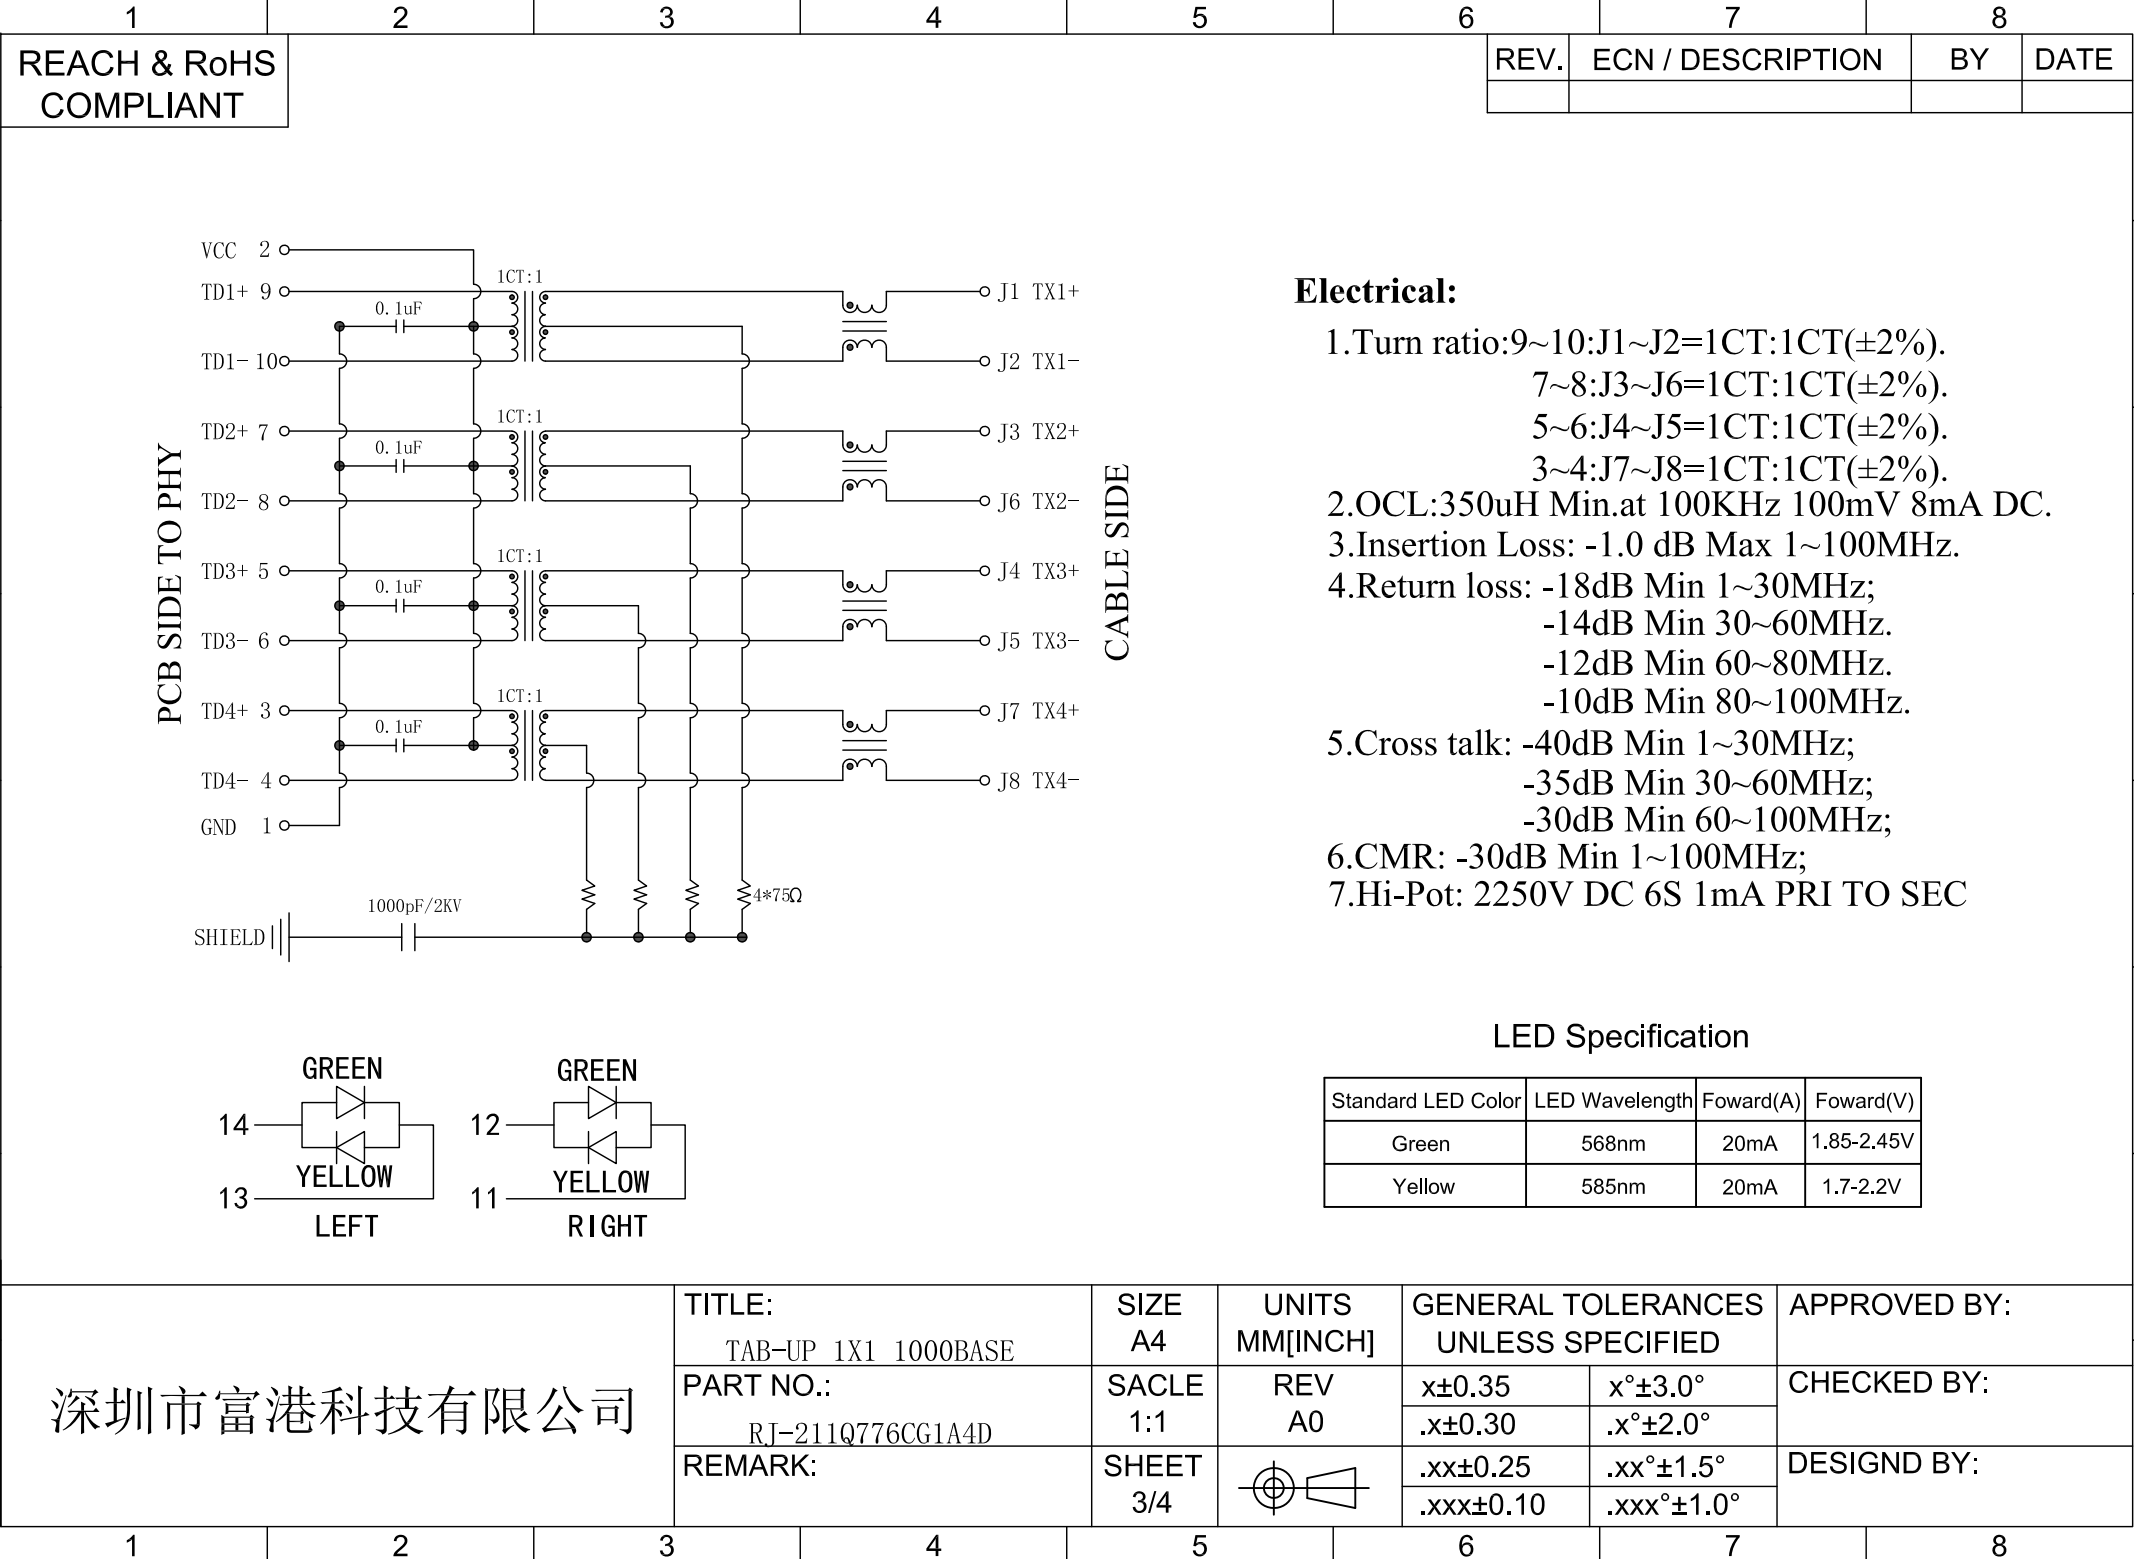

PROFILE OF WAVE SOLDER

REACH & RoHS
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	ZG.Hu	2018.01.22

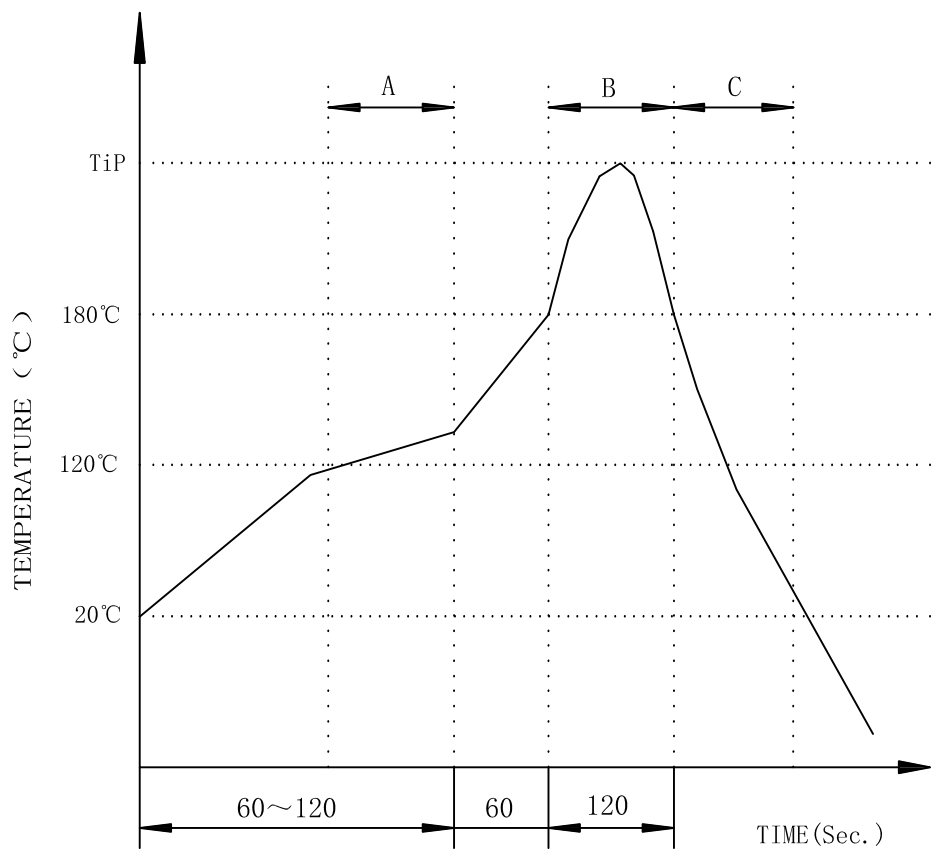

A.Preheating B.Soldering C.Gradual Cooling
Tip temperature:260±5°C.
Tip temperature time:5Sec Max.
Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic positioning columns of the product which under the PCB will be slightly melted, but it won't affect its function.

A	深圳市富港科技有限公司	TITLE: TAB-UP 1X1 1000BASE	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY:
		PART NO.: RJ-211Q776CG1A4D	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY:
		REMARK:	SHEET 4/4		.xx±0.30	.x°±2.0°	DESIGND BY:
					.xxx±0.10	.xxx°±1.0°	