

FEATURES

- Low Forward Voltage Drop
- Very Small SMD Package

APPLICATIONS

- Low Voltage Rectification
- High Efficiency DC/DC Conversion
- Switch Mode Power Supply
- Inverse Polarity Protection
- Low Power Consumption Applications

DFN1006-2L



MARKING: 4A

ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$ unless otherwise specified)




Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	$V_{(BR)}$	$I_R=1\text{mA}$	40			V
Reverse current	I_R	$V_R=40\text{V}$		10	40	μA
Forward voltage	V_F	$I_F=0.1\text{A}$		0.33	0.38	V
		$I_F=0.2\text{A}$		0.37	0.40	
		$I_F=0.5\text{A}$		0.45	0.49	
		$I_F=0.7\text{A}$		0.50	0.55	
		$I_F=1\text{A}$		0.57	0.61	
Total capacitance	C_{tot}	$V_R=10\text{V}, f=1\text{MHz}$		19		pF

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)


symbol	parameter	value	unit
V_{RRM}	peak Repetitive Reverse voltage	40	V
V_{RWM}	working peak Reverse voltage		
$V_{R(RMS)}$	RMS Reverse voltage	28	V
I_O	Average Rectified output current	1	A
I_{FSM}	Non-repetitive peak Forward surge current @ $t=8.3\text{ms}$	7	A
P_D	power Dissipation (Note 1)	500	mw
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient (Note 1)	250	$^{\circ}\text{C/W}$
T_j	Operating Junction Temperature Range	-40 ~ +125	$^{\circ}\text{C}$
T_{stg}	Storage Temperature Range	-55 ~ +150	$^{\circ}\text{C}$

Note: 1.The value of P_D & $R_{\theta JA}$ is measured with the device mounted on 1 in2 FR-4 board with 2oz. Copper, two sided, in a still air environment with $T_a=25^{\circ}\text{C}$.

Typical Characteristics

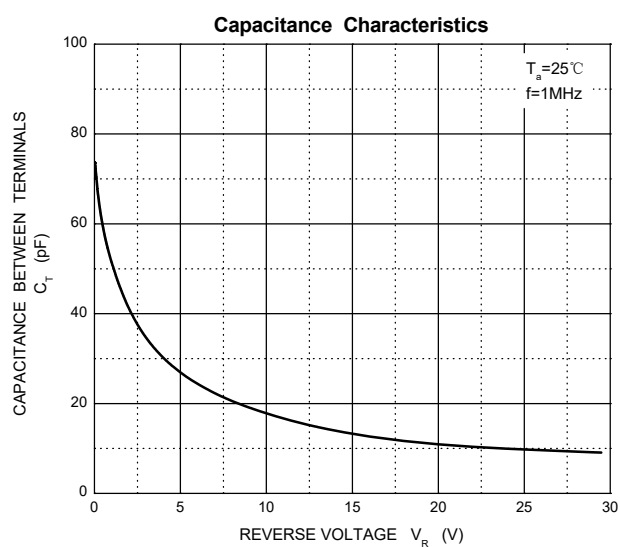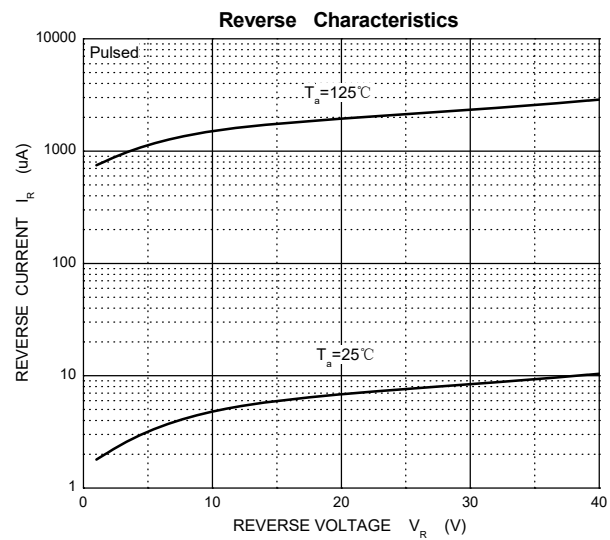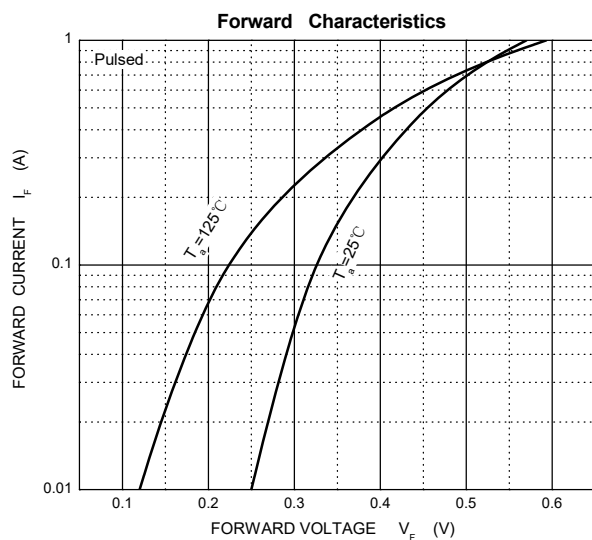


DFN1006-2L Package Outline Dimensions

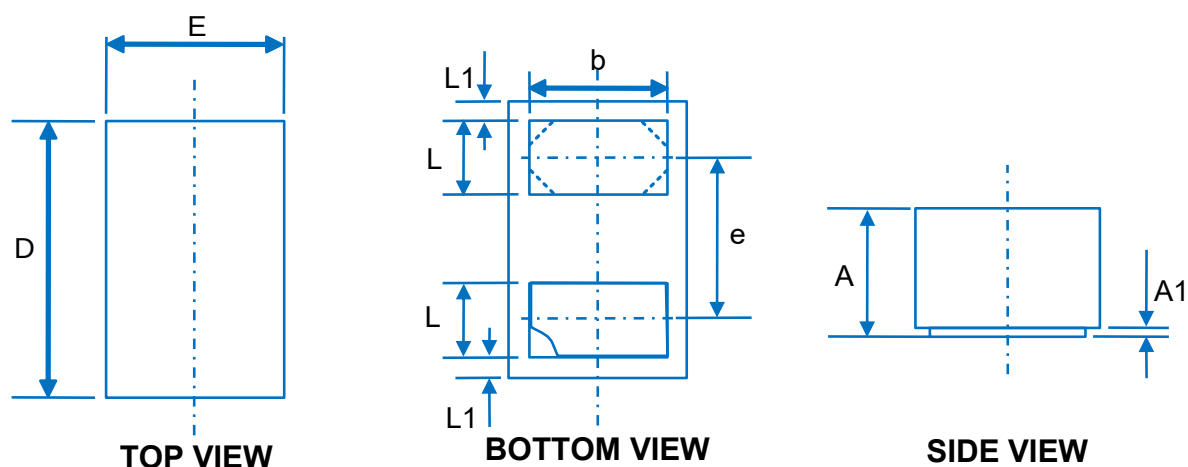

Symbol	Dimensions In Millimeters (mm)		
	Min.	Typ.	Max.
A	0.40	0.45	0.50
A1	0.00	0.03	0.05
D	0.95	1.00	1.08
E	0.55	0.60	0.68
b	0.40	0.50	0.60
e	-	0.65	-
L	0.20	0.25	0.30
L1	0.05 REF.		

DFN1006-2L Suggested Pad Layout

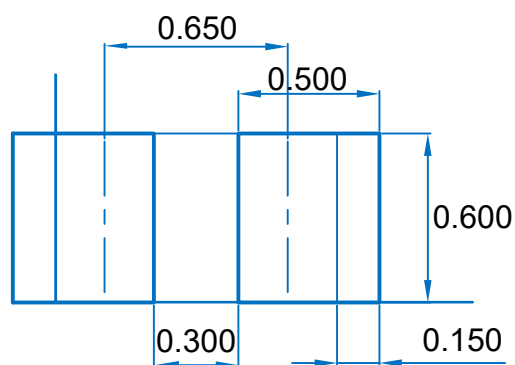

Note:
 1. Controlling dimension: In millimeters.
 2. General tolerance: ± 0.050 mm.
 3. The pad layout is for reference purposes only.

Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
TAPING	DFN1006-2L	4A	10000