

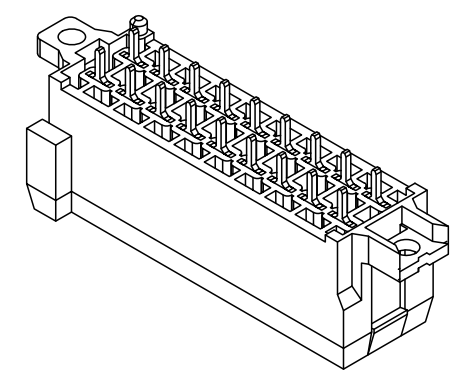
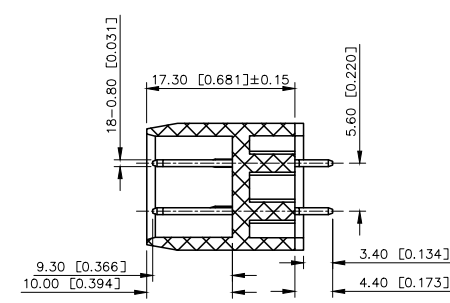
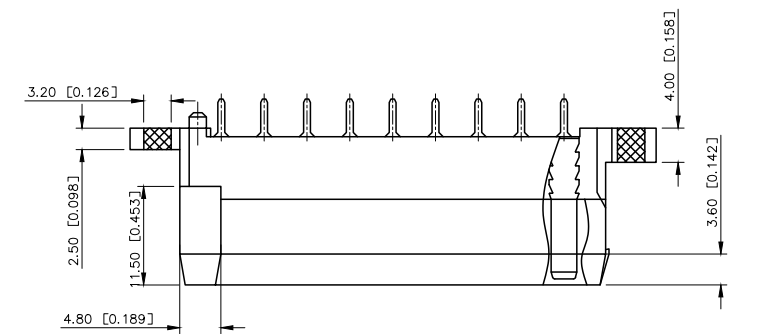
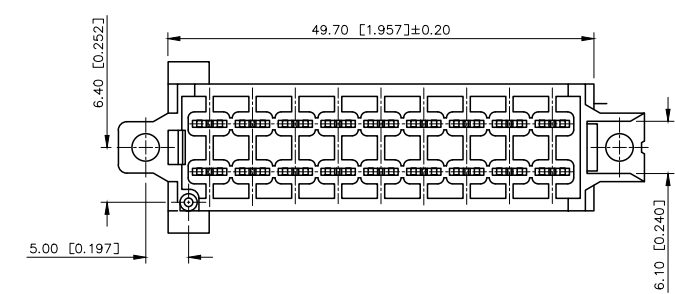


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	/
A1	N/A		图面升级整理图面	2025.06.14

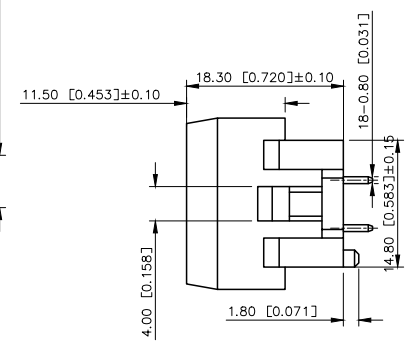



Current rating: 25A AC/DC
额定电流: 25A AC/DC
Temperature range: -40℃~+125℃
温度范围: -40℃~+125℃

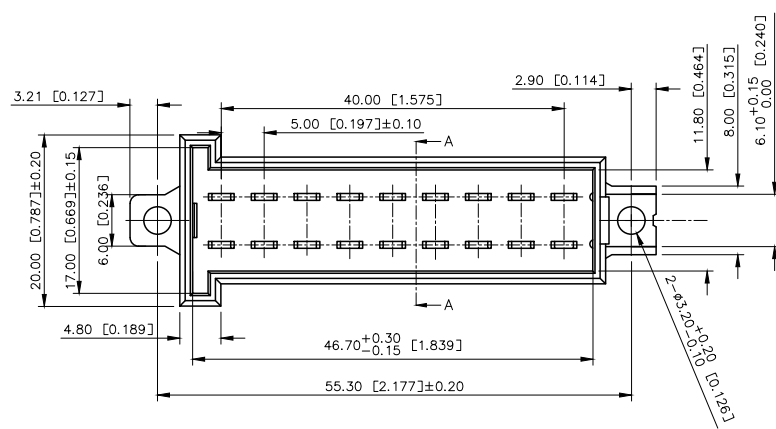

PART NO.:

K 828801 W V-2xXX-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①K: XKBTEK-Car Connector
- ②XKB Series No
- ③Category: W- Wafer
- ④Welding Board Range: V-Straight 180°
- ⑤Row No.Pin No: 2xXX-2x09Pin
- ⑥Material: PT-PBT
- ⑦Plating: SN-Plated Tin

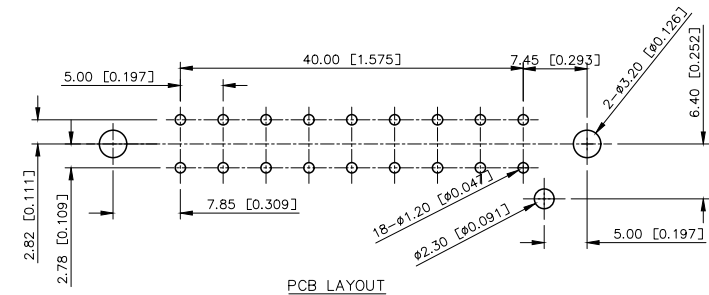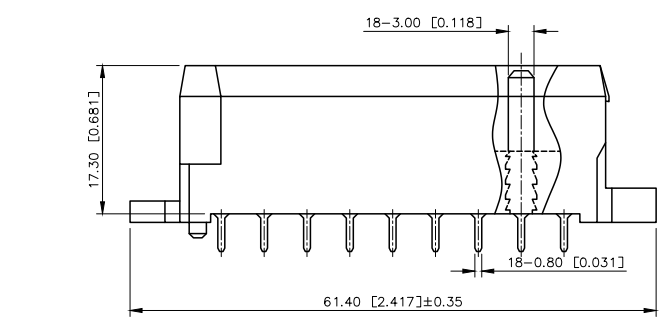

PCB LAYOUT

K828801WV-2xXX-PTSN	PBT	Brass	K828801H
PART NO	Material	Material (Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	5.00mm Automobile connector
CHECKED		UNIT:	mm /in	PART NO.:	K828801WV-2x09-PTSN
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1