
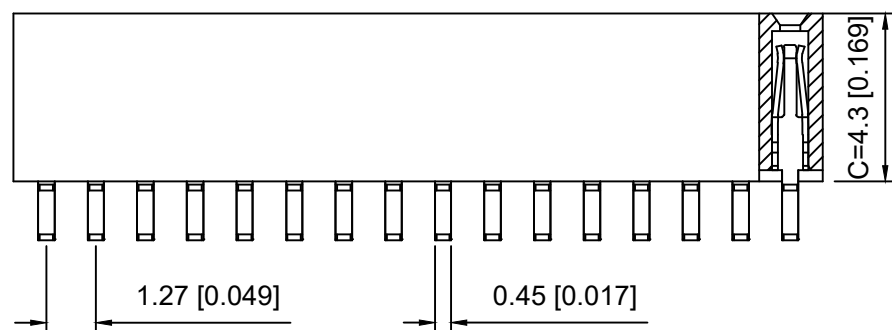
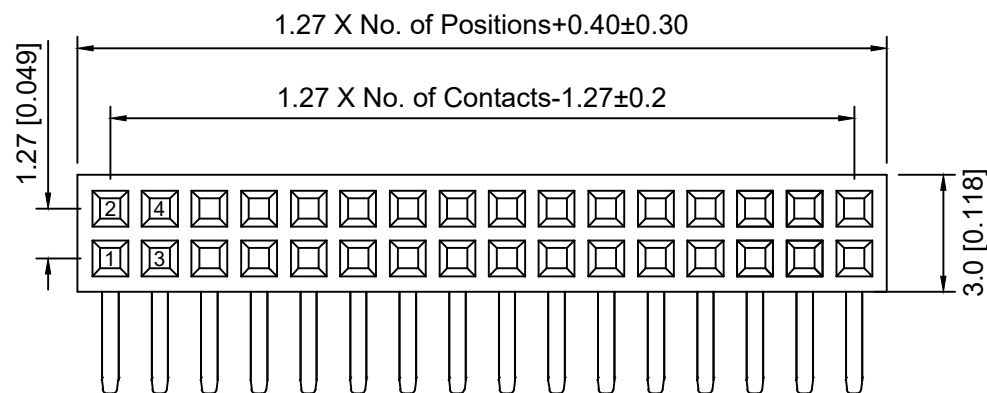


P.C.B LAYOUT



# Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:300V AC/minute

耐受电压: 300V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance:≥500MΩ

绝缘电阻: ≥500MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Wave soldering temperature:255±5℃, 10S

波峰焊温度: 255±5℃, 10S

X1321 F R - 2x40 - C43 D24  
① ② ③ ④ ⑤ ⑥

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:R-Straight 90°
- 4.Row No.Pin No:2xXX-2x01~2x40P
- 5.Plastic Height:C=4.3mm
- 6.Pin Length:D=2.4mm

|                     |          |               |                    |
|---------------------|----------|---------------|--------------------|
| X1321FR-2x40-C43D24 | PA6T     | Brass         | X1321W             |
| PART NO             | Material | Material(Pin) | Suitable XKB Wafer |

| MARK                                          | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|-----------------------------------------------|-------------|------|---------|----------|------------------------|
| ΔX                                            |             |      |         |          | ANGULAR ±5°            |
| ΔX                                            |             |      |         |          | L≤ 4 ±0.2              |
| ΔX                                            |             |      |         |          | 4<L≤ 16 ±0.3           |
| ΔX                                            |             |      |         |          | 16<L≤ 63 ±0.4          |
| ΔX                                            |             |      |         |          | L> 63 ±0.5             |
| REVISIONS                                     |             |      |         |          |                        |
| www.helloxkb.com www.helloxkb.cn www.xk-dg.cn |             |      |         |          |                        |

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

|      |             |                                |
|------|-------------|--------------------------------|
| DSND | SCALE: N/A  | MODEL TYPE:                    |
| DWN  | VIEW:       | 1.27mm BTB Connector           |
| CHKD | UNIT: mm/in | PART NO.: X1321FR-2x40-C43D24  |
| APPD | SIZE: A4    | DWG NO.: X-X1321FR-2x40-C43D24 |
|      |             | WEIGHT                         |
|      |             | SHEET 1/1                      |
|      |             | REVISION A0                    |