



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		修正线路板开孔图，图面升级整理图面	2025.2.21	阿树

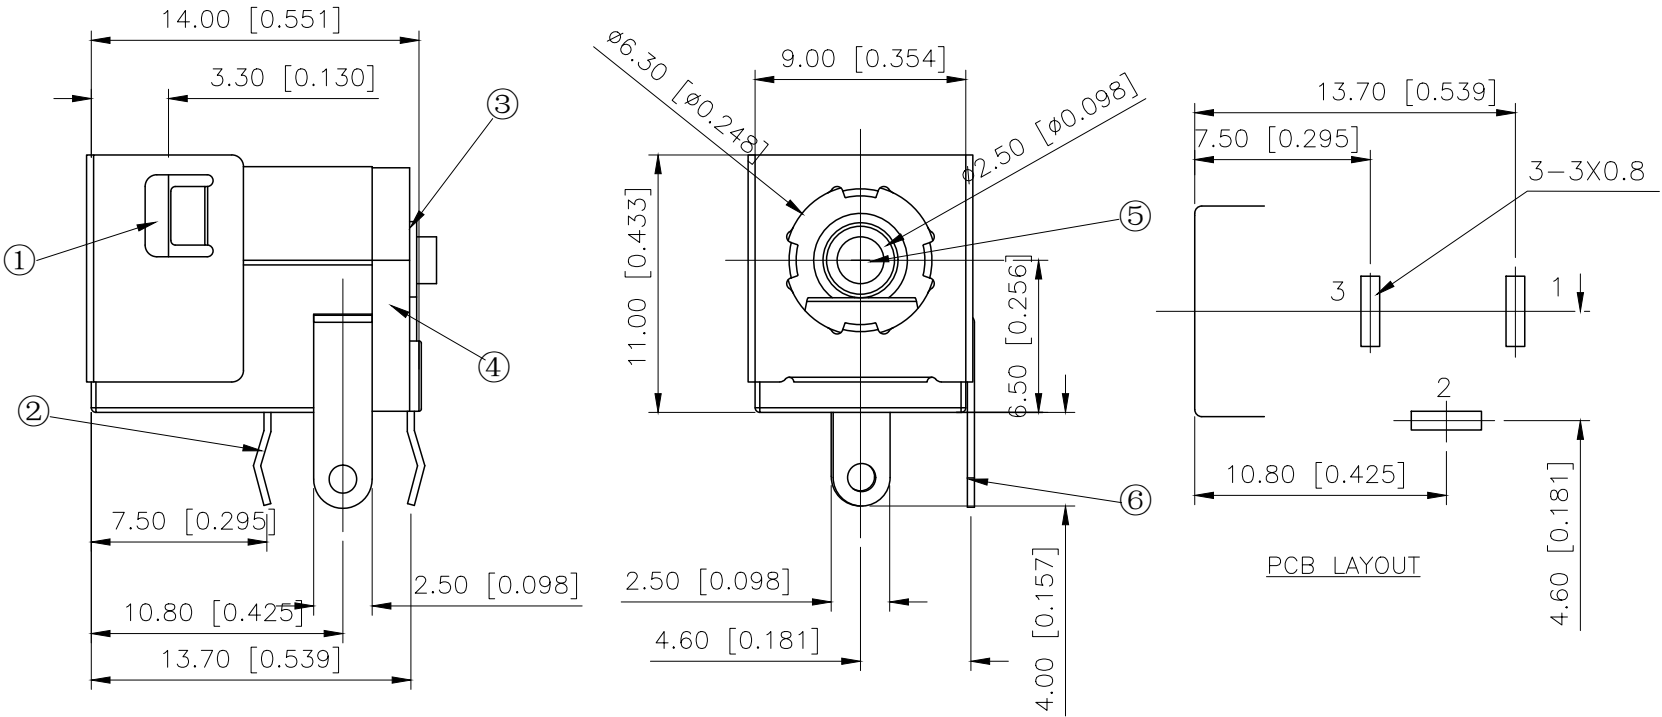

SCHEMATIC	
Model	DC-005F-2.5A
Center Pin	ø2.0mm ø2.5mm

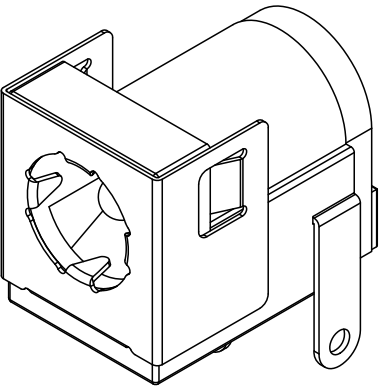

- SPECIFICATIONS:
- 1.Voltage rating: 30V 0.5A
 - 2.Contact resistance: $\leq 0.03\Omega$
 - 3.Insulation resistance: $\geq 100M\Omega$
 - 4.Withstanding voltage: AC500V(50HZ)/min
 - 5.Insertion and extraction force: 3~20N
 - 5.Mating cycles: 5.000次

6	Bends	1	H62 Brass band (Y) =0.30mm	Ag Plated
5	Pin	1	H62 Brass rods	SN Plated
4	Back cover	1	PBT	Black
3	Plain	1	H62 Brass band (Y) =0.30mm	Ag Plated
2	Reeds	1	Phosphor Bronze Strip T=0.20mm	Ag Plated
1	Pedestal	1	PBT	Black
NO	NAME	QTY	MATERIAL	Remark

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: DC POWER JACK		
CHECKED		UNIT: mm/in		PART NO.: DC-005F-2.5A-2.5		
APPROVED		SIZE: A4		DWG NO.: X-DC-005F-2.5A-2.5		
CISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A1