



Kinghelm®

Ø1.00 吸盘位置

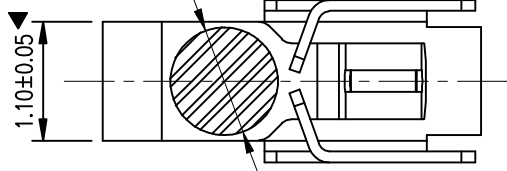

0.90 ± 0.15

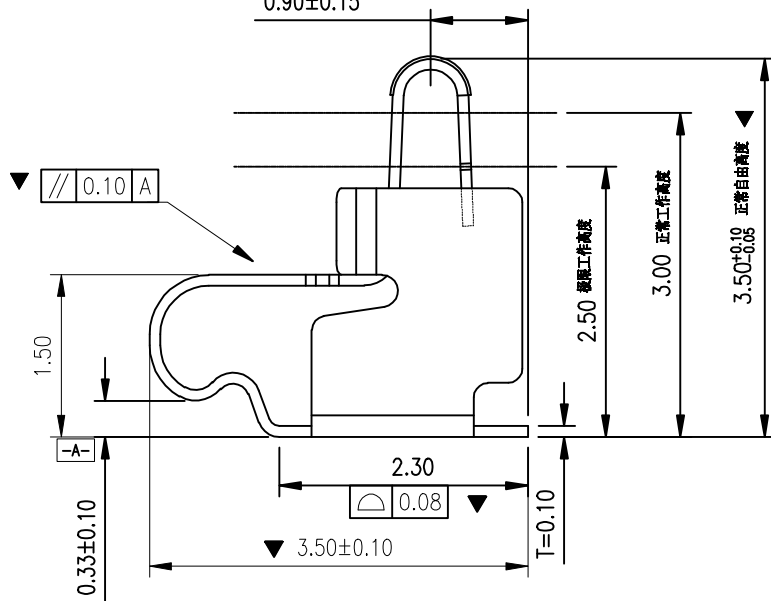

0.10 A

-A-

0.33 ± 0.10

2.30

0.08


3.50 ± 0.10

T=0.10


2.50 标准工作高度

3.00 正常工作高度

3.50 ± 0.10 正常自由高度

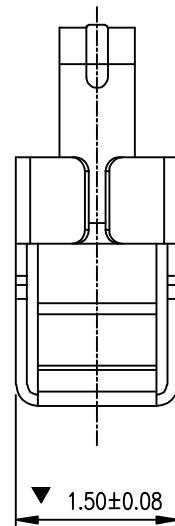


2.10

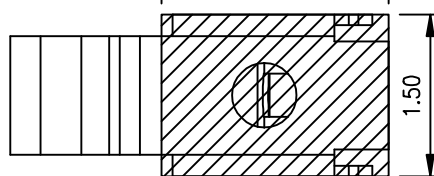

Ø0.60

焊盘尺寸

尺寸公差 ±0.05

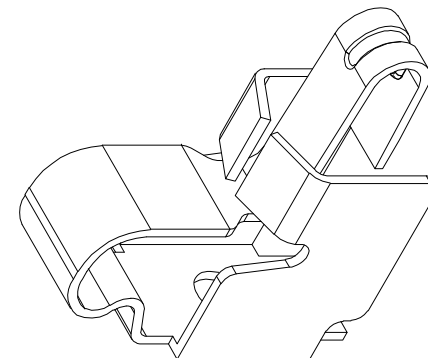

Rev.	ECN	Number	Description	Date	Drawn	Checkd	Approved

技术要求:

- 1.材质:不锈钢SUS301,T=0.10±0.005;
- 2.端子锡脚焊接面和接触面不可有毛边,其他部位毛边最大0.03mm;
- 3.扭曲:45°/1000mm,拱形 5mm/1000mm;
- 4.标示有“▼”符号的为重点控制和检验尺寸;
- 5.未标注之R MAX R0.13;
- 6.电镀须满足48小时盐雾测试;
- 7.寿命测试>2万次,产品弹力要求在60gf~80gf之间
- 8.镍底50~80u”min,焊接区域镀金,接触区域镀金1U”MIN

深圳市金航标电子有限公司

www.kinghelm.com.cn

KH-351525-TP

0755-28190160

GENERAL TOLERANCE

XX. ±0.50

X. ±0.35

.X ±0.25

.XX ±0.15

X' ±2.0'

.X' ±1.0'

.XX' ±0.5'

SCALE:

1:1

UNIT:

mm

SIZE:

A4



DRAWN

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)

TP-066

TITLE

客户图

RF Antenna Spring,SMT,
L3.5*W1.5*H3.5mm

REV.

A

SHEET

1/1