
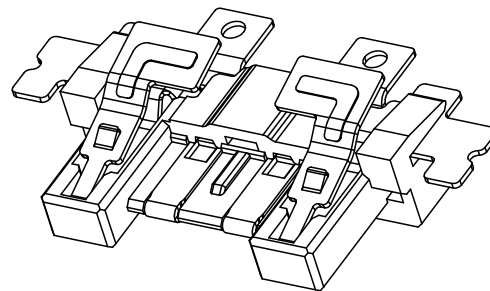
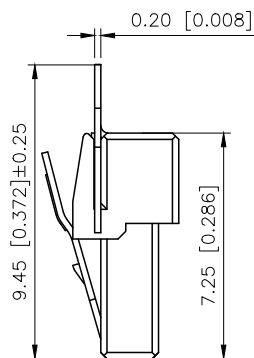
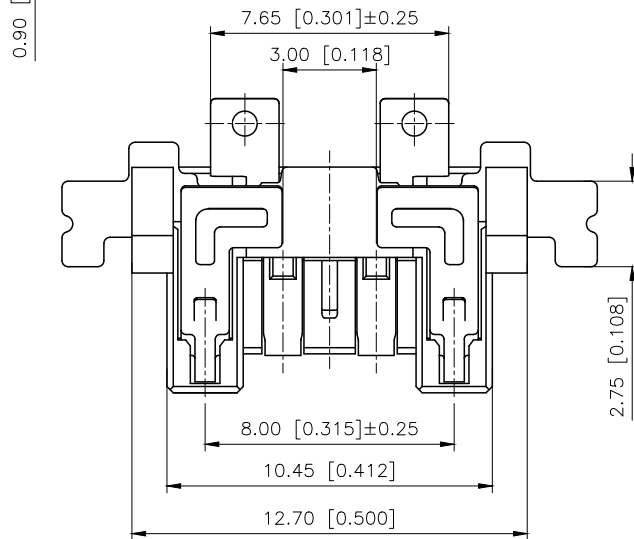


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.28	阿树


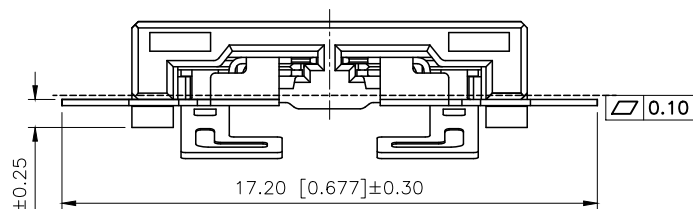


Specifications:
规格:
Voltage rating:200V AC/DC
额定电压: 200V AC/DC
Current rating:1A AC/DC
额定电流: 1A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-25℃-+105℃
温度范围: -25℃-+105℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤30mΩ
接触电阻: ≤20mΩ

PART NO.:

X3002 W M-02-LP SN
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Category:M-Male
④Row No.Pin No:02Pin
⑤Material:LP-LCP UL 94V-0 BEIGE
⑥Plating Category:SN-Tin Plated

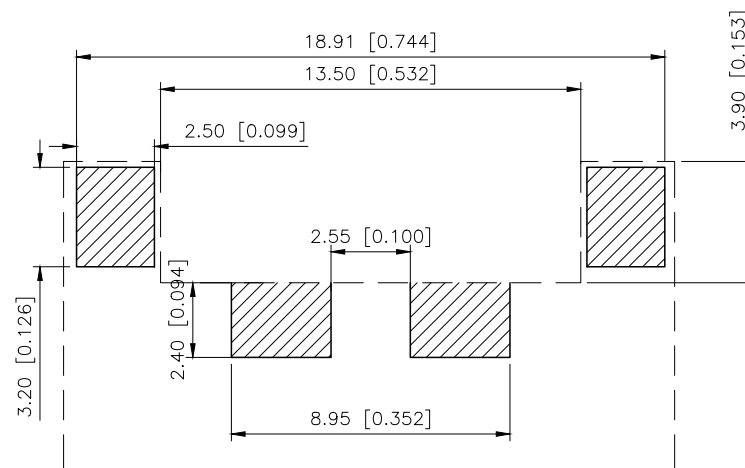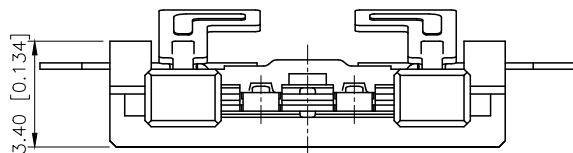

P.C.B LAYOUT

X3002WM-XX-LPSN	LCP	Phosphor Bronze	X3002WF
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 3.0mm BTB Connector
CHECKED		UNIT:	mm/in	PART NO.: X3002WM-XX-LPSN
APPROVED		SIZE:	A4	DWG NO.: