


| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          | 图面升级整理图面        | 2025.05.22 | 阿树     |

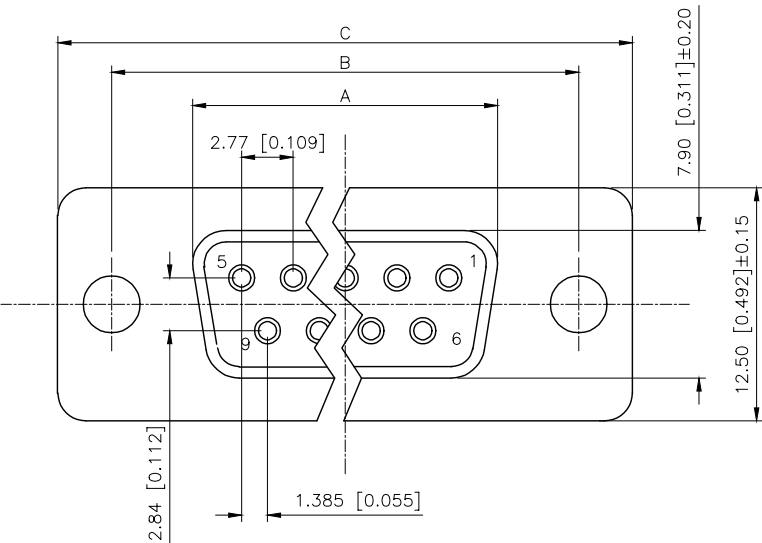

Specifications:

规格:

1.Voltage rating:250VAC/DC  
额定电压: 250V AC/DC

2.Current rating:3A AC/DC  
额定电流: 3A AC/DC

3.Withstanding voltage:500V AC/minute  
耐受电压: 500V AC/分钟

4.Temperature range: -55℃-+105℃  
温度范围: -55℃-+105℃

5.Insulation resistance:1000MΩ MIN  
绝缘电阻: 1000MΩ MIN

6.Contact resistance:30mΩ Max  
接触电阻: 30mΩ Max

Material:

材料:

7.Rubber core:PBT UL94V-0  
胶芯: PBT UL94V-0



8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating  
铁壳: SPCC-SD,镀镍/镀锡/镀金

9.Terminal:Copper alloy  
端子: 铜合金

PART NO.:

X01 15 F I Z W 4  
① ② ③ ④ ⑤ ⑥ ⑦

①Series NO.  
②Row No.Pin No.XX-09;15;25;37  
③Welding Board Angle :F-Female  
④T: Tradutonal C: Car-pin  
⑤Planting Category: 1:1U' 2:2U' 3:3U' 4:5U' 5:15U'  
⑥Color:B-BLACK W-White BL-Blue  
⑦1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4

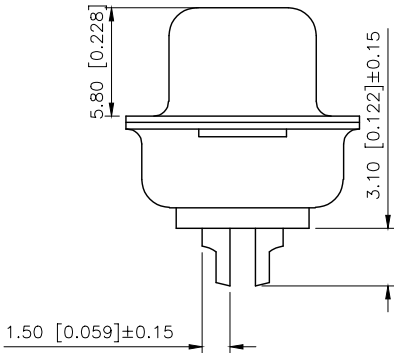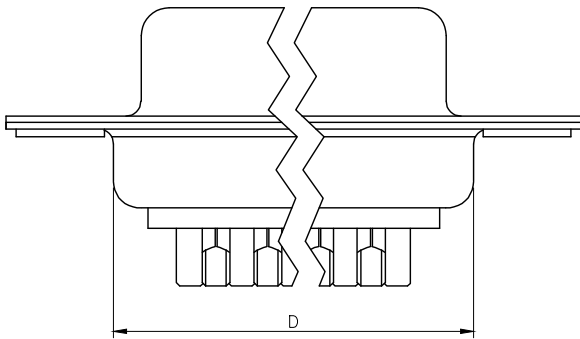

| NUMBER OF POSITIONS | DIMENSION |        |        |        |
|---------------------|-----------|--------|--------|--------|
|                     | A±0.25    | B±0.13 | C±0.38 | D±0.25 |
| 9                   | 16.35     | 24.99  | 30.80  | 19.28  |
| 15                  | 24.75     | 33.30  | 39.20  | 27.65  |
| 25                  | 38.35     | 47.04  | 53.05  | 41.28  |
| 37                  | 54.75     | 63.50  | 69.40  | 57.71  |

| 铜合方式 | TYPE-1: 铜合 | TYPE-2: 前铜实心螺母 | TYPE-3: 后铜空心螺母 | TYPE-4: 后铜空心螺母锁螺丝 |
|------|------------|----------------|----------------|-------------------|
| 图示   |            |                |                |                   |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |             |                      |
|----------|----|-------------|----------------------|
| DESIGN   | 阿树 | VIEW:       | MODEL TYPE: D-SUB    |
| CHECKED  |    | UNIT: mm/in | PART NO.: X0115FT7W4 |
| APPROVED |    | SIZE: A4    | DWG NO.: X0115FT7W4  |