
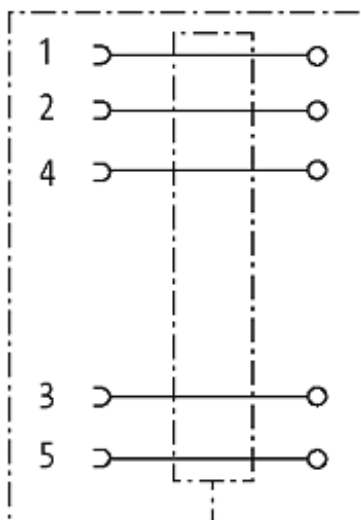


**M12 FEMALE 90° SHIELDED WIREABLE SCREW TERM.**5-pol. max.0,75mm<sup>2</sup> 6-8mm[Link to Product](#)**Illustration**

# Female

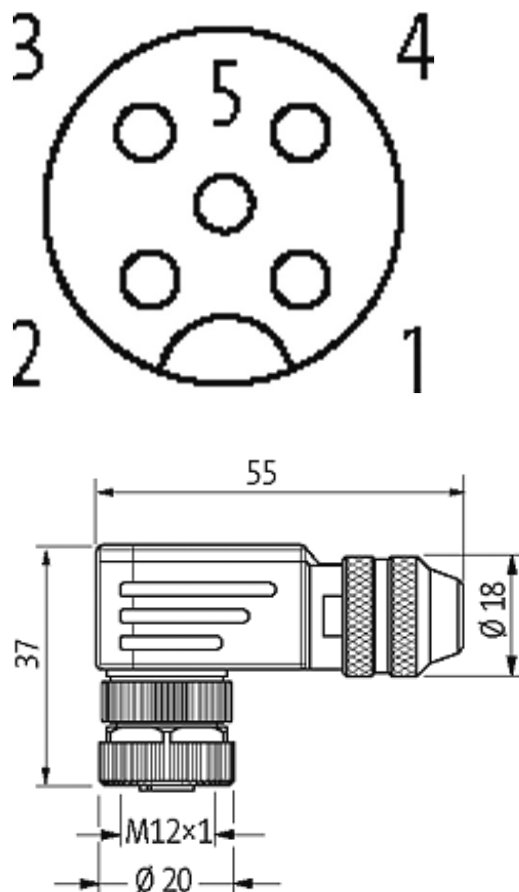

Product may differ from Image

## Form

Form 13441

## Technical Data

|                               |                                        |
|-------------------------------|----------------------------------------|
| Operating voltage             | max. 60 V AC/DC                        |
| Operating current per contact | max. 4 A                               |
| Connection cross section      | max. 0.75 mm <sup>2</sup>              |
| Sealing range (cable Ø)       | 6...8 mm                               |
| Protection                    | IP67 inserted and tightened (EN 60529) |
| Housing                       | Brass, nickel plated                   |

## General data

Temperature range -25...+85 °C

## Commercial data

|                       |               |
|-----------------------|---------------|
| country of origin     | DE            |
| customs tariff number | 85369010      |
| EAN                   | 4048879198776 |

|                        |          |
|------------------------|----------|
| eClass                 | 27279218 |
| minimum order quantity | 1        |