

标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

Materials and Electroplating

- ①. Plastic body: PA66
- ②. Solder pin: copper, Nickel tin plating
- ③. Nut: Copper, Nickel Plated

Electrical performance

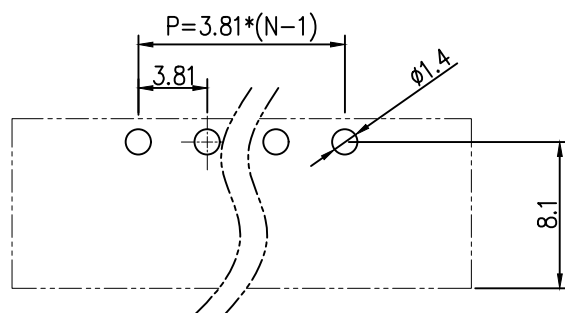

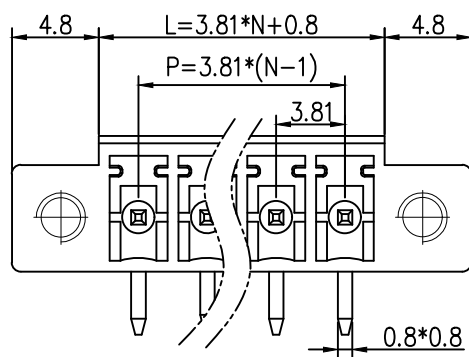
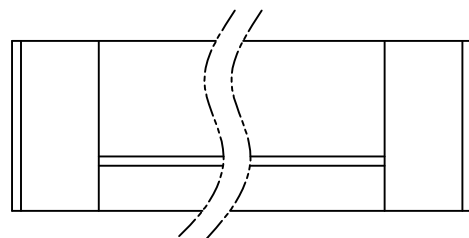
Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

mechanical properties

Temperature range: -40 $^{\circ}\text{C}$ ~+105 $^{\circ}\text{C}$ Instantaneous temperature: +250 $^{\circ}\text{C}$, 5 seconds

PCB LAYOUT

2	插针	铜	镀镍锡	
1	底座	PA66	绿色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE		接线端子																				
			料 号 PART NO		HC-JXDZRM-3.81-4P																				
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 例 SCALE	1 : 1																					
<table border="1"><thead><tr><th colspan="3">公差参数</th></tr><tr><th>Form</th><th>DimP</th><th>DimL</th></tr></thead><tbody><tr><td>2-6P</td><td>±0.10</td><td>±0.20</td></tr><tr><td>7-12P</td><td>±0.20</td><td>±0.30</td></tr><tr><td>13-18P</td><td>±0.25</td><td>±0.40</td></tr><tr><td>19-24P</td><td>±0.30</td><td>±0.50</td></tr></tbody></table>			公差参数			Form	DimP	DimL	2-6P	±0.10	±0.20	7-12P	±0.20	±0.30	13-18P	±0.25	±0.40	19-24P	±0.30	±0.50	单 位 UNIT	MM	制 图 DRAW	AhYe	
			公差参数																						
			Form	DimP	DimL																				
			2-6P	±0.10	±0.20																				
			7-12P	±0.20	±0.30																				
13-18P	±0.25	±0.40																							
19-24P	±0.30	±0.50																							
X.X ±0.35	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云																					
X.XX ±0.25	版 本 REV	A	批 准 APPROVE	赵亮亮																					
X.XXX ±0.15																									