

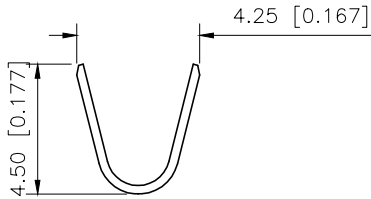
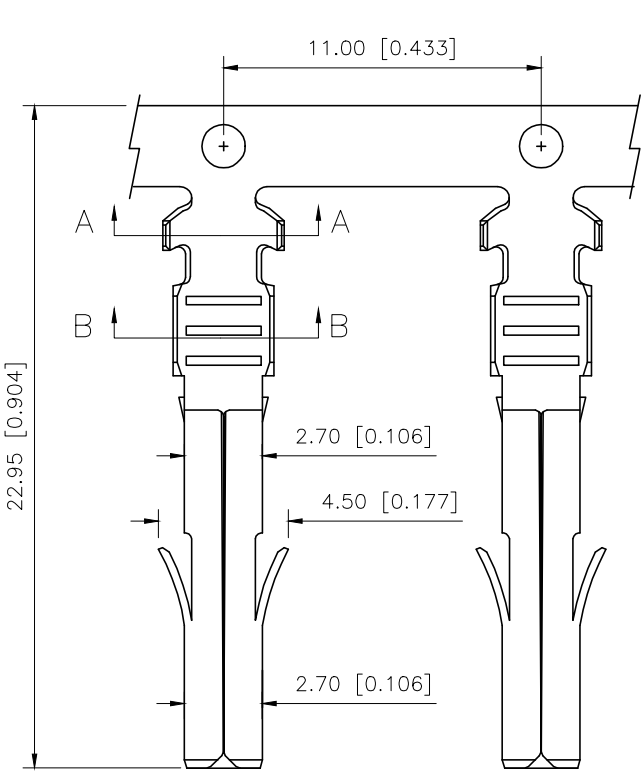


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.23	阿树

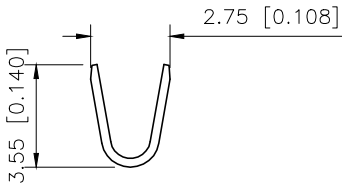

SEC:A-A

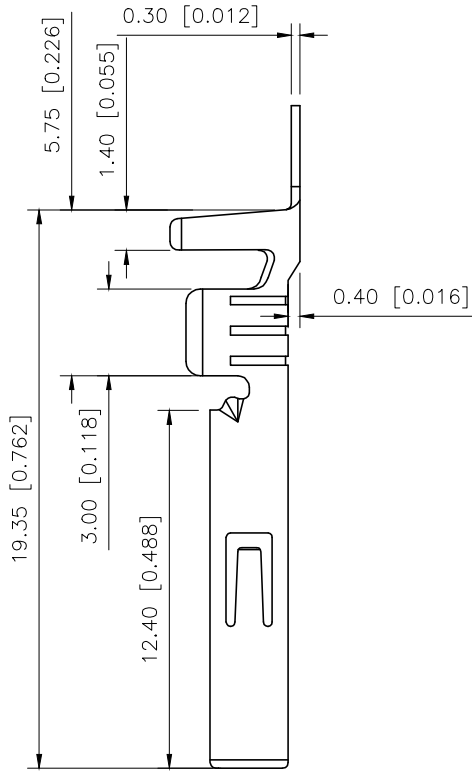

SEC:B-B

- SPECIFICATIONS
- Voltage rating: 600V AC/DC
 - Current rating: 13A AC/DC
 - Withstanding Voltage: 3500V AC/minute
 - Temperature range: -40°C ~ +125°C
 - Insulation resistance: $\geq 1000M\Omega$
 - Contact resistance: $\leq 15m\Omega$

PART NO.:

X9635 T F-B SN-U
① ② ③ ④ ⑤ ⑥

1. Series No
2. Category: T-Terminal
3. Category: F-Female Terminal
4. Material: B-Beass
5. Plating: SN-Plated Tin
6. Type: U-upgrade version

X9635TF-BSN-U	Brass	AWG#24~16	X9635HM
PART NO	Material	Wire Range	Suitable XKB Housing

ANGULAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	6.35mm Crimp Style Connectors
PART NO.:	X9635TF-BSN-U
DWG NO.:	