

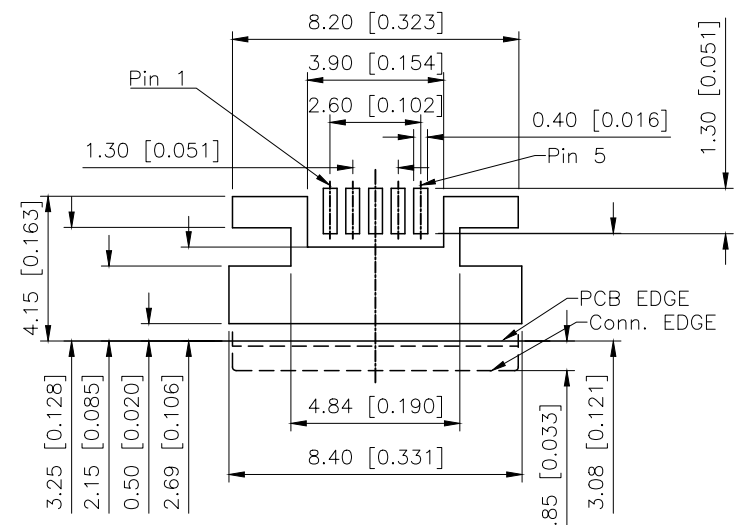


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.10	阿树

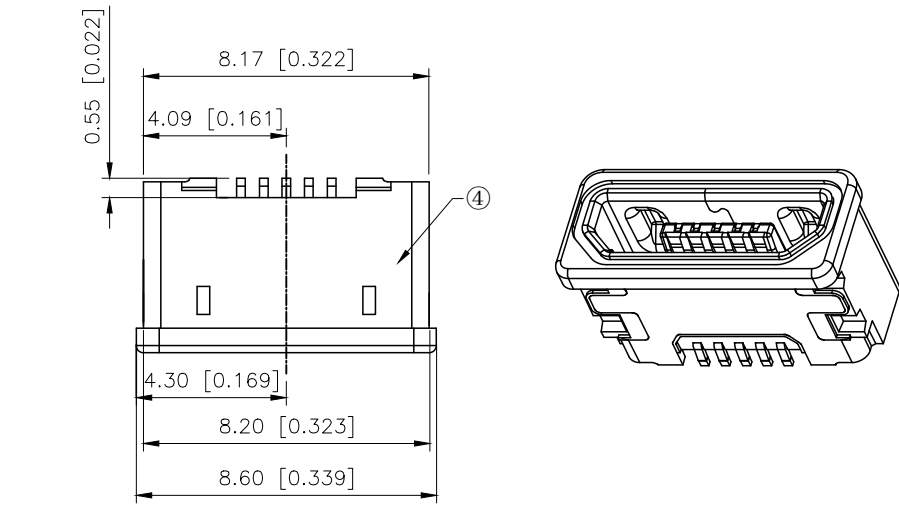

Recommended PCB Layout
(General Tolerance: ±0.05)

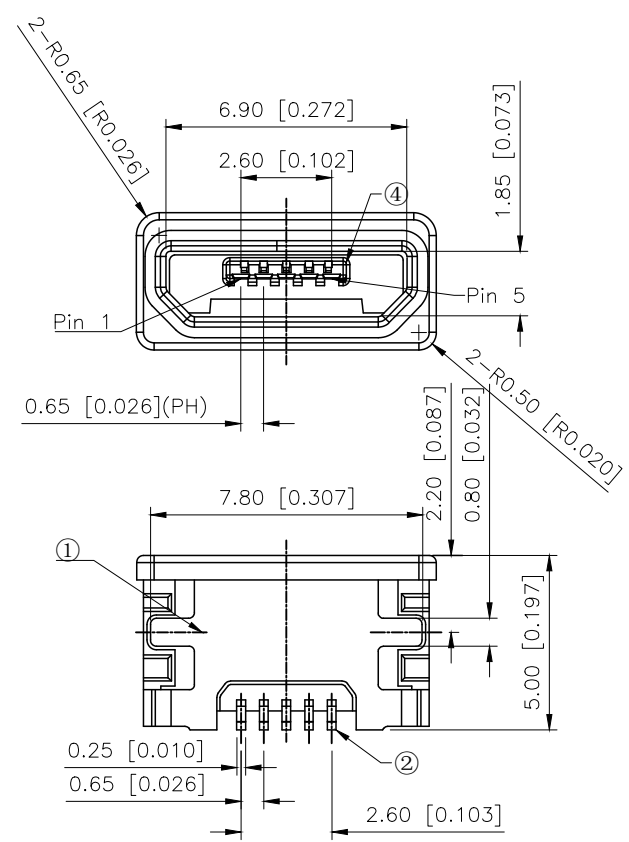

- 1.Contact Resistance:30m0HM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:1000M OHM Min.;
- 4.Mating And unmating Force:
Mating Force:35N Max/unmating Force:8N Min;
- 5.Durability:10000 Cycles;

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



③	Shell	1	Stainless Steel	
②	Terminal	5	Copper alloy	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

DESIGN	阿树	VIEW:		MODEL TYPE:	MICRO USB
CHECKED		UNIT:	mm/in	PART NO.:	U-E-M5SS-Y-5
APPROVED		SIZE:	A4	DWG NO.:	