

1

2

3









4

A

B

C

D

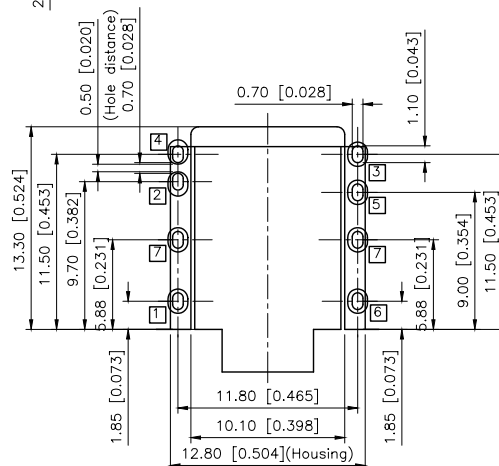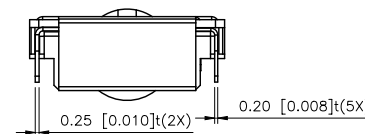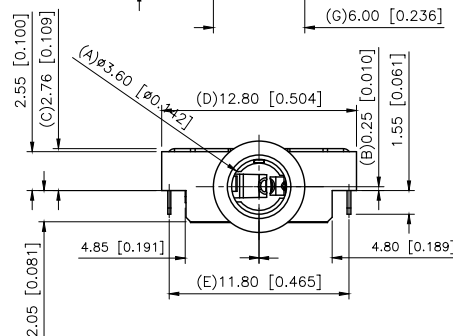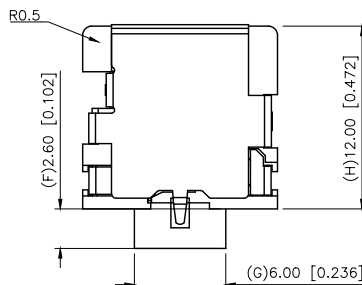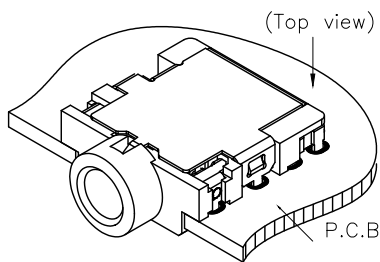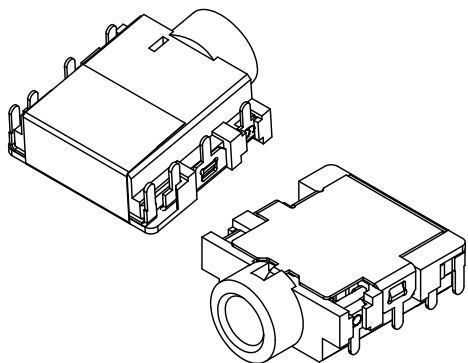

P.C.B. Layout
(Top view)

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:

UNIT: mm/in

SIZE: A4

Plastic	PA9T	
Terminal 4	copper alloy	silver
Terminal 3	copper alloy	silver
Terminal 2	copper alloy	silver
Terminal 1	copper alloy	silver
PAPT NAMF	MATERIAL	PLATING

MODEL TYPE:
3.5 PHONE JACK

PART NO.:
PJ-3150


DWG NO.:
X-PJ-3150

SCALE	PAGE	REVISION
N/A	1/1	A1

REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	/
A1	N/A		图面升级整理图面	2025.06.26

Model No.	PJ-3150	PJ-3151	PJ-3152	PJ-3153	PJ-3154
Schematic					

Specification:
1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤30mΩ;
After life test:≤50mΩ
3.Insulation resistance: ≥100MΩ (500VDC);
After life test:≥50MΩ
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3N~25N;
6.life test: 5000cycles min;
7.Operation temperature range:-20℃~70℃
8.Preservative temperature range:-40℃~85℃
9.Sign"▲" is importance dimension

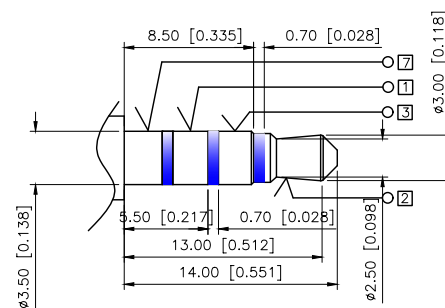

Matching Plug