

1

2

3

4

A

B

C





D

A

B

C

D

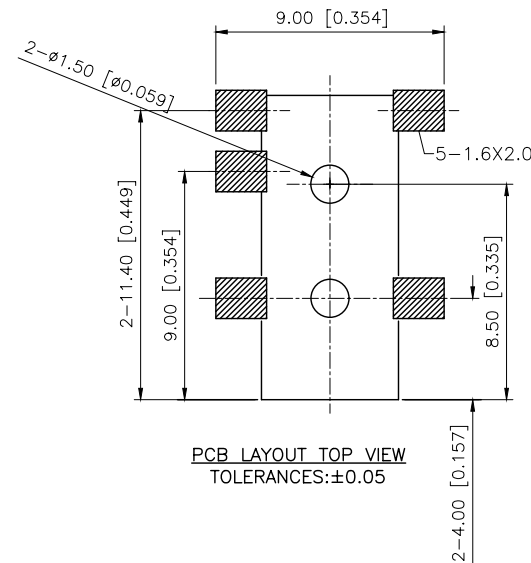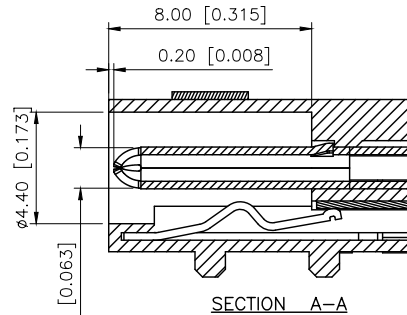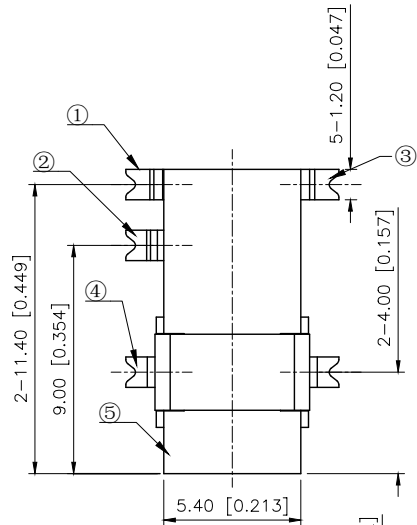

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING:12V, 4A Min.

1-2.CONTACT RESISTANCE

50 MILLIOHMS Max. FOR INITIAL,

80 MILLIOHMS Max. AFTER 5000 CYCLES

1-3.INSULATION RESISTANCE: 100 MEGAOHMS Min
BY 500V DE AFTER 1 MINUTE.1-4.DIELECTRIC WITHSTANDING VOLTAGE:500V
RMS AFTER1 MINUTE

2.MECHANICAL CHARACTERISTICS:

2-1.INSERTION FORCE:0.3~3.0 KGF(2.94~29.4N)

2-2. WITHDRAWAL FORCE :0.3~3.0 KGF (2.94~29.4N)

3.LIFE TEST:5,000 CYCLES MIN.

⑤	Housing	1	PA9T	Black
④	Terminal 4#	1	C2680R-EH T=0.30	Ag10U",Ni底50U"
③	Terminal 3#	1	C2680R-EH T=0.30	Ag10U",Ni底50U"
②	Terminal 2#	1	C5210R-EH T=0.30	Ag10U",Ni底50U"
①	Terminal 1#	1	C2680R-EH T=0.30	Ag10U",Ni底50U"
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	④	MODEL TYPE:	DC POWER JACK
CHECKED		UNIT:	mm/in	PART NO.:	DC-105-4A-1.6-SMT
APPROVED		SIZE:	A4	DWG NO.:	DC-105-4A-1.6-SMT
		SCALE	N/A	PAGE	1/1
		REVISION	A1		

1

2

3

4