

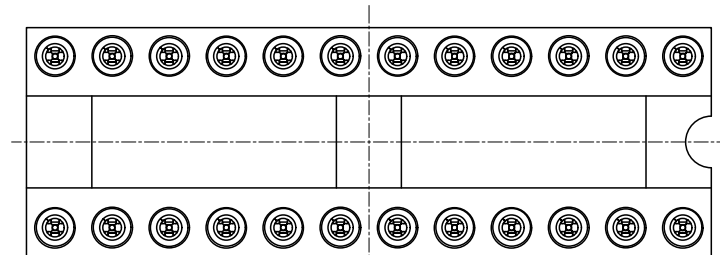
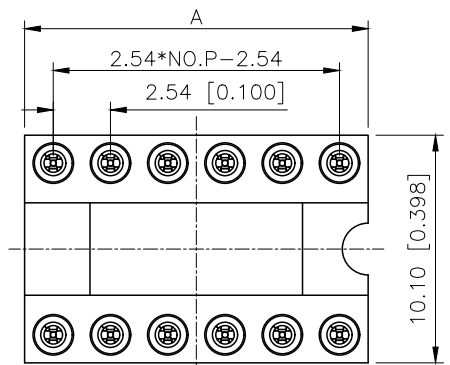


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.19	阿树

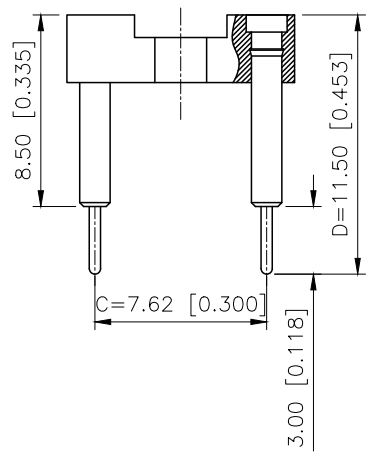


Technical Date
Pin(outer sleeve):Brass,machined CuZn38pb2
Clip (Contact 4 Flinger):Beryllium copper,heat teated
Insulator:PBT UL94V-0, colour:black
Gold Plated:2um"/80u"Ni,GF
Current rating:3Amps
Mechanical Life:min 500 cycles
Contact resistance: 10mΩ max
Dielectric strength:1000V
Operating temperature:-40°C~+105°C
Soldering temperature:+255°C

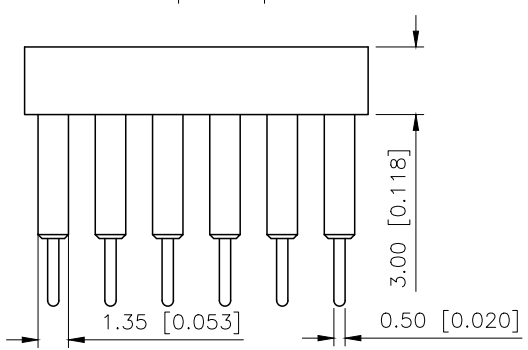

PART NO.:

X5621 F V-2x12-C762 D1150-1150
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:F-Female
- ③Welding Board Angle:V-Stright 180°
- ④Row No-Pin No:2xXX-2x01Pin-2xXXPin
- ⑤Line spacing:C=7.62mm
- ⑥Pin Length:D=11.50mm
- ⑦1150:Type1150

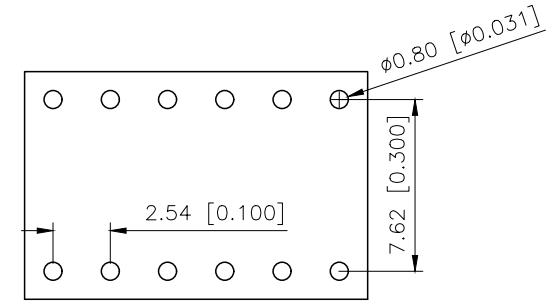

Recommended P.C.B
Layout(±0.05)

Dimensions(mm)			
Poles	A	Poles	A
2x02	5.08	2x09	22.86
2x03	7.62	2x10	25.40
2x04	10.16	2x11	27.94
2x05	12.70	2x12	30.48
2x06	15.24	2x13	33.02
2x07	17.78	2x14	35.56
2x08	20.32	2x15	38.10

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: 2.54mm BTB Style Connector		
CHECKED		UNIT: mm/in	PART NO.: X5621FV-2x12-C762D1150-1150		
APPROVED		SIZE: A4	DWG NO.: X-X5621FV-2x12-C762D1150-1150		
PRECISION CO.,LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO.,LIMITED