



REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1998	A	RELEASED	JN	06/15/09	JWM	06/15/09	JWM	06/15/09

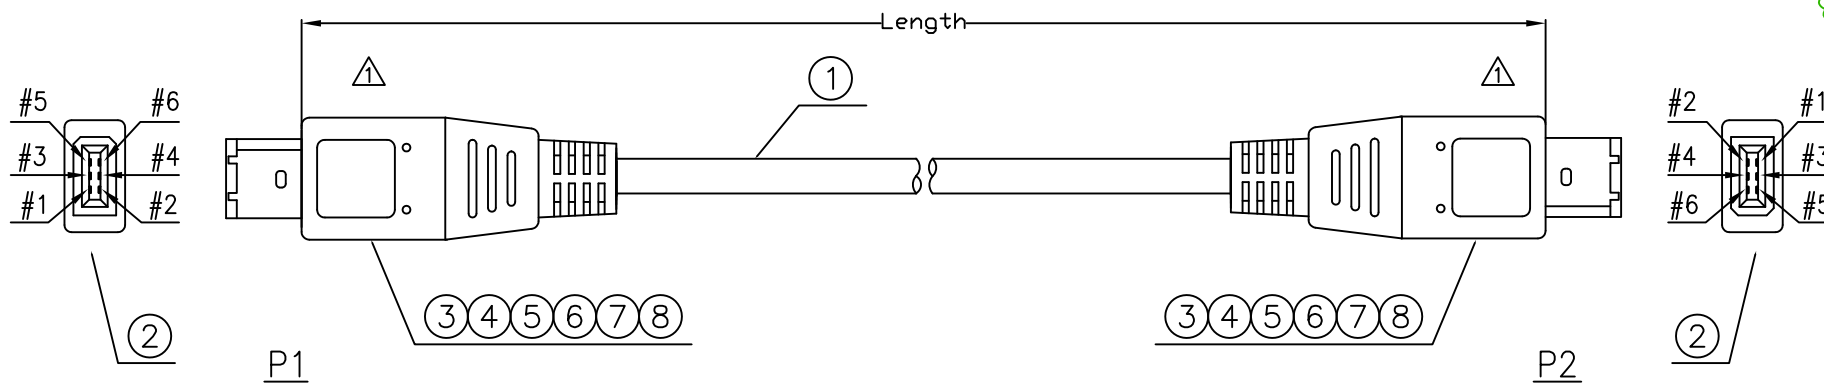

PIN ASSIGNMENT

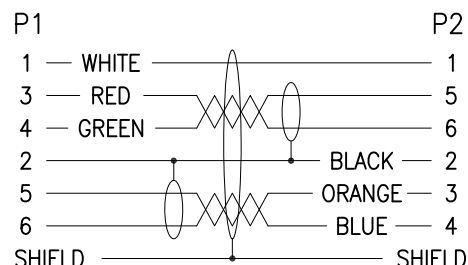

P/N	LENGTH (mm)
SPC20019	72±1 [1830±50]
SPC20017	120±2 [3050±50]
SPC20018	180±2 [4575±50]

NOTES:

- CABLE: [28AWG(7/0.127)*1P+AL/MY+BD(16/5/0.10)]
*2C+22AWG(7/0.254)*2C+MY+AL/MY+85%BD(24/5/0.12/)}TIN
INSULATION WIRE: FO-PE, OD=Ø1.05±0.05MM(28#)
SR-PVC, OD=Ø1.35±0.07mm(22#)
COLOR: RED&GREEN BLUE&ORANGE(28#) WHITE, BLACK(22#)
JACKET: 80°C PVC, OD=Ø6.1±0.20MM
COLOR: PLATINUM GRAY
- PVC: PLATINUM GRAY
- CONNECTOR: 1394 6P MALE NICKEL-PLATING INSULATOR COLOR: BLACK

8	PVC-GY22/50
7	HI TEAMP TAPE: W: 8MM
6	HI-TEAMP-TAPE W: 6MM
5	TUBE-HT-Ø1.0MM
4	FOIL-AL-6MM
3	SOL-WIRE-FULL TIN-1.0
2	IE1394-6P<BK>, NICKEL-PLATED
1	[(28#*1P+A+B)*2+22#*2C]+MYLAR+A+B-GY22-6.0U20276
NO.	DESCRIPTION

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Jason Nash

CHECKED BY:

Jeff McVicker

APPROVED BY:

Jeff McVicker

DATE:

06/15/09

DATE:

06/15/09

DATE:

06/15/09

DRAWING TITLE:

Firewire Cable, Host-Host, 6 pin Male - 6 pin Male

SIZE DWG. NO.

A

Ta-741

ELECTRONIC FILE

Ta-741.dwg

REV

A

SCALE: NTS

U.O.M.: Millimeters

SHEET: 1 OF 1