
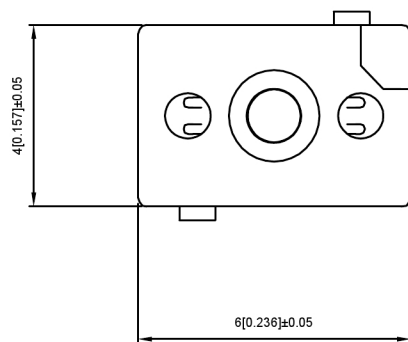
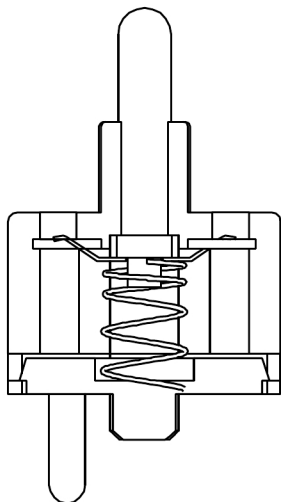
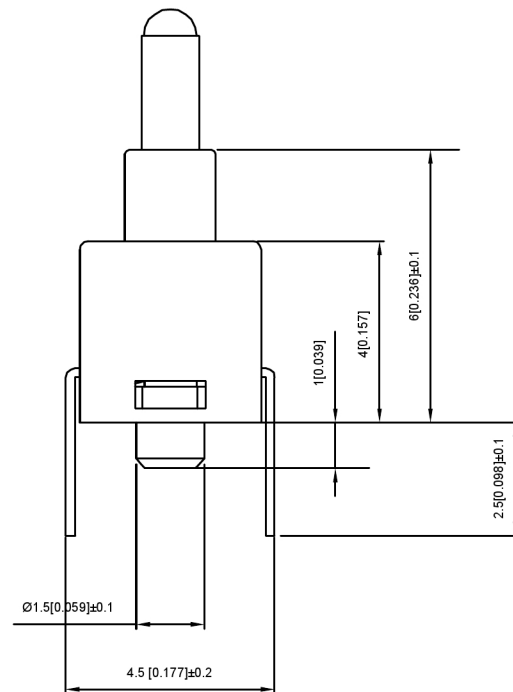


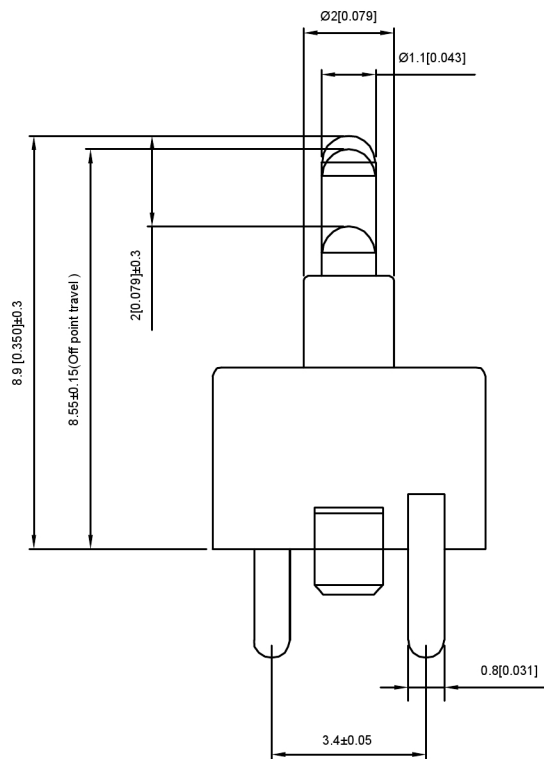

Specifications

CONTACT RATING:0.1A 30 VDC

MECHANICAL ELECTRICAL LIFE:50,000 cycles

CONTACT RESISTANCE:150Ωmax. initial

INSULATION RESISTANCE:100Ωmin. 100VDC

OPERATING TEMPERATURE:-10℃to+60℃

DIELECTRIC STRENGTH:100 volts AC 60 HZ

PACKAGING: Bulk

⑥	Spring		1	Sus	Natural	
⑤	Contact Spring	—	1	Phosphor Bronze	Plating silver	—
④	Terminal	—	2	Phosphor Bronze	Plating silver	—
③	Base	—	1	Nylon		—
②	Cover	—	1	Nylon		—
①	Keystake	—	1	Nylon		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

					ANGULAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
REVISIONS						UNSPECIFIED TOLERANCES
		DATE	REVISED	APPROVED		
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

DSND		SCALE: N/A	MODEL TYPE: DETECT SWITCH
DWN		VIEW:	PART NO.: TM-W-09
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			SHEET
			REVISIC
			1/1
			A0