



Series 220

7x7mm Compact Rotary DIP Switch

- Robust metal bracket design
- Standard through hole and surface mount gull-wing terminal configurations
- Binary coded decimal, Hexadecimal code and Single pole output
- Clockwise or counterclockwise rotation



Ordering Information

Series	Terminal Type	Actuator Height	Number of Positions	Packaging Type														
220	AM	A	04	R														
↓		↓																
<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>AM</td><td>Surface mount gull wing, 3.8mm height</td></tr><tr><td>AD</td><td>Standard through hole, 3.6mm height</td></tr></table>	Code	Spec.	AM	Surface mount gull wing, 3.8mm height	AD	Standard through hole, 3.6mm height	<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>A</td><td>Flush arrow rotor</td></tr><tr><td>B</td><td>Knurled, slotted, flattened shaft</td></tr><tr><td>C</td><td>Knurled, slotted shaft</td></tr></table>	Code	Spec.	A	Flush arrow rotor	B	Knurled, slotted, flattened shaft	C	Knurled, slotted shaft	↓		
Code	Spec.																	
AM	Surface mount gull wing, 3.8mm height																	
AD	Standard through hole, 3.6mm height																	
Code	Spec.																	
A	Flush arrow rotor																	
B	Knurled, slotted, flattened shaft																	
C	Knurled, slotted shaft																	
		<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>04</td><td>4 Positions</td></tr><tr><td>10</td><td>10 Positions</td></tr><tr><td>16</td><td>16 Positions</td></tr></table>	Code	Spec.	04	4 Positions	10	10 Positions	16	16 Positions								
Code	Spec.																	
04	4 Positions																	
10	10 Positions																	
16	16 Positions																	
		↓																
		<table><tr><th>Code</th><th>Spec.</th></tr><tr><td>Blank</td><td>Tube packaging only for through hole terminals</td></tr><tr><td>R</td><td>Tape & reel packaging only for surface mount terminals</td></tr></table>			Code	Spec.	Blank	Tube packaging only for through hole terminals	R	Tape & reel packaging only for surface mount terminals								
Code	Spec.																	
Blank	Tube packaging only for through hole terminals																	
R	Tape & reel packaging only for surface mount terminals																	

Notes: Contact CTS for other common features not listed.



Electrical Specifications

Parameter	Conditions & Remarks	Min	Max	Unit
Output	Binary coded decimal		10	position
	Hexadecimal		16	
	Single pole		4	
Contact Resistance			100	milliohms
Insulation Resistance	Between insulated terminals	1000		megohms
Dielectric Strength	250 Vac between adjacent switches		1	minute
Nonswitching Rating			100 or 50	mA or VDC
Load		1 μ A 20m		VDC

Mechanical and Environmental

Soldering	Maximum reflow temperature, 260°C for 5 seconds Maximum wave temperature, 260°C for 10 seconds Maximum manual temperature, 350°C for 4 seconds
RoHS	Lead-Free. Fully compliant to RoHS
Rotational Torque:	40~200 gf-cm
Actuation Life	10,000 steps
Marking:	Special top marking available-consult CTS
Packaging :	Standard anti-static tube packaging for through hole terminal Standard tape and reel packaging for gull wing terminal
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range:	-40°C to +85°C

Mechanical Specifications

Figure 1 – 220AM_10, 16R - Surface Mount Gull Wing, 10 and 16 Position

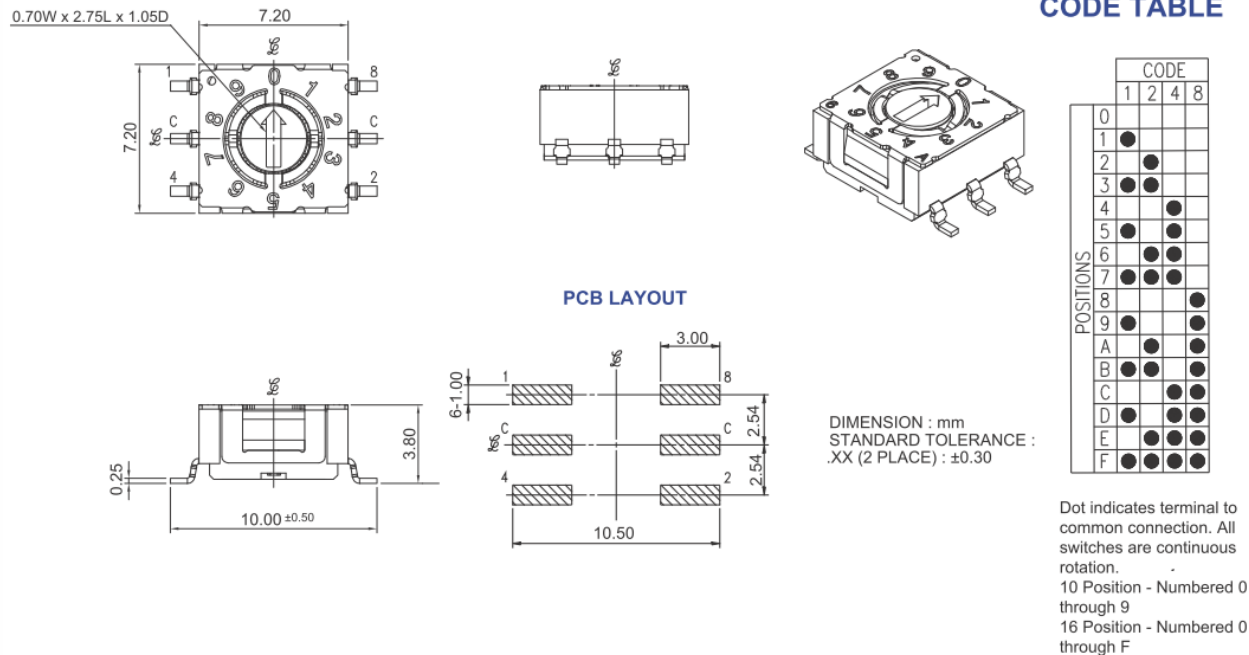


Figure 2 – 220AD_10, 16 - Standard Through Hole, 10 and 16 Position



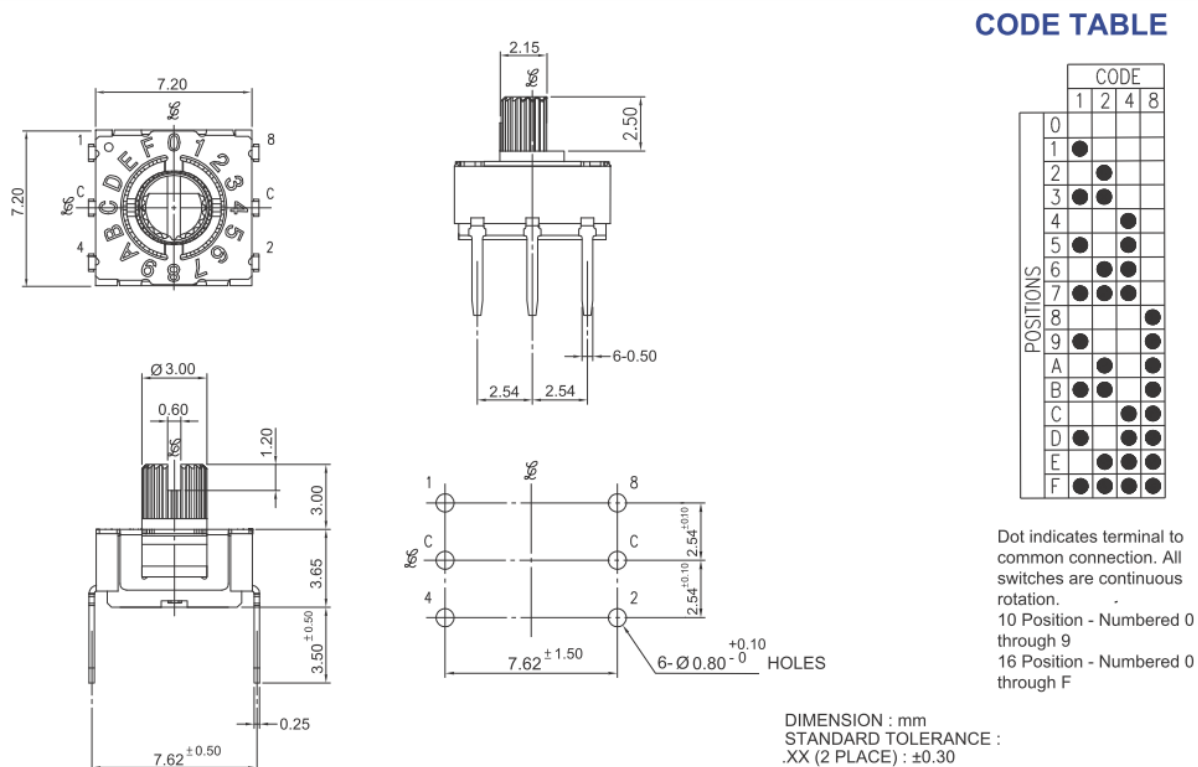


Figure 3 – 220AM_04R - Surface Mount Gull Wing, 4 Position

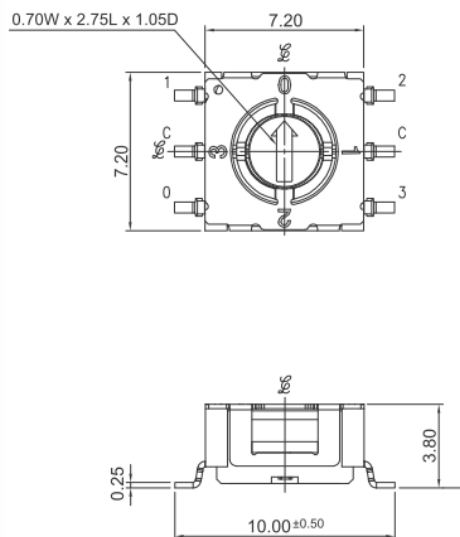

PCB LAYOUT





CODE TABLE

		CODE			
		0	1	2	3
POSITIONS	0	●			
	1		●		
	2			●	
	3				●

Dot indicates terminal to common connection. All switches are continuous rotation.

DIMENSION : mm
STANDARD TOLERANCE :
.XX (2 PLACE) : ± 0.30

Figure 4 – 220AD_04 - Standard Through Hole, 4 Position

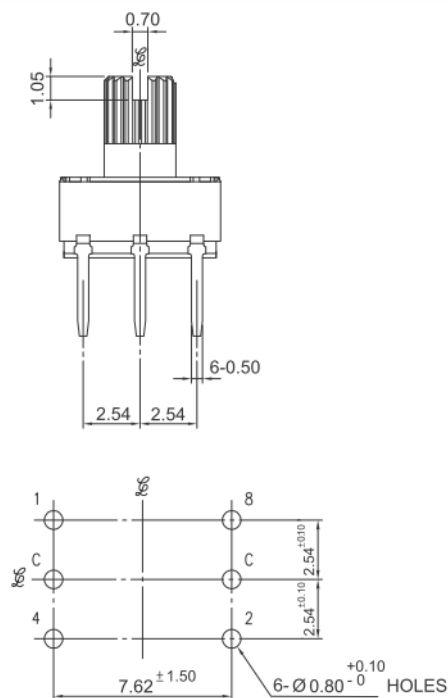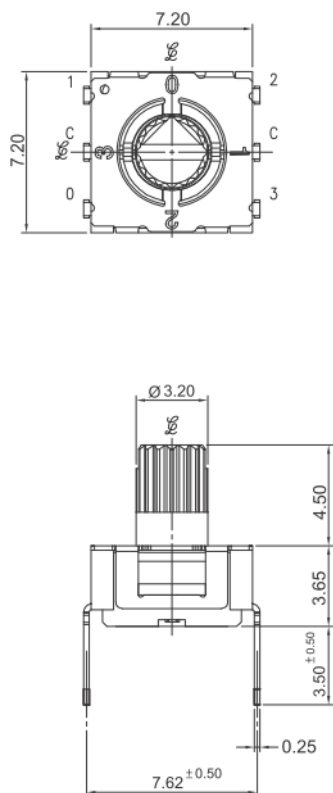


CODE TABLE

		CODE			
		0	1	2	3
POSITIONS	0	●			
	1		●		
	2			●	
	3				●

Dot indicates terminal to common connection. All switches are continuous rotation.

DIMENSION : mm
STANDARD TOLERANCE :
.XX (2 PLACE) : ± 0.30

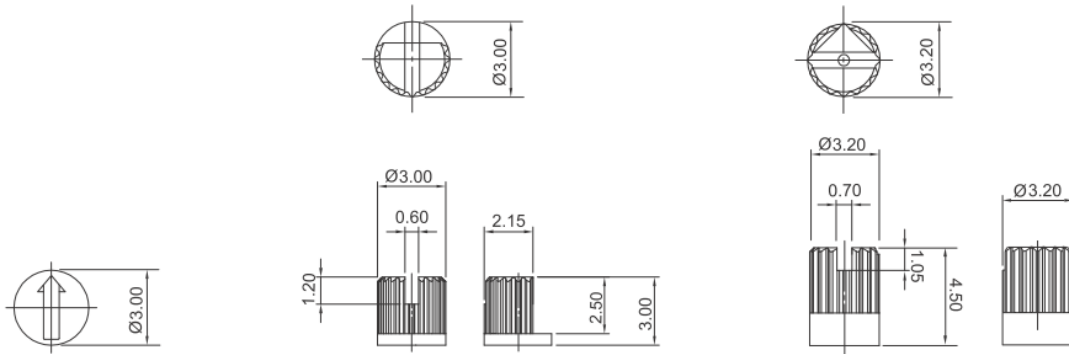


A: FLUSH ARROW ROTOR

B: KNURLED, SLOTTED, FLATTED SHAFT


C: KNURLED, SLOTTED SHAFT

DIMENSION : mm
STANDARD TOLERANCE :
.XX (2 PLACE) : ± 0.30


Position Options



04: 4 POSITIONS



10: 10 POSITIONS




16: 16 POSITIONS

Packing: Tape and Reel


TAPE : ↗

(A) 220AMAxR –MATERIAL& DIMENSIONS: ↗

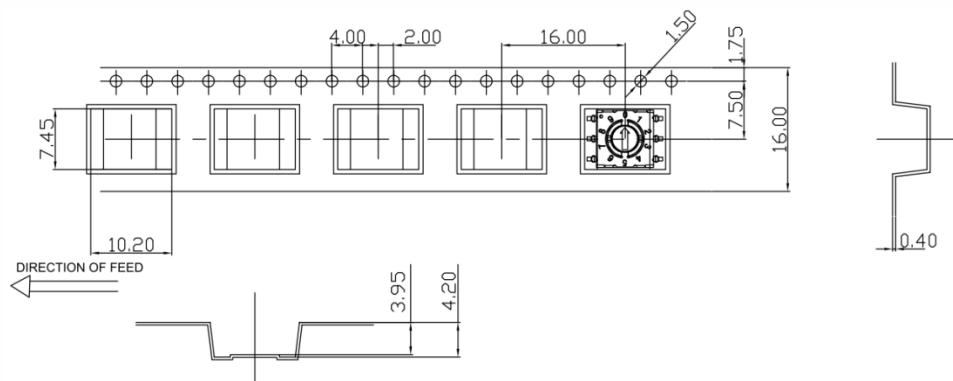


MATERIAL: CONDUCTIVE POLYSTYRENE, BLACK COLOR.
ALL DIMENSIONS MEET EIA-481-2A REQUIREMENTS.
CARRIER TAPE THICKNESS: 0.40 ± 0.05 MM.
PACKING LENGTH PER 13" REEL: 16.6 METERS.
COMPONENT LOADED PER 13" REEL: 1038 PCS.
SPQ: 1000 PCS/ REEL.

(B) 220AMBxxR – MATERIAL & DIMENSIONS:

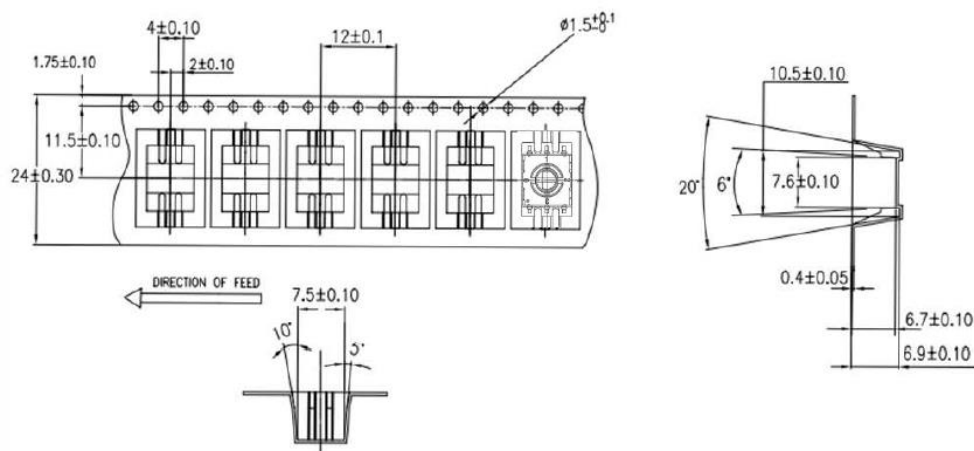


MATERIAL: ANTI-STATIC POLYSTYRENE, TRANSPARENT, BLACK COLOR.
ALL DIMENSIONS MEET EIA-481-B REQUIREMENTS.
CARRIER TAPE THICKNESS: 0.40 ± 0.05 MM.
PACKING LENGTH PER 13" REEL: 8.93 METERS.
COMPONENT LOADED PER 13" REEL: 744 PCS.
SPQ: 700 PCS/REEL.

(C) 220AMCxxR – MATERIAL & DIMENSIONS:

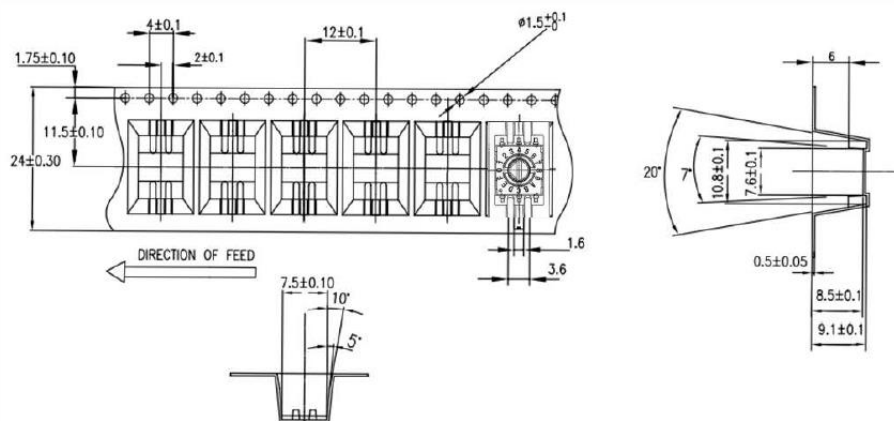


REEL:

(A) SPECIFIED REEL PARTS DIMENSIONS : (COMMON TO ALL SMT COMPONENTS)

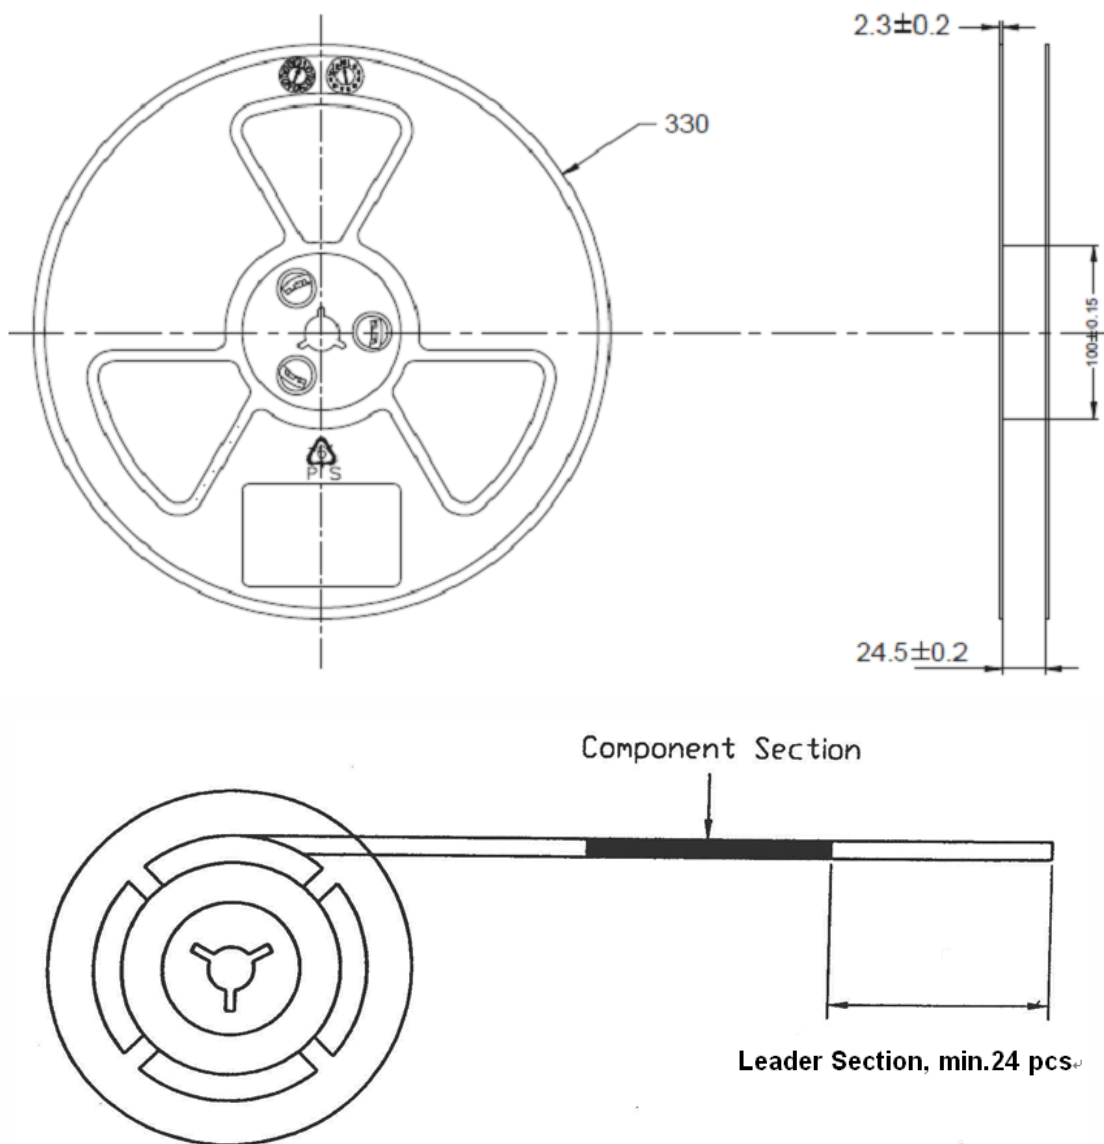

TAPE BREAK FORCE, PEEL STRENGTH AND ANGLE: REQUIRED SETTINGS :

- TOP COVER TAPE PEEL FORCE : 10 ~ 140 gm
- ANGLE BETWEEN THE TOP COVER TAPE AND THE DIRECTION OF FEED DURING PEEL OFF : 165° ~ 180°

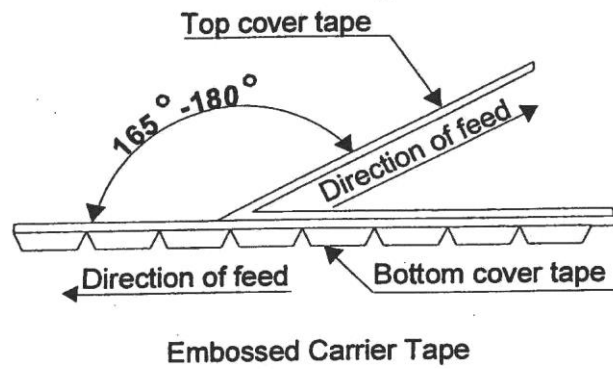

THE COVER TAPES MAY NOT EXTEND OVER THE DEGE OF THE CARRIER TAPE OR COVER ANY PART OF THE SPROCKETS HOLES.