

A



Specifications:

规格:

1.Voltage rating:250VAC/DC

额定电压: 250V AC/DC

2.Current rating:3A AC/DC

额定电流: 3A AC/DC

3. Withstanding voltage: 500V AC/minute

耐受电压: 500V AC/分钟

4. Temperature range: -55°C — $+105^{\circ}\text{C}$

温度范围: $-55^{\circ}\text{C}-+105^{\circ}\text{C}$

5. Insulation resistance: 1000MΩ MIN

绝缘电阻:1000MΩ MIN

6.Contact resistance:30mΩ Max

接触电阻: 30mΩ Max

Materials:

材料:

7.Rubber core:PBT UL94V-0



胶芯: PBT UL94V-0

8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating

铁壳: SPCC-SD, 镀镍/镀锡/镀金

9.Terminal:Copper alloy

端子: 铜合金

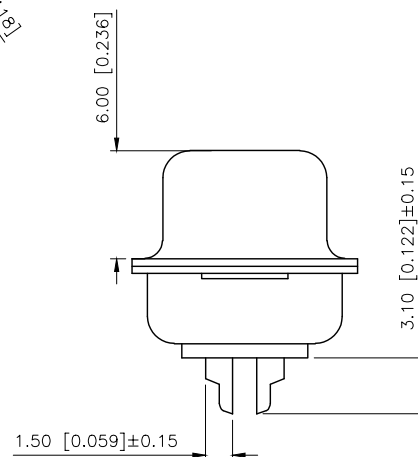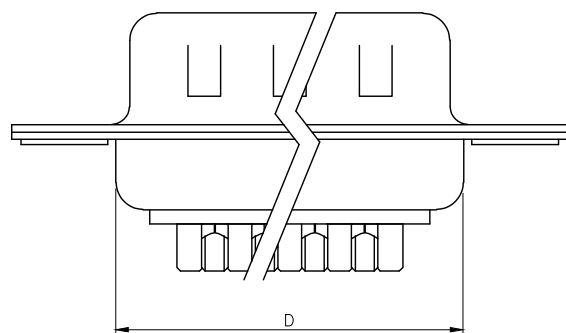

NUMBER OF POSITIONS	DIMENSION			
	A±0.25	B±0.13	C±0.38	D±0.25
9	18.00	24.99	30.80	19.28
15	26.50	33.32	39.20	27.50
25	40.00	47.04	53.05	41.28
37	56.60	63.50	69.40	57.70

铆合方式	TYPE-1:铆合	TYPE-2:前铆实心螺母	TYPE-3:后铆空心螺母	TYPE-4:后铆空心螺母锁螺丝
图示				

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAUCES	

XKLB 星城
Connection

DESIGN	阿树	VIEW: 	MODEL TYPE: D-SUB		
CHECKED		UNIT: mm/in	PART NO.: X0109WT12B1L		
APPROVED		SIZE: A4	DWG NO.: X-X0109WT12B1L		
PRECISION CO., LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1

1