

## 规格承认书

### Specification For Approval

客户名称:

(Customer Name)

产品名称:

电解电容

(Product Name)

Aluminum Electrolytic Capacitor

客户料号:

(Customer part number)

科尼盛料号:

DHG250M686L260S1AA

(KNSCHA number)

型号规格:

E/C 250V/68 $\mu$ F 13\*26mm 105°C KNSCHA SHG 5000H  
P:5.0mm  $\pm$ 20% 咖啡白字

(Specifications)

日期:

2025.7.14

DATE

|                    |                 |
|--------------------|-----------------|
| 制 造<br>Manufacture |                 |
| 核 准<br>APPROVAL    | 制 作<br>PREPARED |
| 王帅                 | 陆美秀             |

|                            |                |                 |
|----------------------------|----------------|-----------------|
| 客户承认栏<br>CUSTOMER APPROVED |                |                 |
| 核 准<br>APPROVED            | 确 认<br>CHECKED | 经 办<br>DESIGNED |
|                            |                |                 |

**广东科尼盛电子科技有限公司**

KNSCHA ELECTRONICS CO., LIMITED.

No. 8th floor, A3 building, R&D center (Phase I),

Songshan Lake Intelligent Valley, Liaobu Town, Dongguan City.

TEL: 0769-83698067 81035570 FAX: 0769-83861559

Email: sales@knscha.com Website: <http://www.knscha.com>



广东科尼盛电子科技有限公司

KNSCHA ELECTRONICS CO.,LIMITED

一、部品规格特征表

| NO | Series | CAP<br>(μF) | WV<br>(V. DC) | Size<br>(mm) | CAP<br>% | Operating<br>Temperature<br>Range (℃) | DF%<br>(120Hz<br>25℃) | LC<br>(3min)<br>(uA) | ESR(Ω, MAX<br>25℃<br>/100KHz) | Max Ripple<br>Curent<br>(mA@105℃<br>/100KHz) | 寿命 (H) |
|----|--------|-------------|---------------|--------------|----------|---------------------------------------|-----------------------|----------------------|-------------------------------|----------------------------------------------|--------|
| 1  | SHG    | 68          | 250           | 13*26        | ±20      | -25~105                               | 15                    | 510                  | /                             | 935                                          | 5000   |
|    |        |             |               |              |          |                                       |                       |                      |                               |                                              |        |
|    |        |             |               |              |          |                                       |                       |                      |                               |                                              |        |

注明：无卤产品

1. 适用标准(TEST STANDARD):

- JIS C 5141 - 1991 电子机器用固定非固体电解质电解电容器
- JIS C 5102 电子机器用固定电容器试验方法
- GB 5993-91 电子设备用固定电容器 第四部分：分规范：固体和非固体电解质铝电容器

2. 适用范围（Adapt Range）：

本产品规格书适用于广东科尼盛电子科技有限公司铝电解电容器。  
This product specification is adapted to Aluminum Electrolytic Capacitors produced by KNSCHA ELECTRONICS CO.,LIMITED.

3. 使用温度范围(Operating Temperature Range):

6.3~100WV: -40~+105℃    160~450WV: -25~+105℃

4. 浪涌电压(Surge Voltage):

|               |     |    |    |    |    |    |    |     |     |     |     |     |     |     |
|---------------|-----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|
| 工作电压（V）       | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | 160 | 200 | 250 | 350 | 400 | 450 |
| Rated voltage |     |    |    |    |    |    |    |     |     |     |     |     |     |     |
| 浪涌电压（V）       | 8   | 13 | 20 | 32 | 44 | 63 | 79 | 125 | 200 | 250 | 300 | 400 | 450 | 500 |
| Surge voltage |     |    |    |    |    |    |    |     |     |     |     |     |     |     |

5. 损耗(Dissipation Factor): (25℃,120Hz)

|                |     |    |    |    |    |    |    |     |     |     |     |     |     |     |
|----------------|-----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|
| 工作电压（V）        | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | 160 | 200 | 250 | 350 | 400 | 450 |
| Rated voltage  |     |    |    |    |    |    |    |     |     |     |     |     |     |     |
| 损耗角正切值         | 22  | 20 | 16 | 14 | 12 | 10 | 9  | 8   | 15  | 15  | 15  | 20  | 20  | 20  |
| D.F.(Tan%) Max |     |    |    |    |    |    |    |     |     |     |     |     |     |     |

注：当标准容量每大于1000 μ F时，每增加1000 μ F损失角正切值相应增加2%。

6. 漏电流(DC Leakage Current)

施加额定电压3分钟后测试 （After 3 minutes application of rated working voltage）  
6.3 ~ 100WV I≤0.01CV 或3.0(μA) ，（at 25℃）  
160 ~ 450WV I≤0.03CV(μA) ，（at 25℃）


7. 胶管标识示意图(Marking):

|                                                                                     |         |
|-------------------------------------------------------------------------------------|---------|
| 250V                                                                                |         |
| 68 μ F                                                                              | ..... 2 |
|  | ..... 3 |
| KNSCHA                                                                              | ..... 1 |
| SHG                                                                                 | ..... 4 |
| (M) 105℃                                                                            | ..... 5 |

NO. 代表内容 Item

- 1 科尼盛公司商标(Logo)
- 2 电容器规格（额定电压和容量）Capacitance and Rated Vlotage
- 3 负极表示带 Polarity bar
- 4 产品系列(Series)
- 5 容量范围与工作最高温度(Capacitance Tolerance and Operating Temperature Range )

8. 外形图（Dimensions）：

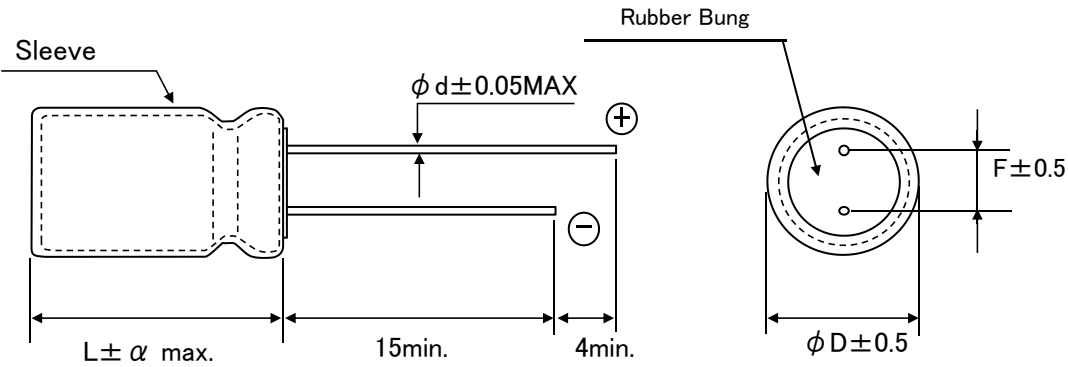

| $\Phi D$ | F   | $\alpha$ | $\Phi d$ |
|----------|-----|----------|----------|
| 5        | 2   | 1.5      | 0.5      |
| 6.3      | 2.5 | 1.5      | 0.5      |
| 8        | 3.5 | 1.5      | 0.5      |
| 10       | 5   | 1.5      | 0.6      |
| 13       | 5   | 1.5      | 0.6      |
| 16       | 7.5 | 2        | 0.8      |
| 18       | 7.5 | 2        | 0.8      |

9. 纹波电流系数（Multiplier for ripple current）：

频率系数 Frequency Coefficients


| Frequency<br>(HZ)<br>CAP(μF) | 50/60 | 100/120 | 1K   | 10K  | 100K |
|------------------------------|-------|---------|------|------|------|
| CAP ≤ 330                    | 0.35  | 0.5     | 0.75 | 0.85 | 1    |
| 330 ≤ CAP ≤ 1500             | 0.45  | 0.65    | 0.85 | 0.90 | 1    |
| CAP ≥ 1500                   | 0.53  | 0.75    | 0.90 | 0.95 | 1    |

温度系数 temperature coefficients

| Temperature(°C) | ≤50 | 65   | 75   | 85  | 95  | 105 |
|-----------------|-----|------|------|-----|-----|-----|
| Multiplier      | 1.9 | 1.75 | 1.57 | 1.4 | 1.2 | 1.0 |


10. 构造图及材料表 (Frame drawing and Material list):


10.1、构造图(Frame drawing)

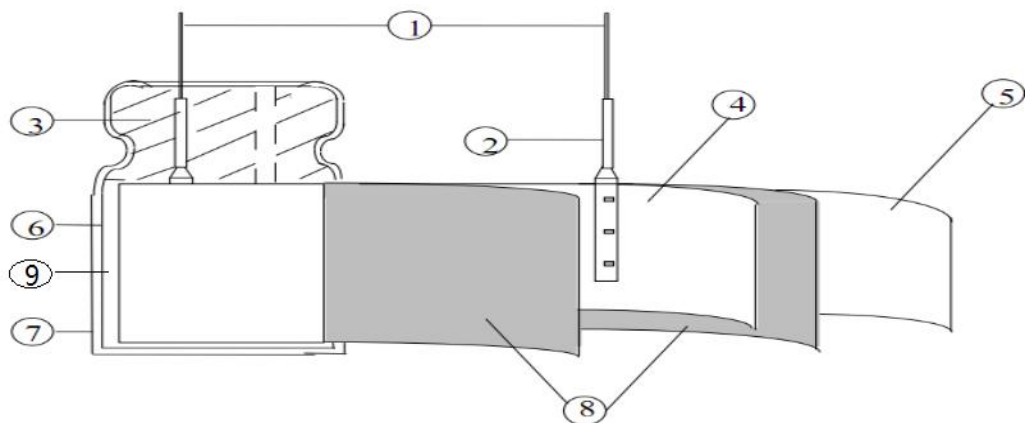

10.2、材料表 (Material table)

| NO. | 构成部件<br>Component            | 材质<br>Material                          | 备注<br>remarks |
|-----|------------------------------|-----------------------------------------|---------------|
| 1   | 引出线<br>Lead line             | 铝+CP线<br>Aluminum + Cpwire              |               |
| 2   | 端子<br>Terminal               | 铝<br>Aluminum wire                      |               |
| 3   | 胶塞<br>Rubber                 | 合成橡胶<br>Synthetic rubber                |               |
| 4   | 正极箔<br>Al Foil(+)            | 铝<br>Aluminum                           |               |
| 5   | 负极箔<br>Al Foil(-)            | 铝<br>Aluminum                           |               |
| 6   | 铝壳<br>Case                   | 铝<br>Aluminum case                      |               |
| 7   | 套管<br>Sleeve                 | PET                                     |               |
| 8   | 电解纸<br>Separator             | 电解电容器纸<br>Electrolytic capacitors paper |               |
| 9   | 工作电解液<br>Working electrolyte | 乙二醇等<br>Ethanediol                      |               |
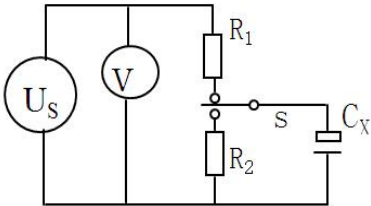
| NO   | 项 目<br>Items                                        | 条 件<br>Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 规 格<br>Specifications                                                                                                                                                      |
|------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11.1 | 最大允许纹波电流<br>Maximum permissible ripple current      | 温度 Temperature: $105\pm 2^{\circ}\text{C}$<br>纹波:100KHz正弦交流实际电流值+交流电压峰值 $\leq$ 标准电压<br>Ripple frequency:<br>The maximum sinusoidal alternating current of a frequency specified below at which the capacitor can be operated continuously, Where DC.Voltage+peak ripple voltage $\leq$ Rated voltage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Refer to table                                                                                                                                                             |
| 11.2 | 浪涌电压<br>Surge Voltage                               | 在下面规定的温度下, 通过指定的浪涌电压, 6.0分钟 (充电30秒, 放电5分30秒) 为一循环, 往返1000回合, 常温常湿下放置1-2小时达到热平衡状态测定满足。<br>The capacitor shall be subjected to 1000 cycles at a temperature specified below, each consisting of a charge period of $30\pm 5\text{s}$ , followed by a discharge period of approx 5min.30s. And the capacitor shall be stored 1-2hours under standard atmospheric conditions to obtain thermal stability, after which measurement shall be made.<br>应加电压: 见4项<br>Test voltage: see 4<br>温度: $15\sim 30^{\circ}\text{C}$<br>Test Temperature: $15\sim 30^{\circ}\text{C}$<br>测试回路 Measurement circuit<br> R1:串联保护电阻 ( $1\text{k}\Omega$ )<br>Protective series resistor ( $1\text{k}\Omega$ )<br>V:直流电压表 DC Voltage<br>R2:放电电阻 Discharge resistor ( $1\text{k}\Omega$ )<br>S:切换开关 Switch<br>Cx:待测电容器 Test Capacitor | 漏电流: 不超过规定值<br>Leakage Current: Not more than the specified value<br>容量变化: 初始值的 $\pm 15\%$ 以内<br>Capacitance change: Within $\pm 15\%$ of the initial value<br>损失角: 不超过规定值 |
| 11.3 | 静电容量<br>(允许偏差)<br>Capacitance (Tolerance)           | 测试频率: 120Hz<br>Measuring frequency: 120Hz<br>测试电压: 0.5Vrms or less<br>measuring voltage: 0.5Vrms or less<br>DC bias voltage: $+1.5\sim 2.0\text{ V DC}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 静电容量允许偏差, $+20\%-20\%$<br>Capacitance tolerance $+20\%-20\%$                                                                                                               |
| 11.4 | 损耗角正切值<br>( $\text{tg}\delta$ )<br>Tangent of angle | 测试条件与静电容量相同<br>Measurement shall be made under the same conditions as those given for the measurement of capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 见5项<br>Refer to table 5.                                                                                                                                                   |
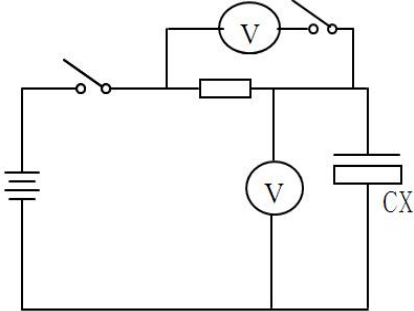
| NO   | 项 目<br>Items           | 条 件<br>Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 规 格<br>Specifications            |
|------|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| 11.5 | 漏电流<br>Leakage Current | <p>电容器接<math>1000\pm 10\Omega</math>的保护电阻施加电压1分钟后的测试电流。</p> <p>The rated voltage shall be applied across the capacitor and its protective resistor which shall be <math>1000\pm 10\Omega</math>. The leakage Current shall then be measured after an electrication period of 1min. The leakage current shall be calculated by the following equation.</p> <p>漏电流： <math>(I) = E/R_s</math></p> <p>Leakage current:</p> <p>E:直流电压表的电压值<br/>Voltage measured with DC voltmeter</p> <p><math>R_s</math>:标准电阻的电阻值<br/>Resistance of the protective resistor</p> <p>测定电路 measurement circuit</p>  <p>电压将下法 (voltage drop method)</p> <p><math>R_s</math>:标准电阻的电阻值 (<math>1000\pm 100\Omega</math>)<br/>protective resistor</p> <p>直流电压表或电子电压表<br/>DC voltmeter or electronic voltmeter</p> <p>S1:开关 switch</p> <p>S2:电压表保护用变换开关<br/>protective switch for a voltmeter</p> <p>CX:待测电容器 test capacitor</p> | <p>见6项<br/>Refer to table 6.</p> |

| NO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 项 目<br>Items                                              | 条 件<br>Conditions                                                                                                                                                                                                                                                                                                                                 |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------------------------------|------------------------------|--------------|--------------------------------------------|----------------------------------------|------------------------|--------------------------------------------------|---------|---|-------|-------|---|------|---------|---|-------|-------|
| 11.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 高低温特性<br>Characteristic<br>at High and low<br>temperature | 电容器根据下表的次序处理<br><br>The capacitor shall subjected in turn to the procedures specified below.                                                                                                                                                                                                                                                      |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | <table><tr><td>阶 段<br/>Step</td><td>温 度<br/>Temperature</td><td>时 间<br/>Times</td></tr><tr><td>1</td><td>20±2℃</td><td>热平衡状态</td></tr><tr><td>2</td><td>-40(-25)℃</td><td>*2hours</td></tr><tr><td>3</td><td>20±2℃</td><td>热平衡状态</td></tr><tr><td>4</td><td>105℃</td><td>*2hours</td></tr><tr><td>5</td><td>20±2℃</td><td>热平衡状态</td></tr></table> | 阶 段<br>Step               | 温 度<br>Temperature                         | 时 间<br>Times                 | 1            | 20±2℃                                      | 热平衡状态                                  | 2                      | -40(-25)℃                                        | *2hours | 3 | 20±2℃ | 热平衡状态 | 4 | 105℃ | *2hours | 5 | 20±2℃ | 热平衡状态 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | 阶 段<br>Step                                                                                                                                                                                                                                                                                                                                       | 温 度<br>Temperature        | 时 间<br>Times                               |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | 1                                                                                                                                                                                                                                                                                                                                                 | 20±2℃                     | 热平衡状态                                      |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | 2                                                                                                                                                                                                                                                                                                                                                 | -40(-25)℃                 | *2hours                                    |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | 3                                                                                                                                                                                                                                                                                                                                                 | 20±2℃                     | 热平衡状态                                      |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | 4                                                                                                                                                                                                                                                                                                                                                 | 105℃                      | *2hours                                    |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | 5                                                                                                                                                                                                                                                                                                                                                 | 20±2℃                     | 热平衡状态                                      |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | * 电容器放置在每一温度下，待阻抗或电容量稳定后方可测试。                                                                                                                                                                                                                                                                                                                     |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | * The capacitor should be stored at rech temperature until measured temperature impedance or capacitance are stabilized.                                                                                                                                                                                                                          |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| <table><tr><td rowspan="2">阶段2<br/>Step2</td><td>阻抗比（对阶段1）<br/>Impedance ratio</td><td>见9.10项<br/>refer to No9.10</td></tr><tr><td>静电容量变化率<br/>（对阶段1）<br/>change in capacitance</td><td>静电-20～+20%<br/>within-20～+20%</td></tr><tr><td rowspan="2">阶段4<br/>Step4</td><td>静电容量变化率<br/>（对阶段1）<br/>change in capacitance</td><td>静电-20～+20%<br/>within-20～+20% of step 1</td></tr><tr><td>漏电流<br/>Leakage Current</td><td>规定值5倍以下<br/>Less than 500% of the specified value</td></tr></table> | 阶段2<br>Step2                                              | 阻抗比（对阶段1）<br>Impedance ratio                                                                                                                                                                                                                                                                                                                      | 见9.10项<br>refer to No9.10 | 静电容量变化率<br>（对阶段1）<br>change in capacitance | 静电-20～+20%<br>within-20～+20% | 阶段4<br>Step4 | 静电容量变化率<br>（对阶段1）<br>change in capacitance | 静电-20～+20%<br>within-20～+20% of step 1 | 漏电流<br>Leakage Current | 规定值5倍以下<br>Less than 500% of the specified value |         |   |       |       |   |      |         |   |       |       |
| 阶段2<br>Step2                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                           | 阻抗比（对阶段1）<br>Impedance ratio                                                                                                                                                                                                                                                                                                                      | 见9.10项<br>refer to No9.10 |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 静电容量变化率<br>（对阶段1）<br>change in capacitance                | 静电-20～+20%<br>within-20～+20%                                                                                                                                                                                                                                                                                                                      |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| 阶段4<br>Step4                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 静电容量变化率<br>（对阶段1）<br>change in capacitance                | 静电-20～+20%<br>within-20～+20% of step 1                                                                                                                                                                                                                                                                                                            |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 漏电流<br>Leakage Current                                    | 规定值5倍以下<br>Less than 500% of the specified value                                                                                                                                                                                                                                                                                                  |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| 阶段1：测定容量，损耗和阻抗值。                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                           |                                                                                                                                                                                                                                                                                                                                                   |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| Step1:Capacitance,Dissipation Factor and impedance shall be measured.                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                           |                                                                                                                                                                                                                                                                                                                                                   |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| 阶段2：放置2小时后，达到热平衡状态再测。                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                           |                                                                                                                                                                                                                                                                                                                                                   |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| Step2:After the capacitor being stored for 2 hours,capacitance, Dissipation Factor and impedance shall be Measured.The measurement shall be made at thermal stability.                                                                                                                                                                                                                                                                                                                     |                                                           |                                                                                                                                                                                                                                                                                                                                                   |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| 阶段4：放置2小时后，达到热平衡状态测测。                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                           |                                                                                                                                                                                                                                                                                                                                                   |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |
| Setp4:After the capacitor being stored for 2 hours,Capacitance, Dissipation Factor and impedance shall be Measured.The measurement shall be made at thermal stability.                                                                                                                                                                                                                                                                                                                     |                                                           |                                                                                                                                                                                                                                                                                                                                                   |                           |                                            |                              |              |                                            |                                        |                        |                                                  |         |   |       |       |   |      |         |   |       |       |



| NO               | 项 目<br>Items            | 条 件<br>Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 规格              |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
|------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|-------|-----------|------------|---------|--------------|-------|----------------|--------|------------------|-----------|-----------|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Specifications  |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
| 11.7             | 压力释放<br>Pressure relief | <p>一、交流试验 A.C.test</p> <p>施加电压值：Applied voltage</p> <p>交流电压不超过0.7倍的额定直流电压或250VAC以下</p> <p>A.C.voltage not exceeding 0.7times the rated</p> <p>Direct voltage or 250V AC whichever is</p> <p>the lower.</p> <p>频率：Frequency:50Hz或60Hz</p> <p>串联电阻参照下表 Series resistor refer to</p> <p>the table below.</p> <table><tr><td>Capacitance</td><td>Series resistor</td></tr><tr><td>C≤1μF</td><td>1000±100Ω</td></tr><tr><td>1μF&lt;C≤10μF</td><td>100±10Ω</td></tr><tr><td>10μF&lt;C≤100μF</td><td>10±1Ω</td></tr><tr><td>100μF&lt;C≤1000μF</td><td>1±0.1Ω</td></tr><tr><td>1000μF&lt;C≤10000μF</td><td>0.1±0.01Ω</td></tr><tr><td>10000μF&lt;C</td><td>/</td></tr></table> <p>*电阻相当于试验频率阻抗的1/2</p> <p>Resistance is equivalent to a half of</p> <p>Impedance by test frequency.</p> <p>二、直流试验 D.C.test</p> <p>施加同额定电压相等的反向电压。</p> <p>Reversed polarity D.C.rated voltage shall</p> <p>be applied to the capacitor.</p> <p>注：1、该规定适用于铝壳直径6mm以上的电容器。</p> <p>2、试验开始30Min后。防爆装置不动作时，</p> <p>停止试验。</p> <p>Note:</p> <p>1.This requirement applies to capacitors</p> <p>with a diameter of 6mm or more.</p> <p>2.When the pressure relief device dose</p> <p>not open even 30minutes after commencement</p> <p>of this test,the test may be ended.</p> | Capacitance     | Series resistor | C≤1μF | 1000±100Ω | 1μF<C≤10μF | 100±10Ω | 10μF<C≤100μF | 10±1Ω | 100μF<C≤1000μF | 1±0.1Ω | 1000μF<C≤10000μF | 0.1±0.01Ω | 10000μF<C | / | <p>防爆装置打开时，无</p> <p>燃烧、无爆炸或铝壳</p> <p>和封口材料的分离。</p> <p>The pressure relief</p> <p>device shall open in</p> <p>such a way as to avoid</p> <p>any danger of fire or</p> <p>explosion of Capacitor</p> <p>elements.</p> |
|                  |                         | Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Series resistor |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
| C≤1μF            | 1000±100Ω               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
| 1μF<C≤10μF       | 100±10Ω                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
| 10μF<C≤100μF     | 10±1Ω                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
| 100μF<C≤1000μF   | 1±0.1Ω                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
| 1000μF<C≤10000μF | 0.1±0.01Ω               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |
| 10000μF<C        | /                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                 |                 |       |           |            |         |              |       |                |        |                  |           |           |   |                                                                                                                                                                                                                     |

| NO    | 项 目<br>Items         | 条 件<br>Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 规 格<br>Specifications                                                                                                                                                                                                         |
|-------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11.8  | 高温负荷<br>Load life    | <p>在105±2℃的恒温箱内，电容器施加最大允许纹波电流，施加直流电压和交流电压的峰值的和要等于额定电压，时间 5000+24 小时，试验结束后，在标准状态下放置16小时候进行测试。</p> <p>The capacitor shall be placed in a circulating air oven at an ambient temperature of 105±2℃. It must not be subjected to direct radiation from heating elements. DC voltage and the rated ripple current shown in table shall be applied for a period of 5000 +24 hours, The sum of the DC voltage and peak AC voltage must not exceed the full rated voltage of the capacitor. It shall be subjected to standard atmospheric for 16 hours, after which measurement shall be made.</p> | <p>漏电流：不超过规定值<br/>Leakage current: ≤ Initial specified value</p> <p>容量变化率：初测值的±20%以内<br/>Capacitance change: within ±20% of Initial value</p> <p>损耗角正切：不超过规定值的2倍<br/>Dissipation factor: ≤200% of initial specified value</p> |
| 11.9  | 高温储存<br>Shelf life   | <p>温度 Temp: 105±2℃<br/>时间 Time: 1000+36小时<br/>电压处理：在常温下电容器串联保护电阻（1KΩ），加额定施加额定电压30分钟後在放电，常温放置24-48小时后测量</p> <p>Condition: The DC rated voltage shall be applied across the capacitor and its protective resistor (1kΩ) for 1 minutes, The capacitor shall then be stored under standard Atmospheric Conditions for 24-48 hours.</p> <p>漏电流：施加额定电压一分钟，常温下测试，I≤2倍的规定值。<br/>Leakage current: rated voltage for one minute I ≤ applied the provisions of twice the value of</p>                                                                                                                 | <p>漏电流：施加额定电压一分钟 I ≤ 2倍的规定值。</p> <p>容量变化率：初测值的±20%以内<br/>Capacitance change: within ±20% of Initial value</p> <p>损耗角正切：不超过规定值的2倍<br/>Dissipation factor: ≤200% of initial specified value</p>                                 |
| 11.10 | 可焊性<br>Solderability | <p>浸渍时间<br/>Solder presstime: 2±0.5s<br/>焊接温度<br/>Solder temperature: 235±5℃</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <p>浸渍面积90%以上附着<br/>At least 90% of Circumferential surface of the dipped portion of termination shall be covered with new solder</p>                                                                                          |

| NO    | 项 目<br>Items                            | 条 件<br>Conditions                                                                                                                                                                                                                                                                                                                                     | 规 格<br>Specifications                                                                                                                                                                                                                                                                         |
|-------|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11.11 | 耐焊接热<br>Resistance to<br>soldering heat | 温度: 350±10℃<br>Test Temperature:350±10℃<br>时间: 3.5±0.5s<br>Test time:3.5±0.5s                                                                                                                                                                                                                                                                         | 漏电流: 不超过规定值<br>Leakage current: Not more<br>than the specified value<br>电容量变化: 初测值的±10%以内<br>Capacitance Change :<br>within±10% of the<br>initial value<br>损耗角正切: 不超过规定值<br>Dissipation Factor: Not More<br>than the specified value<br>外观: 无明显异常<br>Appearance: No remarkable<br>abnormality |
| 11.12 | 耐湿性<br>Resistance of<br>damp heat       | 温度: 40±2℃<br>Test Temperature:40±2℃<br>湿度: 90-95%Rh<br>Relative Humidity:90-95%Rh<br>时间: 240±8hrs<br>Test time:240±8hrs<br>试验后常温放置24-48小时<br>To expose in the atmospheric<br>condition for 24to 48 hours<br>after completion of test                                                                                                                  | 漏电流: 不超过规定值<br>Leakage current: Not more<br>than the specified value<br>电容量变化: 初测值的±10%以内<br>Capacitance Change :<br>within±10% of the<br>initial value<br>损耗角正切: 不超过规定值<br>Dissipation Factor: Not More<br>than the specified value<br>外观: 无明显异常<br>Appearance: No remarkable<br>abnormality |
| 11.13 | 耐振性<br>Resistance to<br>vibration       | 频率: 10-55-10Hz/分<br>Frequency: From 10 to 55 Hz and<br>return to 10 Hz,shall be transferred<br>in 1 Min Total Amplitude:1.5mm<br><br>条件: X.Y.Z 方向各2小时<br>Direction and duration of vibration :<br>3 orthogonal directions mutually<br>each for 2 hours Total 6 hours.<br><br>静电容量变化: 初始值的±5%以内<br>Capacitance change: Within ±5% of the initial value | 静电容量测试时无接触不良, 断线及短路, 端子无机械损伤。<br>Capacitance:During the<br>test,measured value to<br>be stabilized(when<br>measured several times<br>within 30 min before<br>completion of test)<br>Appearance:No<br>remarkable abnormality<br><br>外观: 无明显异常<br>Appearance: No remarkable<br>abnormality      |

| NO    | 项 目<br>Items                                                                                        | 条 件<br>Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 规 格<br>Specifications                                |  |             |          |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|-------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|--|-------------|----------|----------------|-------------|---------|----------------|-----------|----------|------|-----|-----------|---|---------|-----------|----|-------------|----|------------|--|--|----|-----|-----|-------------|---------|-------------|-----------|----------|------|-----|-----------|-----|--------|-----------|---|--------|-------------|----|-------|
| 11.14 | 耐溶剂性<br>Resisting<br>Solvent                                                                        | 溶剂：异丙醇<br>Solvent:Isopropylalcohol<br>温度：20-25℃<br>Temperature:20-25℃<br>时间：30±5s<br>Time:30±5s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 外观：无明显异常<br>Appearance: No remarkable<br>abnormality |  |             |          |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
| 11.15 | 端子强度<br>Terminal<br>Strength<br>拉伸度<br>Tensile<br>test<br>intensity<br>弯曲强度<br>winding<br>intensity | <table><tr><td>线径</td><td>拉伸力</td><td>维持时间</td></tr><tr><td>Diameter of</td><td>Tensile</td><td rowspan="3">continued time</td></tr><tr><td>terminnal</td><td>Strength</td></tr><tr><td>(mm)</td><td>(N)</td></tr><tr><td>0.3&lt;d≤0.5</td><td>5</td><td rowspan="3">10±1sec</td></tr><tr><td>0.5&lt;d≤0.8</td><td>10</td></tr><tr><td>0.5&lt;d≤1. 25</td><td>20</td></tr><tr><td colspan="3">2回合 2bends</td></tr><tr><td>线径</td><td>弯曲力</td><td>锥质量</td></tr><tr><td>Diameter of</td><td>Tensile</td><td rowspan="3">Awl quality</td></tr><tr><td>terminnal</td><td>Strength</td></tr><tr><td>(mm)</td><td>(N)</td></tr><tr><td>0.3&lt;d≤0.5</td><td>2.5</td><td>0.75kg</td></tr><tr><td>0.5&lt;d≤0.8</td><td>5</td><td>0.51kg</td></tr><tr><td>0.5&lt;d≤1. 25</td><td>10</td><td>1.0kg</td></tr></table> |                                                      |  | 线径          | 拉伸力      | 维持时间           | Diameter of | Tensile | continued time | terminnal | Strength | (mm) | (N) | 0.3<d≤0.5 | 5 | 10±1sec | 0.5<d≤0.8 | 10 | 0.5<d≤1. 25 | 20 | 2回合 2bends |  |  | 线径 | 弯曲力 | 锥质量 | Diameter of | Tensile | Awl quality | terminnal | Strength | (mm) | (N) | 0.3<d≤0.5 | 2.5 | 0.75kg | 0.5<d≤0.8 | 5 | 0.51kg | 0.5<d≤1. 25 | 10 | 1.0kg |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 线径          | 拉伸力      | 维持时间           |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | Diameter of | Tensile  | continued time |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | terminnal   | Strength |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | (mm)        | (N)      |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 0.3<d≤0.5   | 5        | 10±1sec        |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 0.5<d≤0.8   | 10       |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 0.5<d≤1. 25 | 20       |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 2回合 2bends  |          |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 线径          | 弯曲力      | 锥质量            |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | Diameter of | Tensile  | Awl quality    |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | terminnal   | Strength |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | (mm)        | (N)      |                |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 0.3<d≤0.5   | 2.5      | 0.75kg         |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 0.5<d≤0.8   | 5        | 0.51kg         |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |
|       |                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                      |  | 0.5<d≤1. 25 | 10       | 1.0kg          |             |         |                |           |          |      |     |           |   |         |           |    |             |    |            |  |  |    |     |     |             |         |             |           |          |      |     |           |     |        |           |   |        |             |    |       |

**STANDARD NUMBER**

|   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| D | X | Z | 1 | 0 | 0 | M | 2 | 2 | 7  | H  | 2  | 0  | 0  | S  | 1  | A  | A  |

| 电<br>容<br>总<br>类<br>别 |      | 系列     | 电压      |      | 容差      |       | 容量          |      | φ别        |      | 高度     |      | 套管颜色   |      | 加工           |                | 电气特性                       |          | 印刷特殊           |      |
|-----------------------|------|--------|---------|------|---------|-------|-------------|------|-----------|------|--------|------|--------|------|--------------|----------------|----------------------------|----------|----------------|------|
| ↓                     |      | ↓      | ↓       |      | ↓       |       | ↓           |      | ↓         |      | ↓      |      | ↓      |      | ↓            |                | ↓                          |          | ↓              |      |
| 1                     |      | 2,3    | 4, 5, 6 |      | 7       |       | 8, 9, 10    |      | 11        |      | 12, 13 |      | 14     |      | 15,16        |                | 17                         |          | 18             |      |
| classification        |      | Series | Voltage |      | cap tol |       | Capacitance |      | dimension |      |        |      | Sleeve |      | Diameter (Φ) |                | Electrical characteristics |          | SleeveMaterial |      |
| Category              | Code |        | Voltage | Code | cap tol | Code  | CAP(uF)     | Code | Φ         | Code | Height | Code | Color  | Code | process      | Code           |                            | Code     |                | Code |
| 导针型                   | D    | KFL    | 4       | 004  | ±5      | J     | 0.1         | 104  | 3         | A    | 05     | 05   | 咖啡白字   | 0    | 长脚           | S1             | 标准值                        | A        | 标准印刷           | A    |
| 牛角型                   | L    | KFN    | 6.3     | 6R3  | ±10     | K     | 0.22        | 224  | 4         | B    | 07     | 07   | 咖啡金字   | 1    | 直切           | C0             | DF特殊                       | B        |                |      |
| 固态型                   | G    | KSS    | 10      | 010  | ±15     | L     | 0.33        | 334  | 5         | C    | 09     | 09   | 咖啡银字   | 2    |              |                | ESR特殊                      | C        |                |      |
| 贴片型                   | T    | KSL    | 16      | 016  | ±20     | M     | 1           | 105  | 6         | D    | 11     | 11   | 黑体银字   | 3    | 成型<br>截断     | F0             | IMPEDANCE特殊                | D        | 周管控            | B    |
| 超电型                   | C    | KSE    | 25      | 025  | -10     | U     | 2.2         | 225  | 6.3       | E    | 12     | 12   | 黑体白字   | 4    |              |                | R.C特殊                      | E        |                |      |
| 锂电型                   | B    | KSN    | 35      | 035  | +20     |       | P           | 3.3  | 335       | 7    | F      | 14   | 14     | 黑体红金 | 5            | 垂直<br>弯曲<br>截断 | V0                         | LC特殊     | F              | 代理工厂 |
| 固液型                   | P    | KNS    | 50      | 050  | -10     | S     |             | 4.7  | 475       | 8    | G      | 15   | 15     | 黑体青金 | 6            |                |                            | 成型<br>截断 | Z0             |      |
| 螺栓型                   | S    | KNG    | 63      | 063  | +30     |       | Y           | 10   | 106       | 12   | J      | 20   | 20     | 白体黑字 | 8            | 直编             | T1                         |          |                |      |
|                       |      | KLS    | 80      | 080  | -10     | Q     |             | 15   | 156       | 12.5 | K      | 25   | 25     | 白体银字 | 9            |                |                            |          |                |      |
|                       |      | KGA    | 100     | 100  | +50     |       | 22          | 226  | 13        | L    | 30     | 30   | 墨绿白字   | A    |              |                |                            |          |                |      |
|                       |      | KGR    | 160     | 160  | +80     | 100   | 107         | 16   | M         | 35   | 35     | 墨绿青金 | B      |      |              |                |                            |          |                |      |
|                       |      | KXC    | 200     | 200  | 0       | 120   | 127         | 18   | N         | 40   | 40     | 紫色银字 | C      |      |              |                |                            |          |                |      |
|                       |      | KXB    | 250     | 250  | +20     | 150   | 157         | 20   | P         | 45   | 45     | 紫体白字 | D      |      |              |                |                            |          |                |      |
|                       |      | KXD    | 315     | 315  |         | 220   | 227         | 22   | Q         | 50   | 50     | 宝蓝金字 | E      |      |              |                |                            |          |                |      |
|                       |      | KXE    | 330     | 330  |         | 470   | 477         | 25   | R         | 11.5 | 1B     | 天蓝白字 | F      |      |              |                |                            |          |                |      |
|                       |      | KXF    | 350     | 350  |         | 1000  | 108         | 30   | S         | 12.5 | 1C     | 深蓝白字 | G      |      |              |                |                            |          |                |      |
|                       |      | KXL    | 400     | 400  |         | 1200  | 128         | 35   | T         | 16.5 | 1G     | 天蓝黑字 | H      |      |              |                |                            |          |                |      |
|                       |      | KFW    | 420     | 420  |         | 1500  | 158         | 40   | U         | 17.5 | 1H     | 深蓝黑字 | J      |      |              |                |                            |          |                |      |
|                       |      | KSW    | 450     | 450  |         | 10000 | 109         | 45   | V         | 31.5 | 3B     | 蓝色银字 | K      |      |              |                |                            |          |                |      |
|                       |      | KXJ    | 500     | 500  |         | 15000 | 159         | 51   | W         |      |        | 裸品   | Z      |      |              |                |                            |          |                |      |
|                       |      | KXK    | 550     | 550  |         | 22000 | 229         |      |           |      |        | 天蓝银字 | I      |      |              |                |                            |          |                |      |
|                       |      | KXW    | 600     | 600  |         | 33000 | 339         |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      | KXZ    |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      | KSZ    |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      | KSM    |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      | KSB    |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      | SHG    |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
|                       |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |
| </                    |      |        |         |      |         |       |             |      |           |      |        |      |        |      |              |                |                            |          |                |      |