

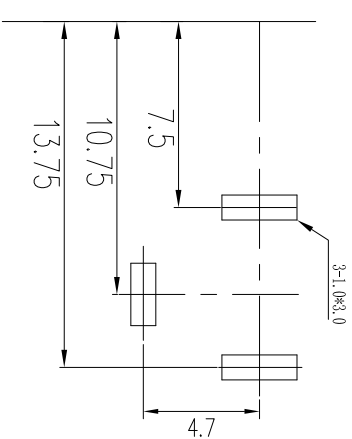
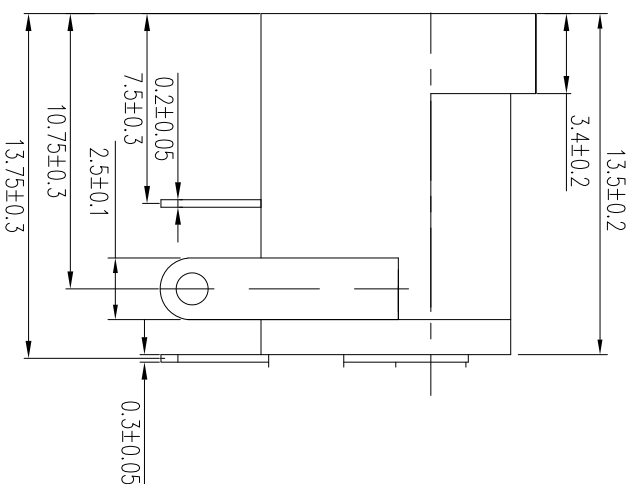


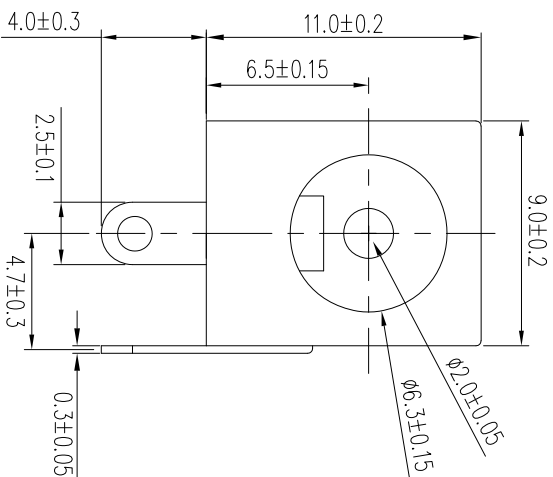


TECHNICAL FEATURES

- 1.OPERATING TEMPERATURE: -25 TO 70°C
- 2.RAIED ELECTRONEGATIVITY: DC 30V 1.0A
- 3.CONTACT RESISTANCE: $\leq 30\text{ m}\Omega$
- 4.INSULATION RESISTANCE: $\geq 100\text{M}\Omega$
- 5.WITHSTAND VOLTAGE: AC500V (50HZ) /min
- 6.INSERTION AND EXTRACTION FORCE: 3-25N
- 7.LIFESPAN: 5,000 TIMES



6	REAR COVER	1PCS	PBT/PBA/PA46	BLACK
5	BASE SEAT	1PCS	PBT/PBA/PA46	BLACK
4	INSERT A NEEDLE	1PCS	IRON SHEET	NI PLATING
3	BULLET PIECE	1PCS	MANGANESE STEEL	Sn PLATING
2	CURVED SHEET	1PCS	IRON SHEET	Sn PLATING
1	FLAT PLATE	1PCS	IRON SHEET	Sn PLATING
NO	NAME	Q'TY	MATERIALS	REMARKS

TOLERANCE UNLESS OTHERWISE SPEC	SHENZHEN FUGANG TECHNOLOGY CO.,LTD
------------------------------------	------------------------------------

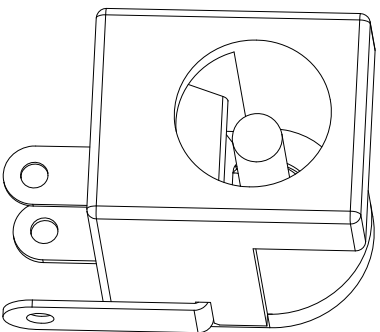

PCB HOLES(TOP VIEW)

GENERAL TOLERANCE: $\pm 0.05\text{mm}$

	TOLERANCE	TITLE:DC SOCKET					
BASIC DIMENSION		DSND	W Z Z	25.12.13			
x.x	+0.30	CHKD	L P J	25.12.13	PART NO:FG-DC-005-2.0		
x.xx	+0.20						
x.xxx	+0.10	APVD	L Z W	25.12.13			
ANGLES	±3°			UNIT:mm	SCALE:1:1	SIZE:A4	SHEET:1/1