

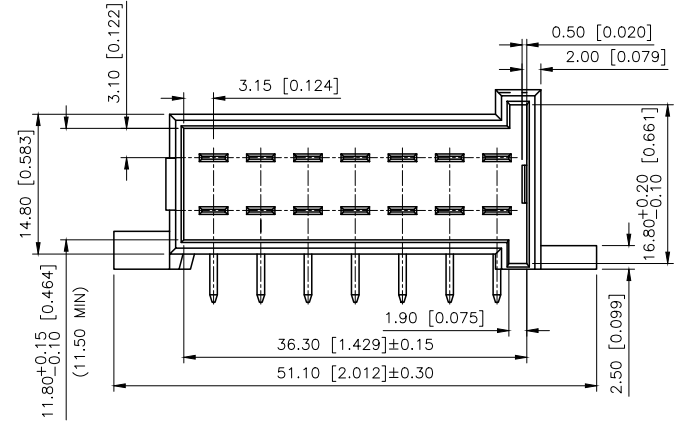
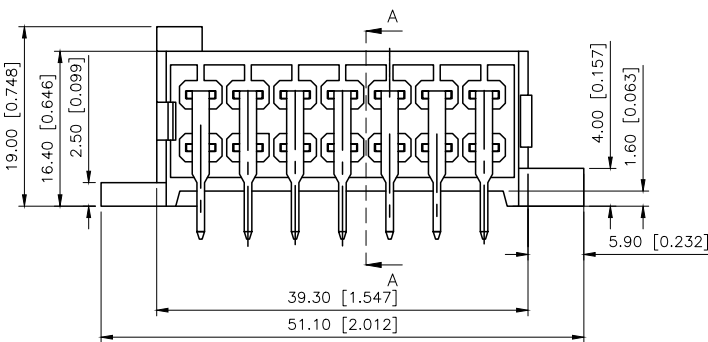
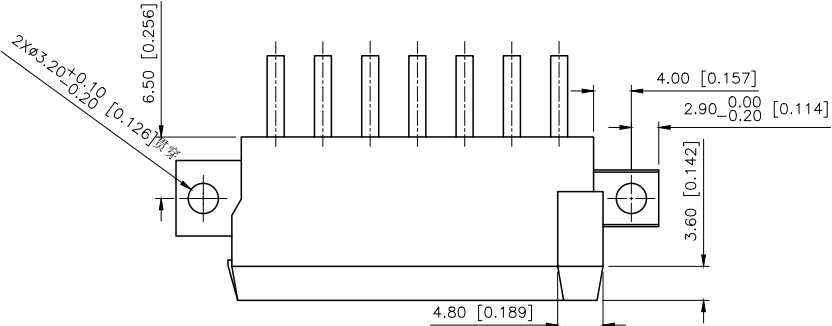
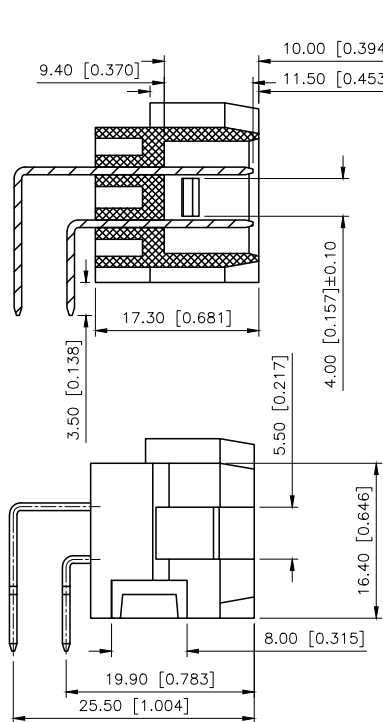



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A) X1	图面升级整理图面	2024.12.23	阿树

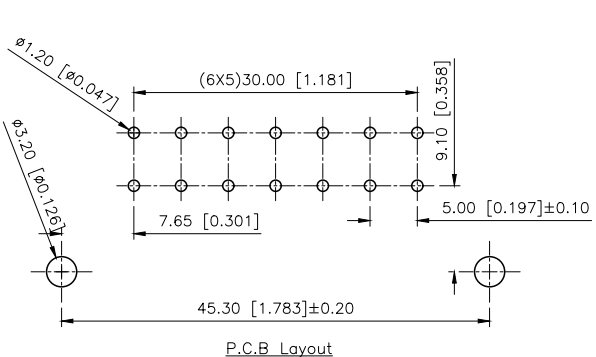


PART NO.:
K 828801 W R-2x07-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

①K:XKBTEK—Car Connector
②XKB Series No
③Category:W—Wafer
④Welding Board Rangle:R—Stright 90°
⑤Row No.Pin No:2x07 Pin
⑥Material:PT—PBT+GF15+V0
⑦Palting:SN—Plated Tin

Current rating:25A AC/DC
额定电流: 25A AC/DC
Temperature range: -40℃—+125℃
温度范围: -40℃—+125℃

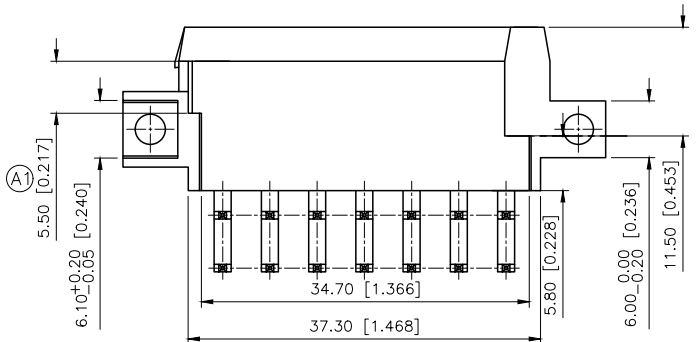

K828801WV-2x07-PTSN				PBT	Brass	K828801H	AuGLAR	±5°	 Connection	DESIGN	阿树	VIEW: 	MODEL TYPE: 5.00mm Automobile connector		
							X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: K828801WR-2x07-PTSN		
							X.x	±0.30							
							X.xx	±0.20							
							X.xxx	±0.15							
PART NO				Material	Material(Pin)	Suitable XKB Housing	UNSPECIFIED TOLERAuces		APPROVED		SIZE: A4	DWG NO.:			
									XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE N/A	PAGE 1/1	REVISION A1