Q14 series

Ø14 mm panel mount LED indicators

DISTINCTIVE FEATURES

10 mm colored diffused epoxy lens or 10 mm water clear super bright LEDs

Prominent and flush bezel styles

(2.8 x 0.8) solder lug/faston terminals, pins or (200 mm long) wire terminations

Custom engraving available

ENVIRONMENTAL SPECIFICATIONS

- IP67 sealing option (EN60529)
- Operating & Storage Temperature Range:
  Rear plastic body: -30 °C to +65° C (-22 °F to +149 °F)
  Rear epoxy body: -40 °C to +85° C (-40 °F to +185 °F)

GENERAL SPECIFICATIONS

- Max Reverse Voltage: 5 V
- Viewing Angle: 30–100° (dependant on model)
- Life Expectancy: 100,000 hours
- Torque: 4 cNm (dependent on option)
- Maximum panel thickness 11 mm

MATERIALS

- Plated brass bezel finished in bright chrome, black chrome or satin grey and moulded polycarbonate rear body

MOUNTING

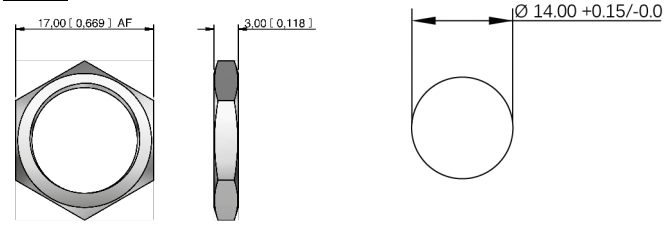

The company reserves the right to change specifications without notice.

All LED characteristics are dependent upon environmental conditions. Therefore published data should be considered nominal and subject to variations.

Q14 series

Ø14 mm panel mount LED indicators

ELECTRICAL SPECIFICATIONS

STANDARD LED INTENSITY

LED COMPONENT SPECIFICATIONS			
	Prominent and Recessed	Flush	Forward Voltage
HE Red	80 mcd	10 mcd	2.0 V
Green	60 mcd	5 mcd	2.2 V
Yellow	50 mcd	4 mcd	2.1 V
Blue	540 mcd	100 mcd	3.3 V
White	1000 mcd	150 mcd	3.3 V
Orange	80 mcd	200 mcd	2.2 V
Bi-color (Typical) (Red/Green)	15/15 mcd	14/10 mcd	2.0V/2.2 V
Tri-color (Typical) (Red/Green/Yellow)	60/50/50mcd	15/10/30 mcd	2.0 V/2.2 V/2.1 V

Bi-color - The color is changed by reversing the polarity of the supply voltage.
Tri-color - The indicator has red and green LEDs, when both connected yellow is produced.

SUPER BRIGHT LED INTENSITY

LED COMPONENT SPECIFICATIONS			
	Prominent and Recessed	Flush	Forward Voltage
HE Red	17,000 mcd	2,000 mcd	2.2 V
Green	11,000 mcd	680 mcd	3.3 V
Yellow	4,000 mcd	350 mcd	2.0 V
Blue	2,500mcd	250 mcd	3.3 V
White	4,400 mcd	250 mcd	3.3 V
Orange	2,800 mcd	300 mcd	2.2 V

HYPER BRIGHT LED INTENSITY

LED COMPONENT SPECIFICATIONS			
	Prominent and Recessed	Flush	Forward Voltage
HE Red	2,800 mcd	800 mcd	2.1 V
Green	2,200 mcd	250 mcd	3.2 V
Yellow	1,300 mcd	250 mcd	2.0 V
Orange	850 mcd	200 mcd	2.1 V

Voltage	Operating Voltage (Min to Max)	Operating Current (Typical All Types)
02 (No Resistor)	1.8 to 3.3 VDC	20 mA max
6 VDC	5.4 to 6.6 VDC	20 mA
12 VDC	10.8 to 13.2 VDC	20 mA
24 VDC	21.6 to 26.4 VDC	20 mA
28 VDC	25.2 to 30.8 VDC	20 mA
110 VAC	99 to 121 VAC	6 mA
220 VAC	207 to 235 VAC	3 mA

* Customer to supply resistor for desired operating current.

- The operating voltage must not be exceeded by more that 10% as this will result in reduced life expectancy
- Luminous intensity is measured at 20 mA on a discrete led unless otherwise stated.
- Luminous intensities and color shades of white LEDs may vary within a batch.
- Luminous intensity will be reduced with lower operating current.

Q14 series

Ø14 mm panel mount LED indicators

BUILD YOUR PART NUMBER

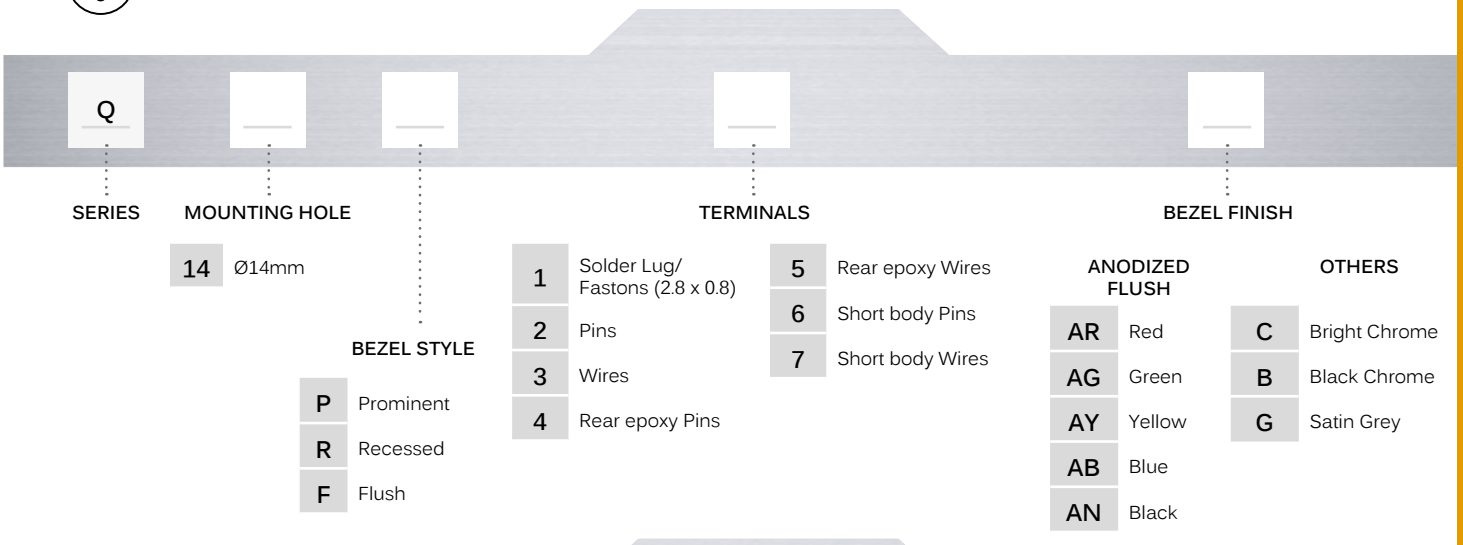

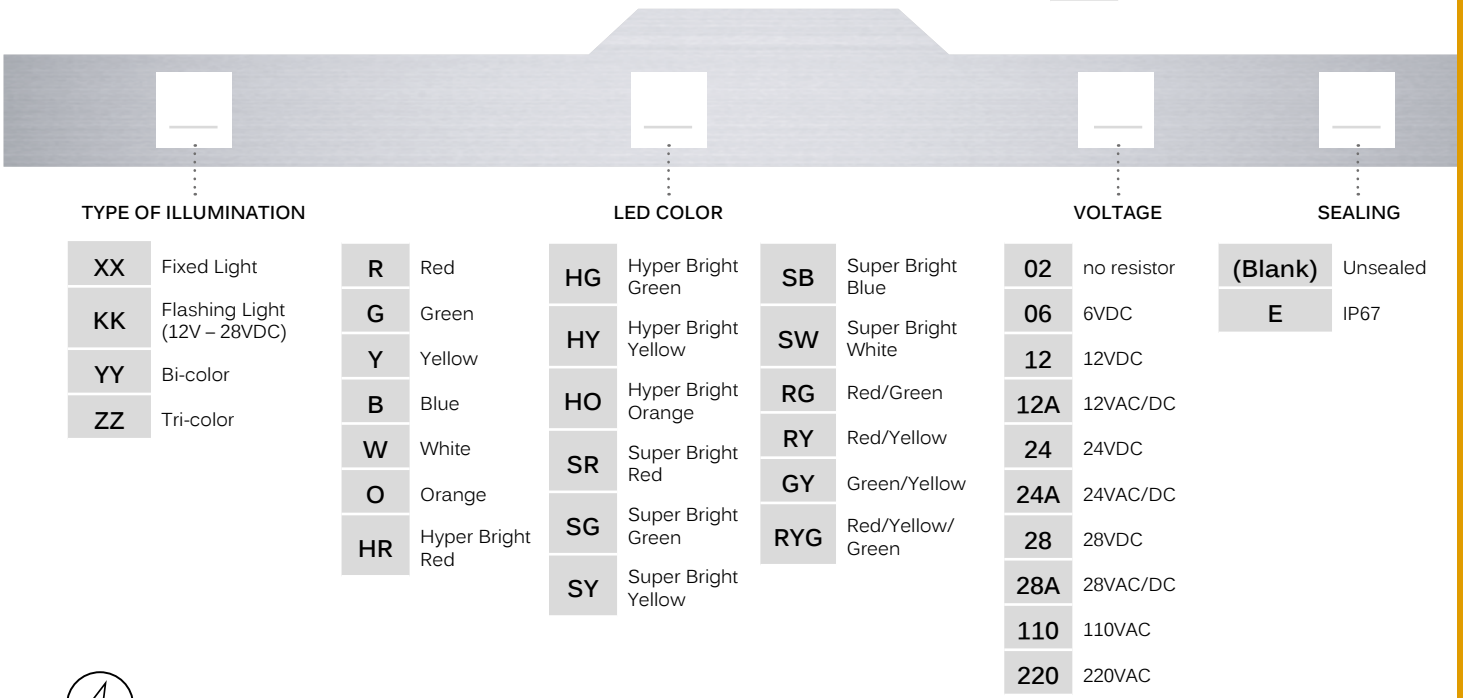

ABOUT THIS SERIES

Notice: please note that not all combinations of above numbers are available.

- Gold faston terminal denotes anode (+), silver terminal denotes cathode (-)
- Standard wire length is 200 mm, 22 AWG UL1061, red wire denotes anode (+), black wire denotes cathode (-) for other wire lengths consult APEM
- For LEDs with alternative voltages and mutlit-voltage options consult APEM
- 110 VAC and 220 VAC, short body terminal options, 5, 6 and 7 please consult the factory
- Bi-color leds, by connecting the gold faston (+) one color is produced, by reversing the supply voltage another color is produced – bi-colors are available up to 28 VDC
- Take care when soldering to the faston terminals (recommended solder temperature 300 °C - 3 sec)
- Short body pins and wires are only available up to 28 VDC
- The Tri-color LED has red and green LEDs when both are connected yellow is produced
- Standard tri-color faston terminals are two anodes (+) and one cathode (-)
- Tri-color wires are one red (+) and one green (+) anode and one black (-) cathode
- Tri-color pins are center (–) cathode, shortest (+) anode pin green, longest (+) anode pin red
- We recommend using Hyperbright or Superbright LEDs for use at 110 VAC and 220 VAC

Q14 series

Ø14 mm panel mount LED indicators

PROMINENT BEZEL

SOLDER LUG/FASTON

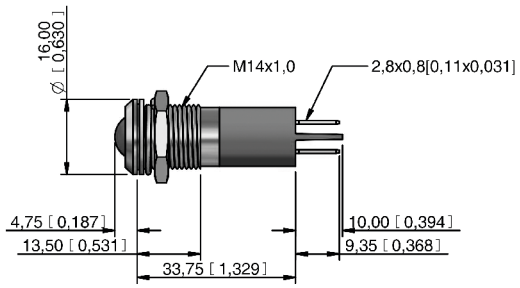

WIRES

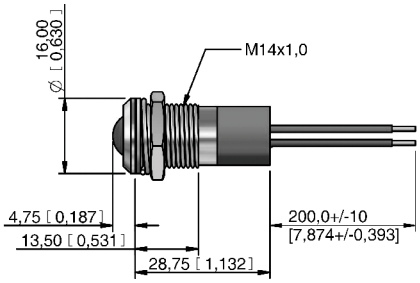

PINS

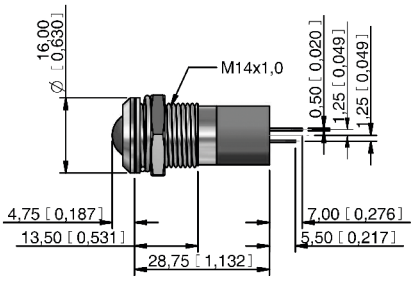

REAR EPOXY WIRES

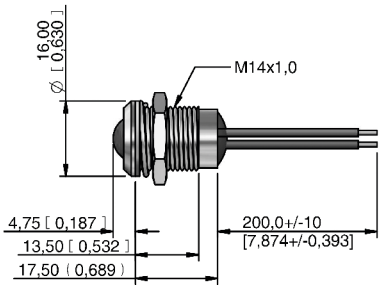

REAR EPOXY PINS

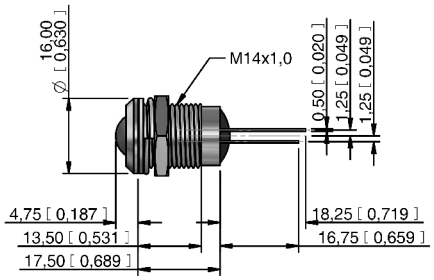

SHORT BODY WIRES

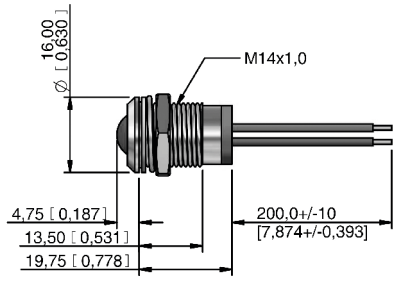

SHORT BODY PINS

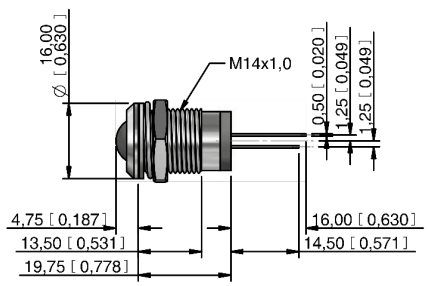

Q14 series

Ø14 mm panel mount LED indicators

FLUSH BEZEL



SOLDER LUG/FASTON

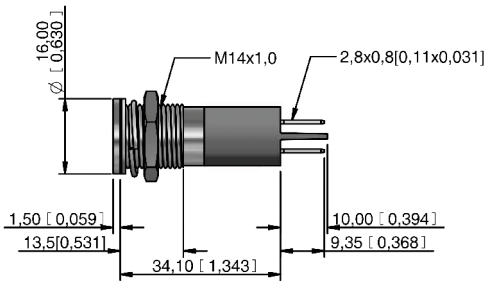

WIRES

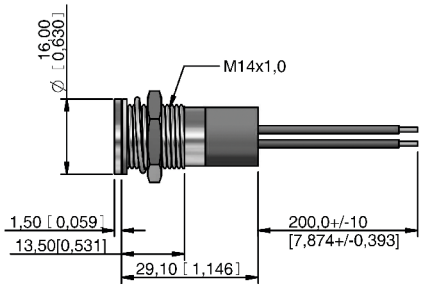

PINS

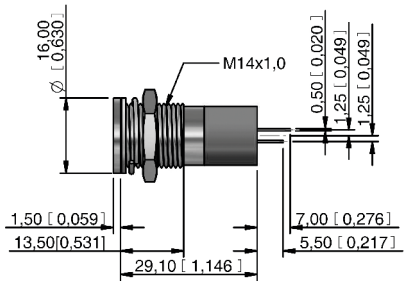

REAR EPOXY WIRES

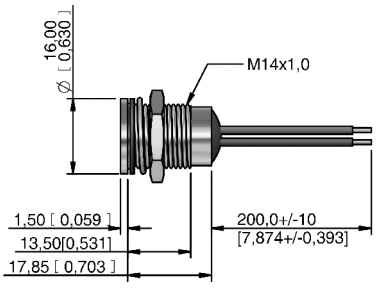

REAR EPOXY PINS

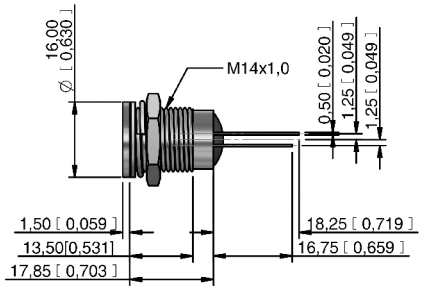

SHORT BODY WIRES

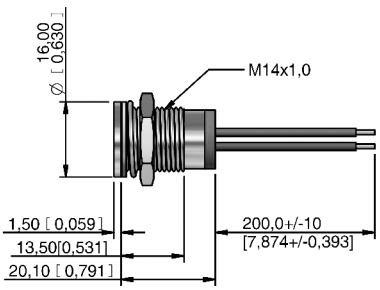

SHORT BODY PINS

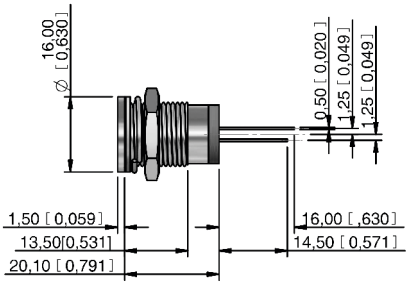

Q14 series

Ø14 mm panel mount LED indicators

RECESSED BEZEL

SOLDER LUG/FASTON

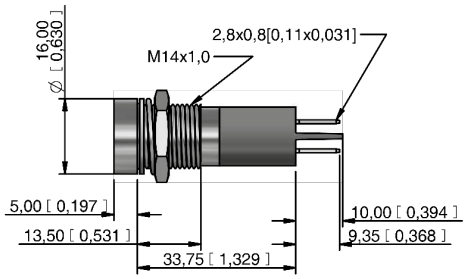

WIRES

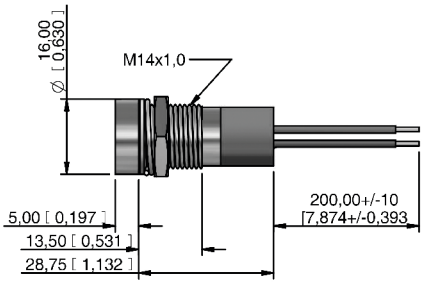

PINS

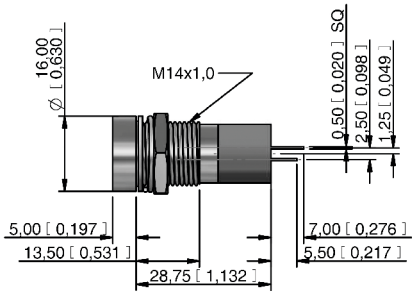

REAR EPOXY WIRES

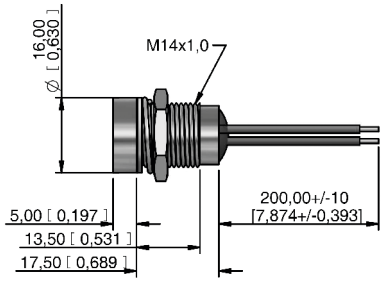

REAR EPOXY PINS

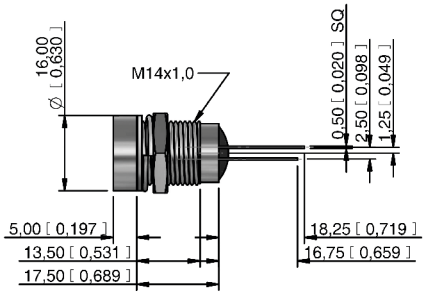

SHORT BODY WIRES

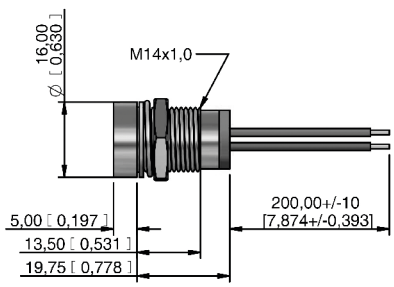

SHORT BODY PINS

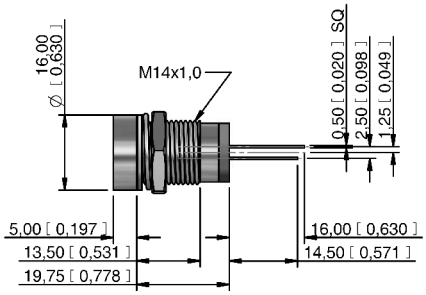

Q14 series

Ø14 mm panel mount LED indicators

CUSTOM ENGRAVING

Some common codes are listed above, for your custom requirements please contact APEM.
Unless specified standard engraving with white infill will be supplied.
Suffix the part number with legend code :

High beam **-0AJ**	Low beam **-097**	Rear fog **-027**	Front fog **-026**	Windscreen wiper **-021**	Windscreen washer **-022**	Ventilator fan **-023**
Turn Signal **-0AH**	Side lights **-098**	Horn **-041**	Hazard warning **-013**	Heating **-018**	Brake test **-0BU**	Arrow **-0K6**
Battery **-0AG**	Oil can **-0GP**	Windscreen heating **-020**	ABS **-086**	Engine coil **-0EL**	Seat belt **-0SB**	USB connection **-0UB**
Steam **-0ST**	ECU **-0EU**	Side step **-0AD**	Air con **-012**	Engine **-040**	Boot/Trunk Release **-0BR**	

CABLE LENGTH AND CONNECTOR

For custom cable length and connectors contact APEM.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Apem:

Q14P1CKKR12 Q14P1CXXSB12 Q14P1CXXSG12 Q14P1CXXSR12 Q14P1CXXSY12 Q14P1CXXG110 Q14P1CXXG12 Q14P1CXXR110 Q14P1CXXR12 Q14P1CXXY110 Q14P1CXXY12 Q14P7BXXSG12E Q14P7BXXSW12E Q14P1CZZRYG02E Q14P1CXXY24E Q14P1CXXG12E Q14P1CXXR12E Q14P1CXXG24E Q14P1CXXY12E Q14P1CZZRYG24E Q14P1CXXR24E Q14P1CZZRYG12E Q14F1BXXB110E Q14F1BXXB12E Q14F1BXXG110E Q14F1BXXG12E Q14F1BXXG24E Q14F1BXXR110E Q14F1BXXR12E Q14F1BXXR24E Q14F1BXXW110E Q14F1BXXW12E Q14F1BXXW24E Q14F1BXXY110E Q14F1BXXY12E Q14F1BXXY24E Q14F1CXXB110E Q14F1CXXB12E Q14F1CXXG110E Q14F1CXXG12E Q14F1CXXG24E Q14F1CXXR110E Q14F1CXXR12E Q14F1CXXR24E Q14F1CXXW110E Q14F1CXXW12E Q14F1CXXW24E Q14F1CXXY110E Q14F1CXXY12E Q14F1CXXY24E Q14P1BXXB110E Q14P1BXXB12E Q14P1BXXG110E Q14P1BXXG12E Q14P1BXXG24E Q14P1BXXR110E Q14P1BXXR12E Q14P1BXXR24E Q14P1BXXW110E Q14P1BXXW12E Q14P1BXXW24E Q14P1BXXY110E Q14P1BXXY12E Q14P1BXXY24E Q14P1BZZRYG12E Q14P1BZZRYG24E Q14P1CXXB110E Q14P1CXXB12E Q14P1CXXG110E Q14P1CXXR110E Q14P1CXXW110E Q14P1CXXW12E Q14P1CXXW24E Q14P1CXXY110E Q14F1BXXB24E Q14F1CXXB24E Q14P1BXXB24E Q14P1CXXB24E Q14F7CXXG12E Q14P1CKKR24E Q14P3CXXSR12E Q14P1GXXSY24E Q14P1CXXR28E Q14P1CXXG28E Q14F3CXXG12E Q14P1CXXB28E Q14F3BXXB24E Q14F3BXXG28E Q14F3BXXR28E Q14P3CXXG12E Q14F3BXXG24E Q14P3BXXB24E Q14F3BXXG12E Q14P3BXXG24E Q14F3BXXR24E Q14F3CXXR24E Q14P3BXXB12E Q14F3BZZRYG12E Q14F3CXXY24E Q14P1CXXG06E