
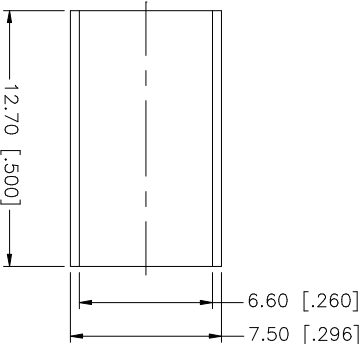

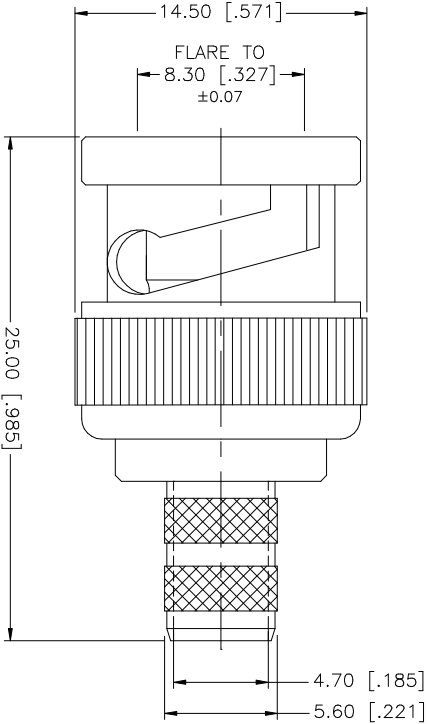


REV.	DATE	DESCRIPTION
A	11/14/97	ADD CONTACT PIN
B	07/01/04	UPDATE DRAWING FORMAT
C	02/21/06	ADD "B1695A" TO PART DESCRIPTION / .255" HEX CRIMP

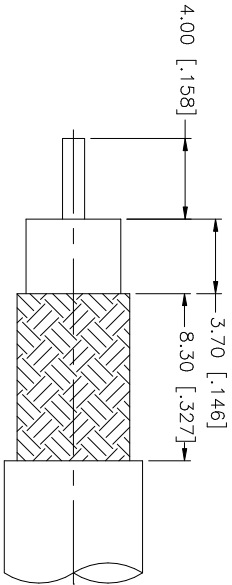

NOTE:

1. CRIMPED FERRULE – HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN – HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex BNC CRIMP PLUG (FOR RG-6/U, B1695A PLENUM CABLE) 112519							
8						DRAWN	G.R.S.					02/21/06			
7						CHECKED									
6						ISSUED									
5						SHEET	1 OF 1								
4	FERRULE	COPPER	NICKEL	1		PART DESCRIPTION			PART NO.						
3	CONTACT PIN	BRASS	GOLD	1		PART NO.			PART NO.						
2	INSULATOR	DELIRIN	NATURAL	1		PART NO.			PART NO.						
1	BODY	BRASS	NICKEL	1		PART NO.			PART NO.						
	DESCRIPTION	MATERIAL	FINISH	QTY		DO NOT SCALE DRAWING	CAD FILE	C:/112/112519.DWG	DWG. NO.	112519.DWG	REV.	C	SIZE	A	SCALE