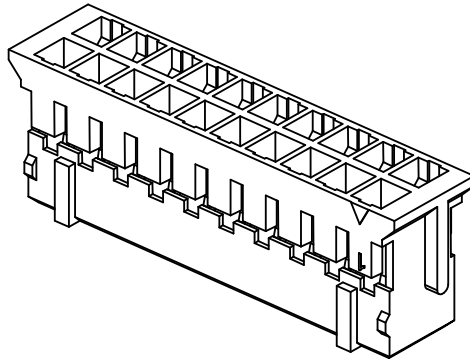
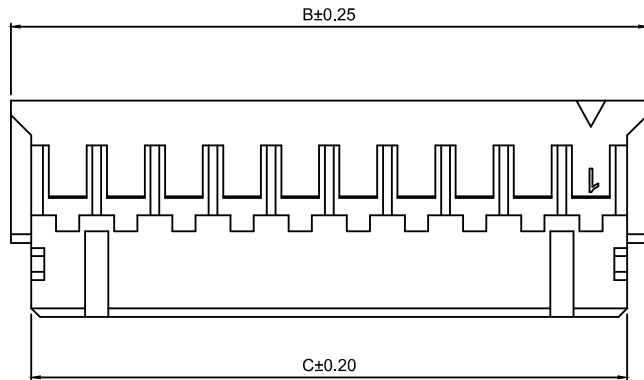
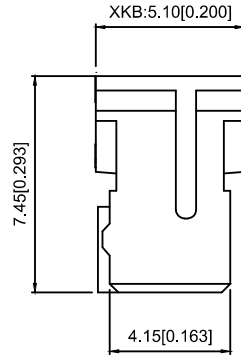
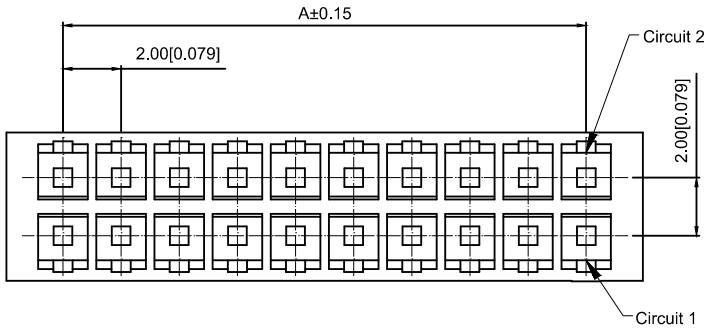


#### Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:800V AC/minute

耐受电压: 800V AC/分钟

Temperature range:-25℃~+85℃

温度范围: -25℃~+85℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤10mΩ

接触电阻: ≤10mΩ

After environmental testing:≤20mΩ

环境测试后: ≤20兆欧

#### X2026 H - 2x12 HF-N0

① ②③ ④ ⑤ ⑥ ⑦

1.Series No

2.Category:H-HSG

3.Appearance type:Blank-Ordinary

4.Row No-Pin No:2xXX-2x02P~2x22P

5.Plug the Pin&special No:

HF-Halogen Free

6.Material:NO-PA66 94V-0

7.Color:Blank-Natural Color

BK-Black

| poles | Dimensions(mm) |       |       | poles | Dimensions(mm) |       |       | Poles | Dimensions(mm) |       |       |
|-------|----------------|-------|-------|-------|----------------|-------|-------|-------|----------------|-------|-------|
|       | A              | B     | C     |       | A              | B     | C     |       | A              | B     | C     |
| 2x02  | 2.00           | 5.90  | 4.50  | 2x09  | 16.00          | 19.90 | 18.50 | 2x16  | 30.00          | 33.90 | 32.50 |
| 2x03  | 4.00           | 7.90  | 6.50  | 2x10  | 18.00          | 21.90 | 20.50 | 2x17  | 32.00          | 35.90 | 34.50 |
| 2x04  | 6.00           | 9.90  | 8.50  | 2x11  | 20.00          | 23.90 | 22.50 | 2x18  | 34.00          | 37.90 | 36.50 |
| 2x05  | 8.00           | 11.90 | 10.50 | 2x12  | 22.00          | 25.90 | 24.50 | 2x19  | 36.00          | 39.90 | 38.50 |
| 2x06  | 10.00          | 13.90 | 12.50 | 2x13  | 24.00          | 27.90 | 26.50 | 2x20  | 38.00          | 41.90 | 40.50 |
| 2x07  | 12.00          | 15.90 | 14.50 | 2x14  | 26.00          | 29.90 | 28.50 | 2x21  | 40.00          | 43.90 | 42.50 |
| 2x08  | 14.00          | 17.90 | 16.50 | 2x15  | 28.00          | 31.90 | 30.50 | 2x22  | 42.00          | 45.90 | 44.50 |

|                  |                                |                       |                    |
|------------------|--------------------------------|-----------------------|--------------------|
| X2026H-2x12-N0BK | Nylon 66 UL 94V-0 Black        | X2026T                | X2026W             |
| X2026H-2x12HF-N0 | Nylon 66 UL 94V-0 Halogen Free |                       |                    |
| X2026H-2x12-N0   | Nylon 66 UL 94V-0              |                       |                    |
| PART NO          | Material                       | Suitable XKB Terminal | Suitable XKB Wafer |

Wire to board connector

|                                                   |             |  |      |         |             |                                      |  |      |  |                                                                                             |                                              |              |                |
|---------------------------------------------------|-------------|--|------|---------|-------------|--------------------------------------|--|------|--|---------------------------------------------------------------------------------------------|----------------------------------------------|--------------|----------------|
|                                                   |             |  |      |         |             | DSND                                 |  | DATE |  | SCALE: N/A                                                                                  | MODEL TYPE:<br>2.00mm Crimp Style Connectors |              |                |
|                                                   |             |  |      |         | units: mm   | DWN                                  |  | DATE |  | VIEW:  | PART NO.:<br>X2026H-2x12HF-N0                |              |                |
| Δx                                                |             |  |      |         |             | CHKD                                 |  | DATE |  | UNIT: mm/in                                                                                 | DWG NO.:<br>X-X2026H-2x12HF-N0               |              |                |
| Δx                                                |             |  |      |         | X.X ±0.2mm  | APPD                                 |  | DATE |  | SIZE: A4                                                                                    |                                              |              |                |
| Δx                                                |             |  |      |         | X.XX ±0.1mm |                                      |  |      |  |                                                                                             |                                              |              |                |
| MARK                                              | DESCRIPTION |  | DATE | REVISED | APPROVED    | X.XXX ±0.05mm                        |  |      |  |                                                                                             |                                              |              |                |
| REVISIONS                                         |             |  |      |         |             | UNSPECIFIED TOLERANCES               |  |      |  |                                                                                             |                                              |              |                |
| www.xk-dg.cn   www.helloxkb.com   www.helloxkb.cn |             |  |      |         |             | XKB INDUSTRIAL PRECISION CO.,LIMITED |  |      |  |                                                                                             | WEIGHT<br>1.0g                               | SHEET<br>1/1 | REVISION<br>A0 |