
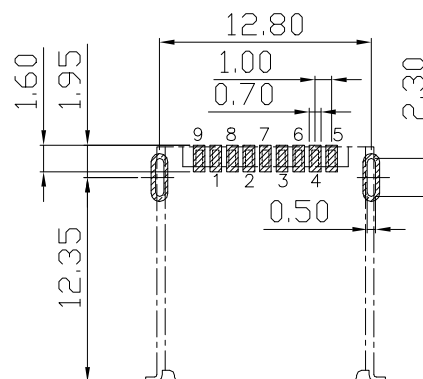
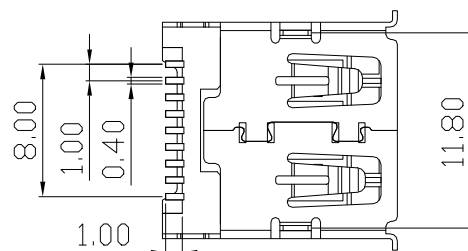
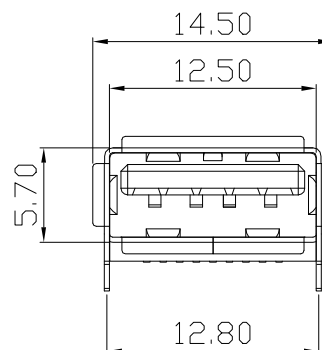
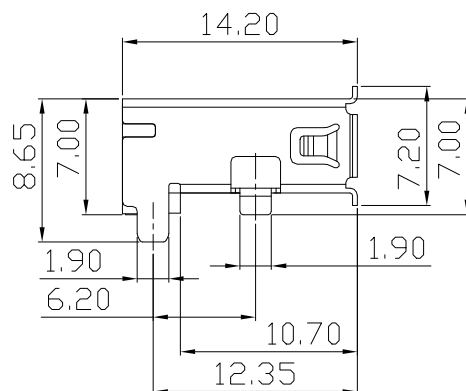



RoHS 2.0

PIN NUMBER	SIGNAL NAME
PIN 1	Vbus
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	StdA_SSRX-
PIN 6	StdA_SSRX+
PIN 7	GND_DRAIN
PIN 8	StdA_SSTX-
PIN 9	StdA_SSTX+
SHELL	GND




RECOMMEND PCB LAYOUT (±0.05)

NOTES:

- MATERIAL:
 - HOUSING: LCP ,COLOR IS BLUE;
 - CONTACT: BRASS, (H65 T=0.20mm);
 - SHELL: COLD ROLLED IRON (SPCC, T=0.3mm);
- FINISH:
 - TERMINAL:
CONTACT AREA: GOLD PLATED G/Fu";
SOLDER AREA: PLATED OVER TIN;
 - SHELL: NI PLATED OVER ALL ;
- ELECTRICAL:
 - VOLTAGE RATING: 30 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 30MILLIOHMS MAX. ; 3.4. WITHSTAND VOLTAGE: 500 VAC RMS
50 (60) Hz, 1MIN. ;
 - INSULATION RESISTANCE: 100MEGOHMS MIN
@500V DC;
- MECHANICAL:
 - MATING FORCE: 35N MAX. ;
 - UNMATING FORCE: 5~35N;
 - OPERATING LIFE: 1500 CYCLES MIN. ;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40° C~+85° C; 5.2. OPERATION TEMPERATURE RANGE: -25° C~+70° C;
- SALT SPRAY TEST: 24H(EXCLUDING RIVETED BENDS)

C	外壳	SPCC	镀镍	
B	端子	黄铜H65	焊料区镀锡 接触区镀金G/F	
A	基座	LCP	蓝色	
序号	品 名	材 质	电镀/ 颜色	备 注

深圳市富港科技有限公司

UNLESS OTHERWISE, GENERAL TOLERANCE: X. xxx ±0.10 X. xx ±0.20 X. x ±0.30 ANGULAR: X. xx° ±1° X. x° ±3° X. ° ±5°	NAME: 3.0 A母贴板直脚卷边			P/N: DWG NO.: FG-ST-003-001J-TB		
	THIRD ANGLE PROJECTION 		UNIT: mm	SCALE 1:1	SIZE: A4	SHEET: 1/1
DRAWN: Q S X		CHECKED:			APPROVED	