


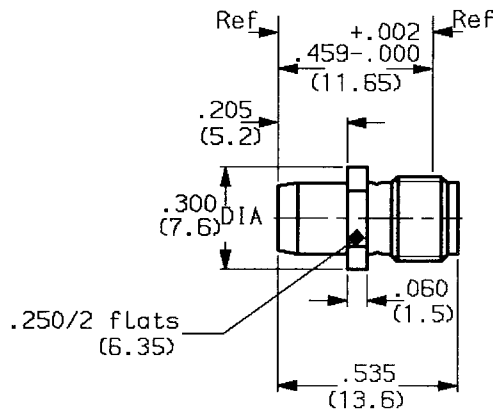

MOUNTING HOLE

2.5

WEIGHT 0 oz (..... g)

CABLES : -

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0 - 18	GHz
TEMPERATURE RATING	-65 / +125	°C
VSWR	1.05+0.005fGHz	Max
RF INSERTION LOSS	-	dB Max
VOLTAGE RATING	350	Vrms
DIELECTRIC WITHSTANDING VOLTAGE	1000	Vrms
INSULATION RESISTANCE	5000	MΩ
HERMETIC SEAL	-	cc/s cm3/s
LEAKAGE (pressurized only)	-	psi kg/cm2
-	-	-
-	-	-

STANDARDISATION	-
CABLE RETENTION	0 Lb Max NA N Max
CENTER CONTACT RETENTION	
Axial force - mating end	6.075 Lb Max 27 N Max
Axial force - opposite end	6.075 Lb Max 27 N Max
Torque (Max)	- inch.oz cm.N
MATING TORQUE RECOMMENDED	- inch. Lb cm.N
-	-
-	-

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
Body	Stainless steel	Passivated
Outer contact	Stainless steel	Passivated
Center contact	Beryllium copper	Gold over nickel
Insulators	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
9150	91-11-009	added Flats on the body	Picton E.	09-12-91

Initiated on 18 04 89

Superseded on - - - - -

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R191352001](#)