

Pitch:2.00mm(0.079 ")
Female Header Single Row S.M.T Right Angle Type

ELETE
—Professional Connecting Solution—
HFLSP40-Series


Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000M Ω Min
Dielectric Withstanding:500V AC
Contact Resistance:20m Ω Max
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

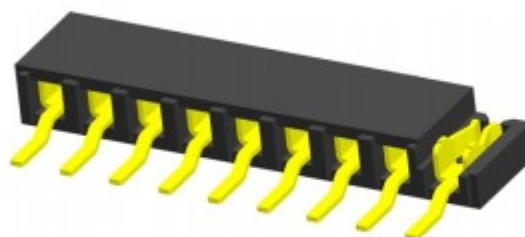


Mating with




HMLSSXX







HMLSNXX




HMLSRH20




HMLSNH15/
HMLSVH15

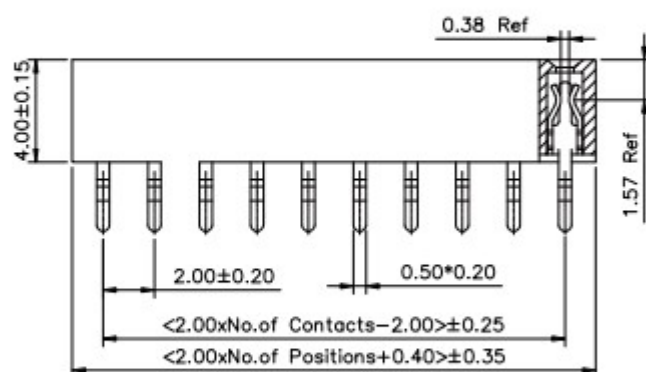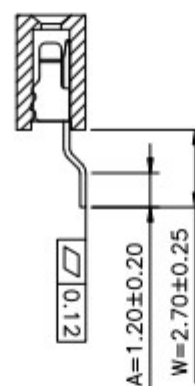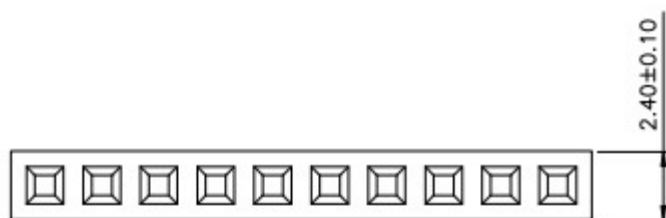

HMLSSH20



HMLSR20



HMLSP15

